



HDX-66C-CVL

Dakota Digital HDX Instrument Installation For 1966-'67 Chevelle, Malibu and El Camino

Your new HDX-66C-CVL kit includes:



Universal Sender Pack

Buzzer

Installation Manuals

HDX Display



Main Harness

Control Box

Installation


1. First, remove the stock gauge cluster from the dash. There are four mounting tabs on both the top and on the bottom of the bezel that secure the assembly to the dash. Next, remove and retain the seven screws holding the metal gauge housing to the bezel.



2. Secure the HDX system to the bare bezel using the seven screws removed in Step One.



3. Connect the provided Main Harness and the Buzzer (optional for audio feedback) to the back of the HDX system.

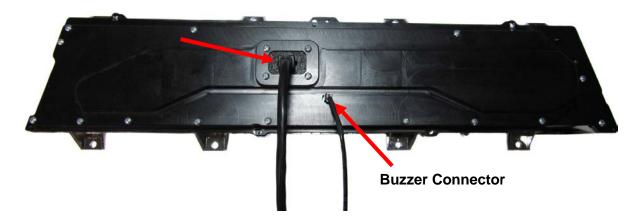

4. Re-install the cluster into the vehicle using the factory hardware and refer to the main manual for wiring instructions to complete the HDX installation.



▲ WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov



4510 W. 61st St. North Sioux Falls, SD 57107 www.dakotadigital.com

Phone (605) 332-6513 Fax (605) 339-4106

dakotasupport@dakotadigital.com Copyright 2011 - Dakota Digital, Inc.