

# VHX-54C-PU


Dakota Digital VHX Instrument Installation  
For '54 and '55 "First Series" Chevy pickup systems

Your new VHX-54C-PU kit should include:




## Installation


1. Remove the stock gauges from the dash. They are held in place by three nuts on the tabs of the stock gauge housings. Save the nuts as they will be re-used to secure the new VHX kit.
2. Remove the clear protective tape from the new VHX gauges to prepare them for installation. Secure the new VHX gauges back into the dash re-using the original nuts, six total. The photo, at right, is of the '47-'53 Chevy Pickup but the idea is the same, except the '54 has three mounting tabs instead of four.

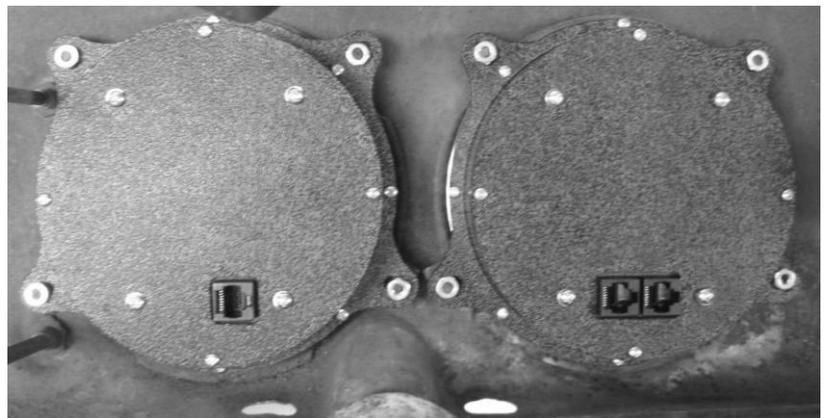

3. Connect the two halves of the new VHX system with the supplied 12" CAT5 cable. Also, route the 3' cable towards the control box location and connect it to the display.

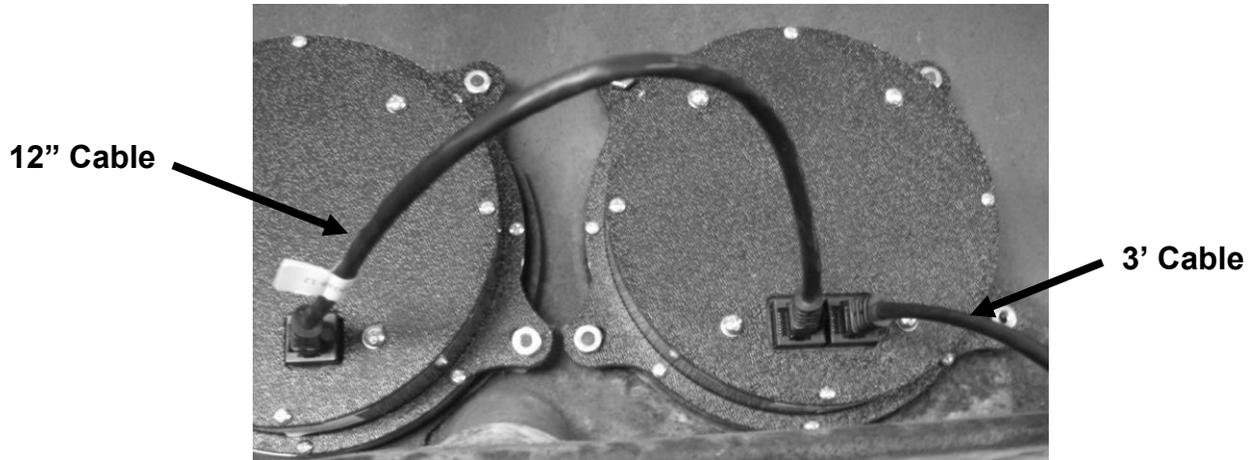

4. Display installation is complete, refer to the main manual for wiring instructions to complete the VHX installation.

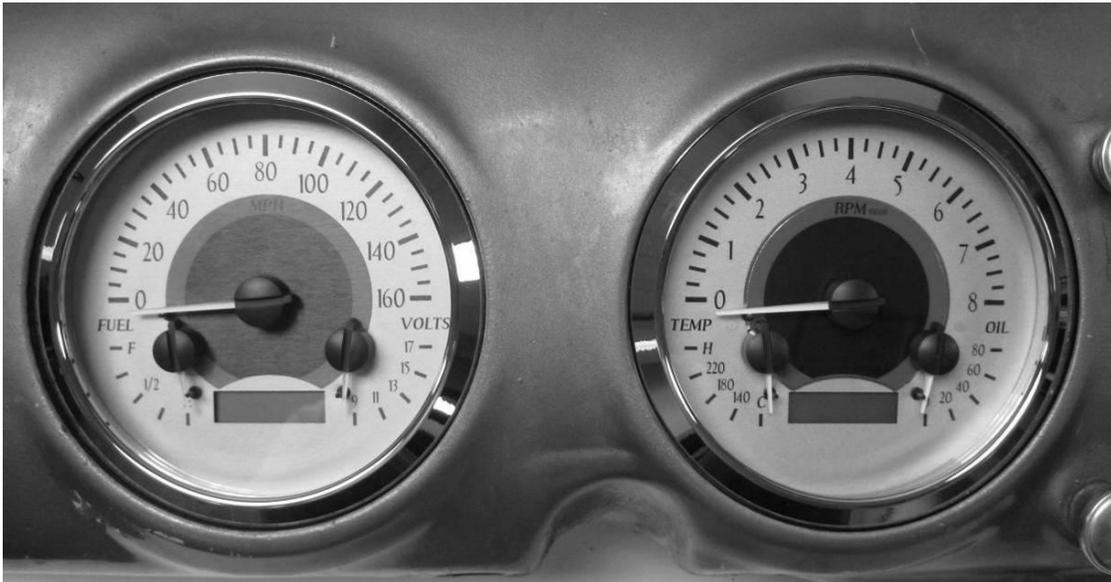

4510 W. 61st St. North  
Sioux Falls, SD 57107  
www.dakotadigital.com  
dakotasupport@dakotadigital.com

Phone (605) 332-6513  
Fax (605) 339-4106

Copyright 2011 - Dakota Digital, Inc.