

VHX-65F-GAL

Dakota Digital VHX Instrument Installation For 1965-'66 Ford Galaxie

Your new VHX-65F-GAL kit includes:




Installation


1. Installation of this VHX instrument system requires considerable modification to the stock instrument housing. To reduce the chance of damaging other interior components, the wiring harness, or any other part of the car, it is advised to completely remove the gauge housing to perform the required modifications.



2. Remove the eight (8) push pins so you can completely remove all the original gauge pieces.

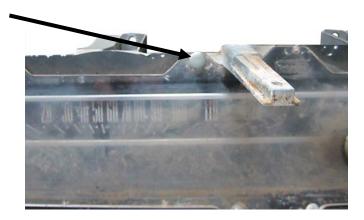

3. All raised bosses will need to be trimmed flush while two sections will need to be removed.

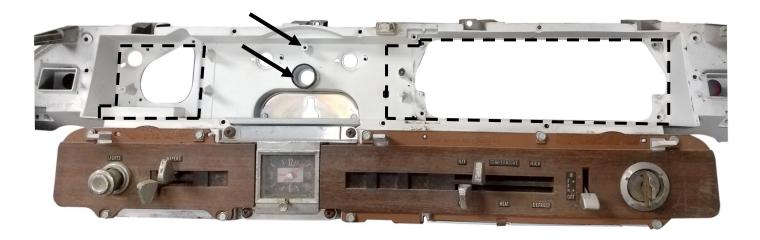


4. Ensure all areas are properly cut by placing the VHX gauge into the gauge housing and making sure the back of the lens sits on the housing and is not raised.



5. Mount the VHX gauge to the housing using the provided eight (8) push in retainers.



6. Connect the provided CAT5 cable to the back of the VHX gauge.

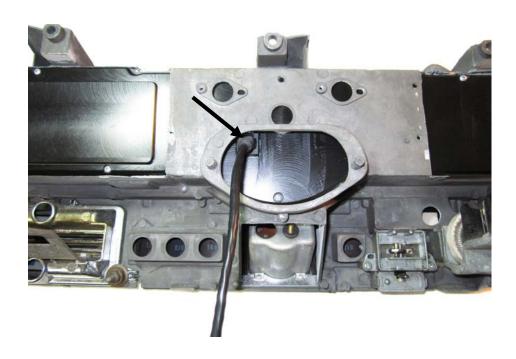

7. The gauge housing is now ready to re-install into the vehicle using stock hardware. Take care when routing the CAT5 cable to the control box mounting location. Refer to the main manual to complete the VHX installation.



AWARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov



4510 W. 61st St. North Sioux Falls, SD 57107 www.dakotadigital.com dakotasupport@dakotadigital.com Phone (605) 332-6513 Fax (605) 339-4106

© Copyright 2017 - Dakota Digital