



VHX-66C-CVL

Dakota Digital VHX Instrument Installation
For 1966-'67 Chevelle, Malibu and El Camino

Your new VHX-66C-CVL kit includes:



VHX Display

Universal Sender Pack


Installation Manuals

CAT5 Cable

Control Box

Installation


1. First, remove the stock gauge cluster from the dash. There are four mounting tabs on both the top and on the bottom of the bezel that secure the assembly to the dash. Next, remove and retain the seven screws holding the metal gauge housing to the bezel; locations are shown with arrows below. These screws will be used to secure the new instrument panel.

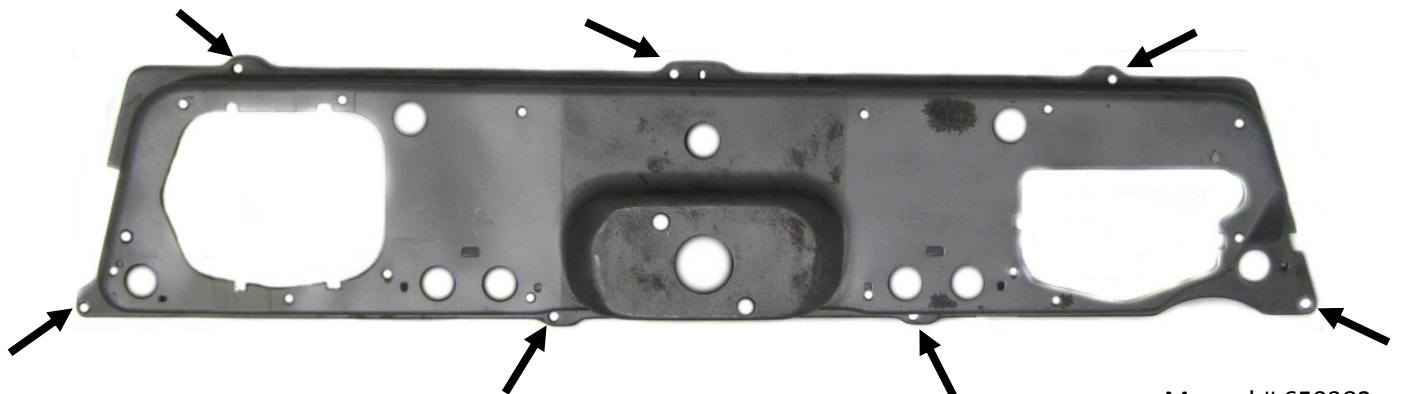


2. Remove the protective tape from the clear lens and install the VHX system into the bezel. Watch carefully as you insert the system so you don't scratch or damage the lens. The VHX system should align tightly, and the lens should sit flush with the bezel. Some reproduction bezels may require modification on the top side for the holes to line up properly.



3. Secure the VHX system to the bezel with the seven screws removed in Step One.

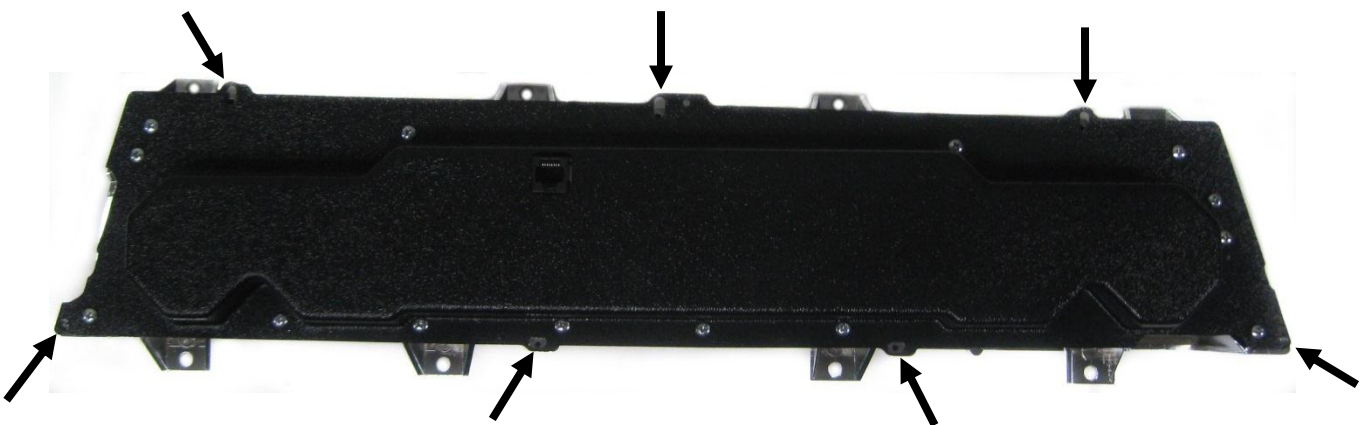

4. Connect the CAT5 cable to the system. As the assembled cluster is installed into the dash, take care when routing this cable to the control box.

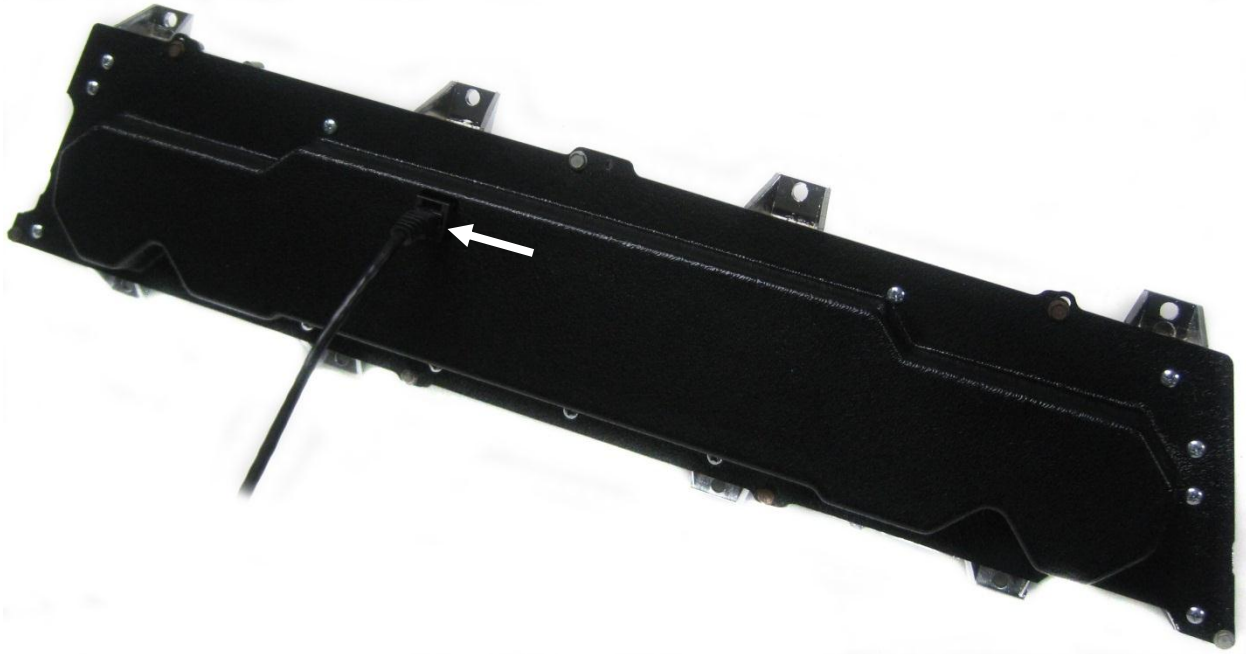

5. Re-install the cluster into the car and refer to the main manual for wiring instructions to complete the VHX installation.



4510 W. 61st St. N., Sioux Falls SD 57107
Phone: (605) 332-6513 Fax: (605) 339-4106
www.dakotadigital.com
dakotasupport@dakotadigital.com