

HDX-40F

Dakota Digital HDX Instrument Installation
For 1940 Ford Car
1940-'47 Ford Pickup

Your new HDX-40F kit includes:

HDX Display



Universal Sender Pack



Buzzer




Installation Manuals



Ford Speed Adapter



Main Harness




Control Box

Installation

1. Remove the stock gauge cluster from the dash. The mounting hardware will be re-used.




2. From the rear of the dash; insert the HDX system into the opening and securely mount using the stock hardware from disassembly

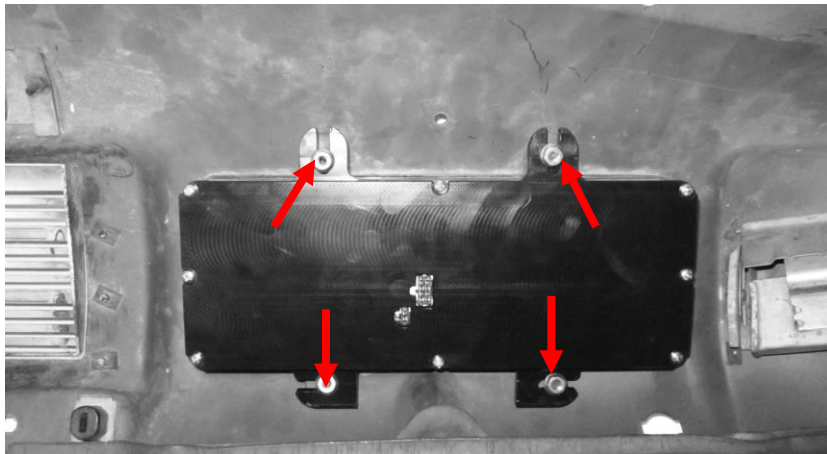

3. Connect the provided harness and the buzzer (optional for audio feedback) to the back of the HDX system.

Buzzer Connector

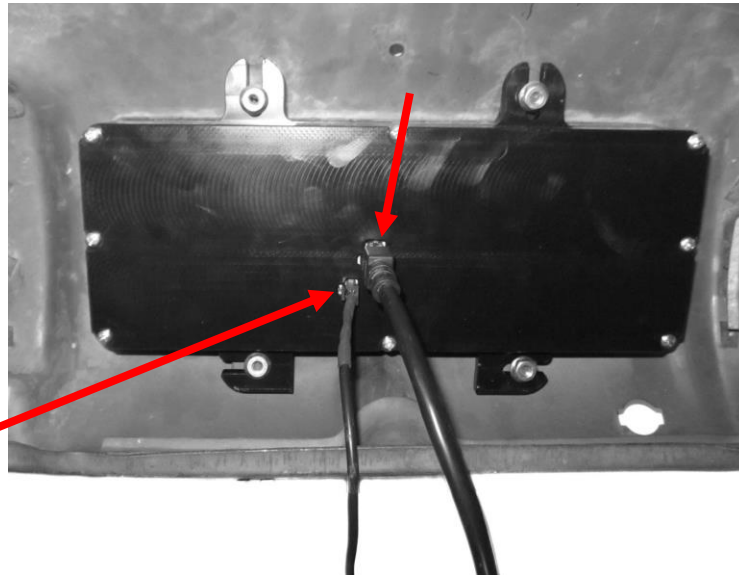

4. Refer to the main manual for wiring instructions to complete the HDX installation.



⚠ WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov



4510 W. 61st St. North
Sioux Falls, SD 57107
www.dakotadigital.com
dakotasupport@dakotadigital.com

Phone (605) 332-6513
Fax (605) 339-4106

Copyright 2011 - Dakota Digital, Inc.