




## VHX-66F-BRO

Dakota Digital VHX Instrument Installation  
For 1966-'77 Ford Bronco

Your new VHX-66F-BRO kit should include:

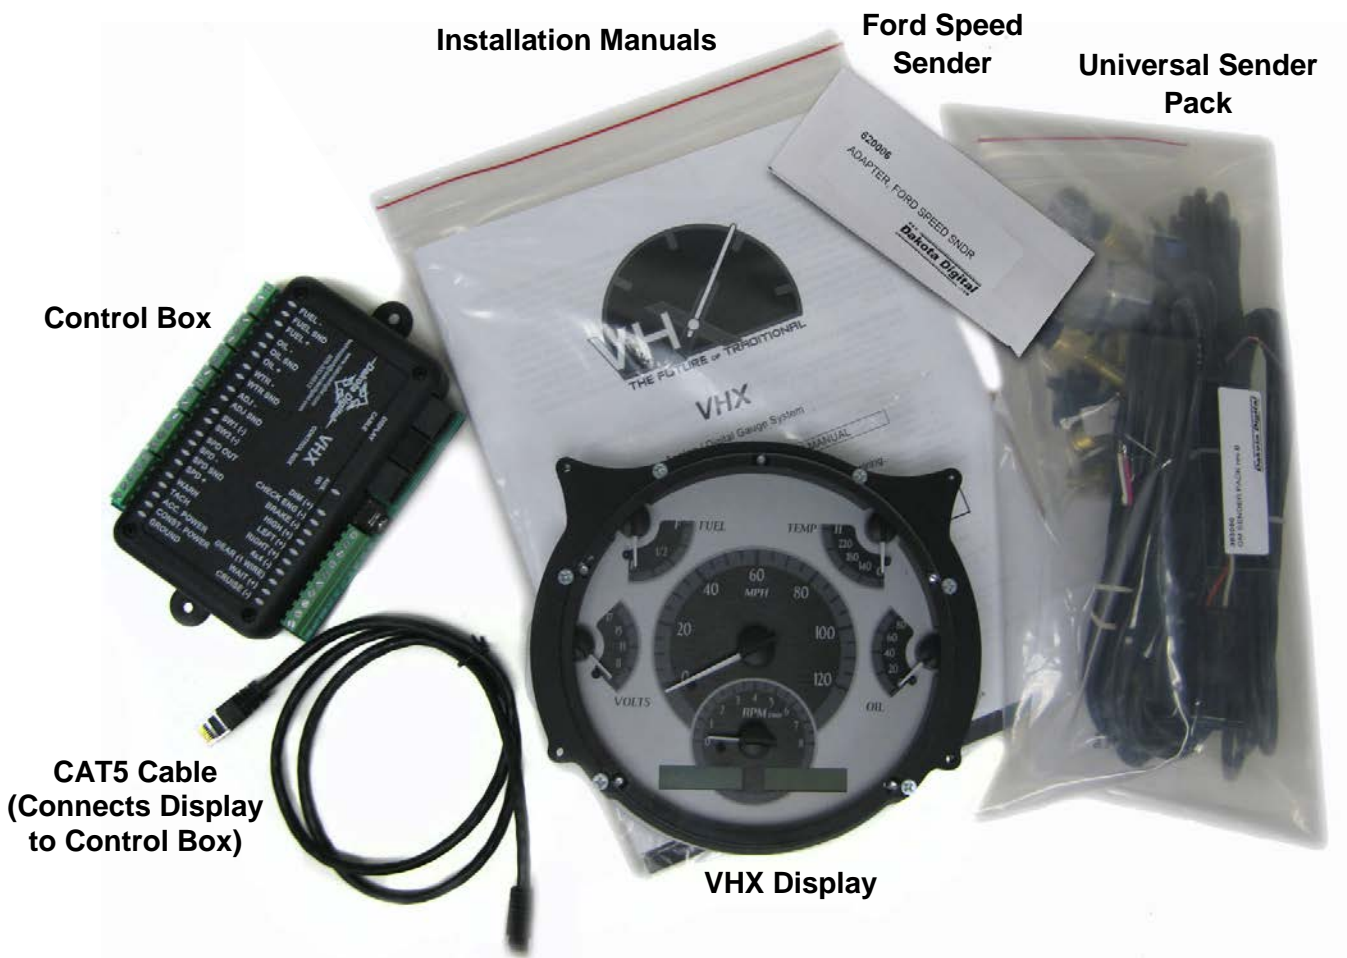

## Installation

1. Remove the stock gauges from the dash. Remove the four screws holding the gauges cluster to the dash. These screws will be re-used for the VHX installation.



2. Remove these four screws to separate the bezel from the gauges and set aside for reassembly.



3. Remove the gauges, separator plate, and lens. The only part that will be re-used is the stamped bezel and the screws that mount the bezel. Now is a good time to clean the bezel.



4. Remove the protective tape from the clear lens and install the VHX system into the bezel. Watch carefully as you insert the system so you don't scratch or damage the lens.



5. Secure the VHX system to the bezel with the four screws from disassembly. The VHX system should align tightly and sit flush with the bezel.



6. Connect the CAT5 cable to the system so it can be routed and connected to the control box as the system is re-installed



7. Install system with original bezel back into the dash with the four original screws



8. Re-install the cluster into the truck and refer to the main manual for wiring instructions to complete the VHX installation.



4510 W. 61<sup>st</sup> St. N., Sioux Falls SD 57107  
Phone: (605) 332-6513 Fax: (605) 339-4106  
[www.dakotadigital.com](http://www.dakotadigital.com)  
[dakotasupport@dakotadigital.com](mailto:dakotasupport@dakotadigital.com)