



# VHX-69C-IMP

Dakota Digital VHX Instrument Installation  
For 1969-70 Chevrolet Impala and Caprice

Your new VHX-69C-IMP kit includes:

## VHX Display



## Universal Sender Pack



## Installation Manuals



36" CAT5 Cable




## Gear Indicator Black Out

## Overdrive Gear Indicator Plate



## (6) 1/4" Screws

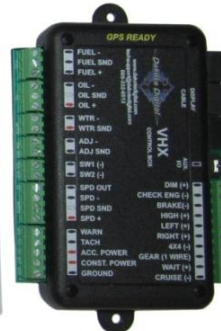

Control Box

## (10) Indicator Harnesses




## Installation

1. First, remove the stock gauge cluster from the dash. Retain the factory hardware for reassembly.



- Remove the stock gauge cluster from the bezel by removing the eight (8) screws. Retain hardware for reassembly.

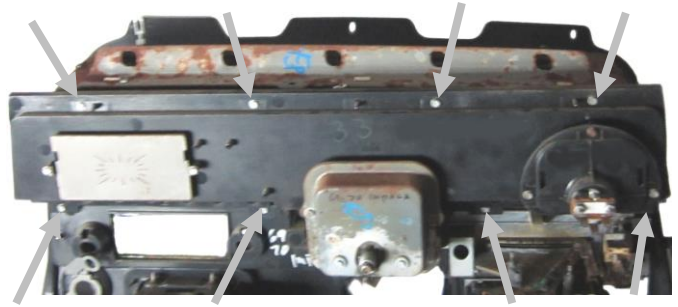

- The indicator plate will be reused on the VHX system. Use a small flathead screwdriver or pick to push out the four (4) hardware covers then remove the screws. The covers will be reused but the screws will not.



- The stock gear indicator can be used or it can be swapped out with the overdrive plate or blacked out plate. Remove and set aside the two screws, they will not be reused.


- The bottom gear indicator plate will need to be trimmed. Make a cut along the flanged edge as shown below.



- Mount the gear indicator with the desired indicator plate to the VHX system using two (2) of the supplied 1/4" screws.




7. There are six (6) small tabs on the back of the indicator plate that will need to be trimmed for proper fit. The locations are shown below.

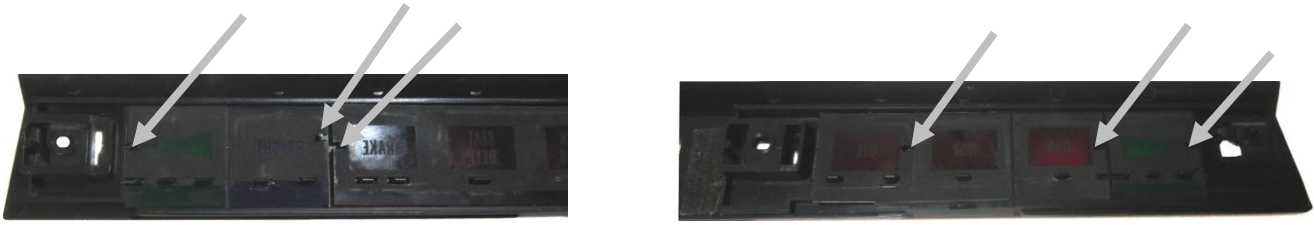


8. Mount the indicator plate to the VHX system using the remaining supplied 1/4" screws and push the hardware covers back into place.




9. Mount the VHX system to the stock bezel using the eight (8) factory screws.

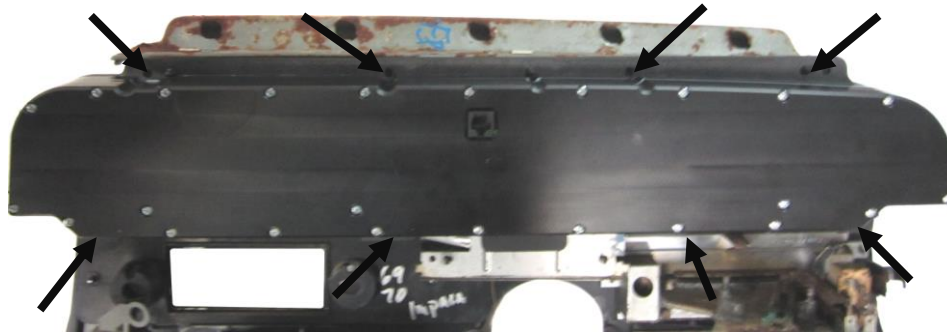

10. Attach the provided CAT5 cable to the back of the VHX system and carefully route the open ends to the control box mounting location.

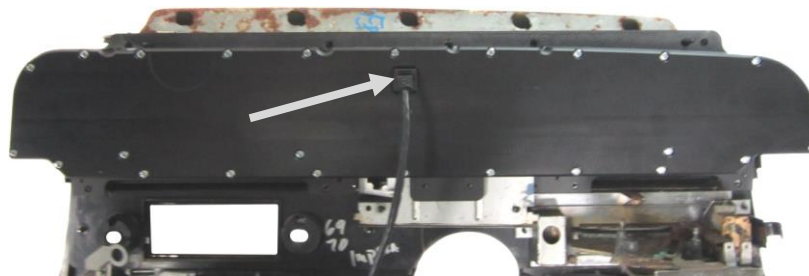

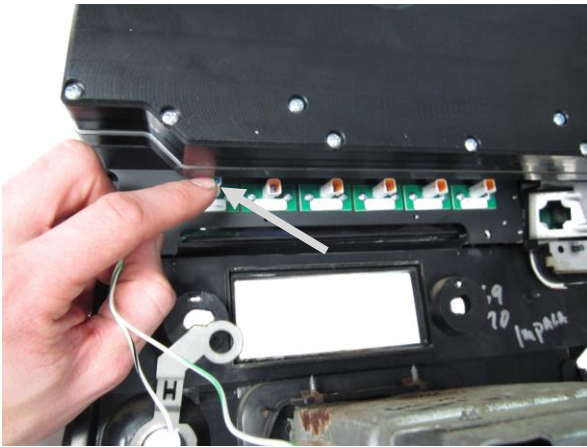

11. If desired the original indicators can be used by connecting the provided harnesses and making the following connections:  
WHITE\GREEN wire to INDICATOR CIRCUIT  
WHITE\BLACK wire to CHASSIS GROUND

12. Re-install the gauge bezel using the factory hardware and refer to the main manual for wiring instructions to complete the VHX installation.



**⚠WARNING:** This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)



4510 W. 61st St. North  
Sioux Falls, SD 57107  
[www.dakotadigital.com](http://www.dakotadigital.com)

[dakotasupport@dakotadigital.com](mailto:dakotasupport@dakotadigital.com) Copyright 2011 - Dakota Digital, Inc.

Phone (605) 332-6513  
Fax (605) 339-4106