




HDX-57C

Dakota Digital HDX Instrument Installation For 1957 Chevy car

Your new HDX-57C kit includes:

HDX Display



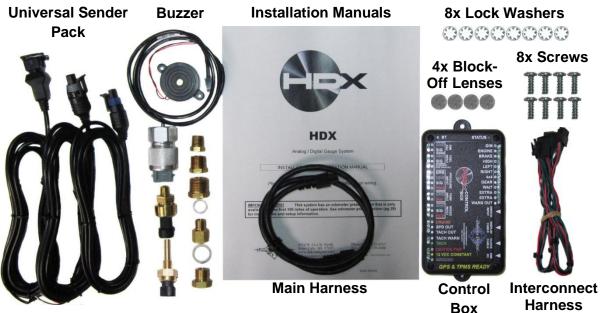

Installation

1. Remove the stock instrument cluster, then remove the original gauges from the back of the housing. The original chrome bezels will be retained.




2. Install the new HDX system using the eight included screws and lock washers. Viewing from the back side, mount the Oil Pressure gauge on the left, and Water Temp on the right.




3. (Optional): If using all original indicator lights above the instrument cluster, skip to step four.


Original indicator locations may be covered with the four included block-off lenses. To install the block-offs; remove any unwanted original indicator bezels and lenses. Drop the new block-off lens into the bezel and secure with RTV silicone. Allow at least two hours to dry before re-installing the indicator bezels into the dash.

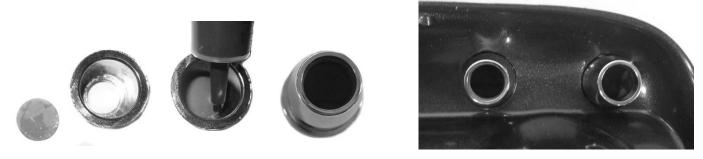

4. Connect the provided interconnect harness to the back of the HDX system.

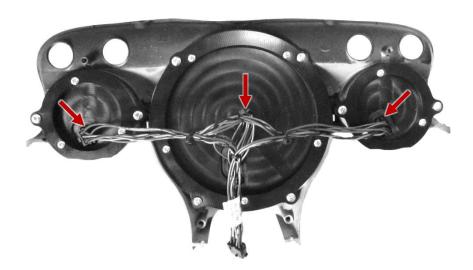

5. Connect the provided main harness to the interconnect harness. The buzzer (optional, for audio feedback) may also be connected to the back of the HDX system. Carefully route the other ends of these harnesses to the control box and buzzer mounting locations respectively.

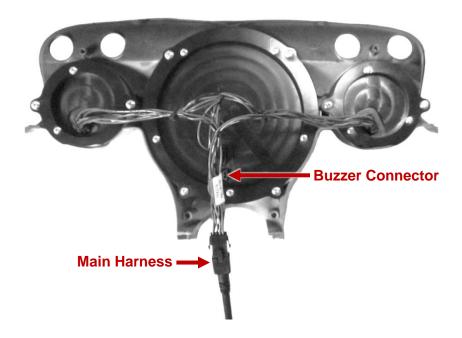

6. Re-install the cluster into the vehicle using the retained factory hardware. Refer to the main HDX manual for wiring instructions to complete the installation.



▲ WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov



4510 W. 61st St. North Sioux Falls, SD 57107

www.dakotadigital.com dakotasupport@dakotadigital.com Phone (605) 332-6513 Fax (605) 339-4106

© Copyright 2022 - Dakota Digital