



VHX-65F-PU

Dakota Digital VHX Instrument Installation For 1965-'66 Ford Custom Cab Pickups

Your new VHX-65F-PU kit includes:




36" CAT5 Cable

Installation


1. Remove the stock gauge cluster from the dash and retain the factory hardware for reassembly.




Remove the housing from bezel by removing the four screws on the bottom and the three on top. Retain this hardware for reassembly. The bezel and related mounting screws will be the only items reused.

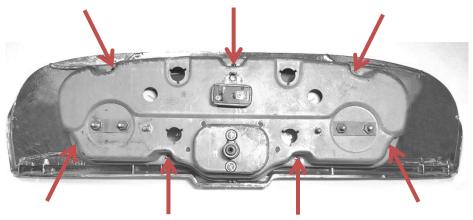

4. Carefully place the VHX system into the factory bezel and fasten using the retained original hardware. Make sure the aluminum spacer sits flush against the edge of the bezel.

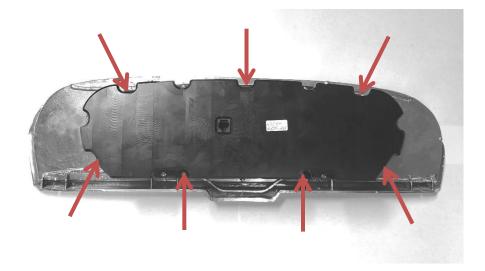

5. Attach the provided CAT5 cable to the back of the VHX system and carefully route the open end to the control box mounting location before reassembly of the dash.

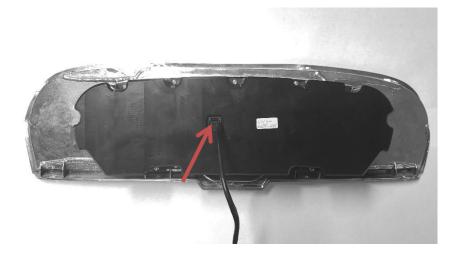

6. Re-install the gauge cluster to the dash using the factory hardware and refer to the main manual for wiring instructions to complete the VHX installation.



WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <u>www.P65Warnings.ca.gov</u>



4510 W. 61st St. North Sioux Falls, SD 57107 www.dakotadigital.com dakotasupport@dakotadigital.com Phone (605) 332-6513 Fax (605) 339-4106

 $\ensuremath{\textcircled{C}}$ Copyright 2020 - Dakota Digital