



HDX-61C-IMP

Dakota Digital HDX Instrument Installation
For 1961-'62 Chevy Impala

Your new HDX-61C-IMP kit includes:

HDX Display



Universal Sender
Pack

Buzzer

Installation Manuals



(6) Thumb Nuts



Main Harness



Control Box




(2) 1/4-20 Nuts




(3) U-Brackets

Installation


1. Remove the stock gauges from the dash. The thin bezel around the main gauge will remain in place.

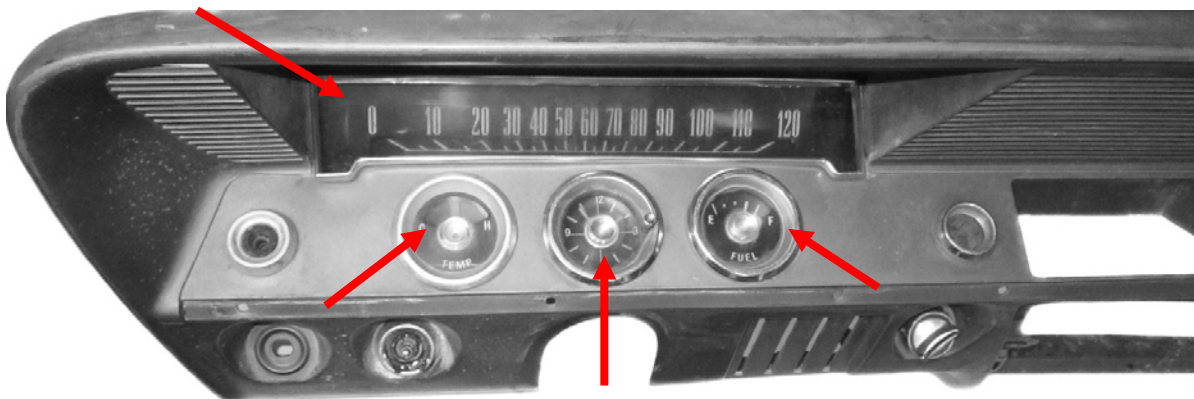


2. Insert the three auxiliary gauges from the front of the dash; from left to right: Temp, Tach, and Fuel. Use the two longer brackets for the Temp and Fuel; the Tach uses the shorter bracket. Use the supplied thumb nuts to secure the gauge to the dash while making sure each gauge is properly orientated.

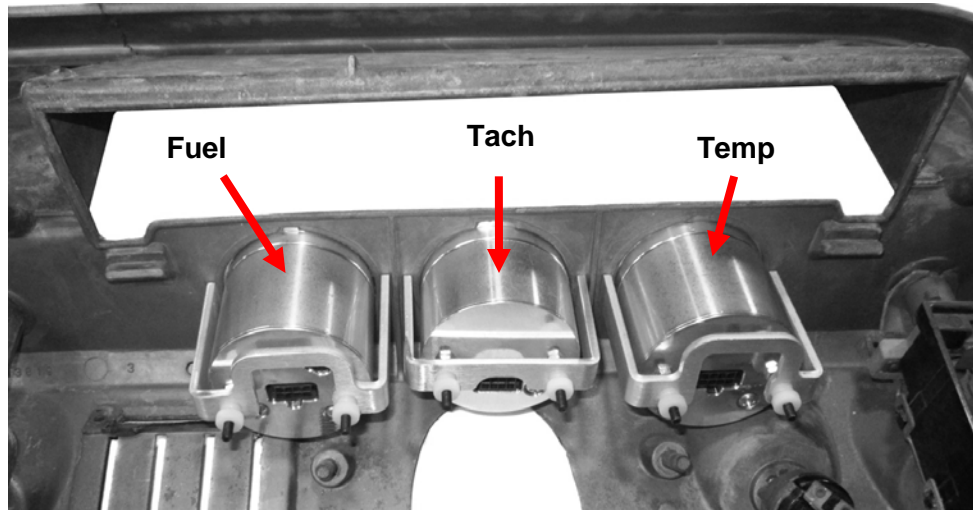


3. Place the main gauge over the factory studs and use the provided two ¼-20 nuts to secure the gauge to the dash bezel.

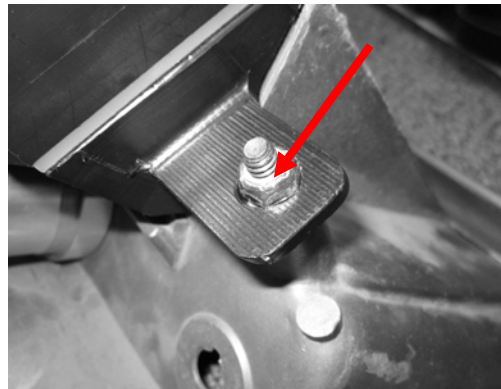

4. Make the three (3) interconnect harness connections to the auxiliary gauges with their respective length ends.

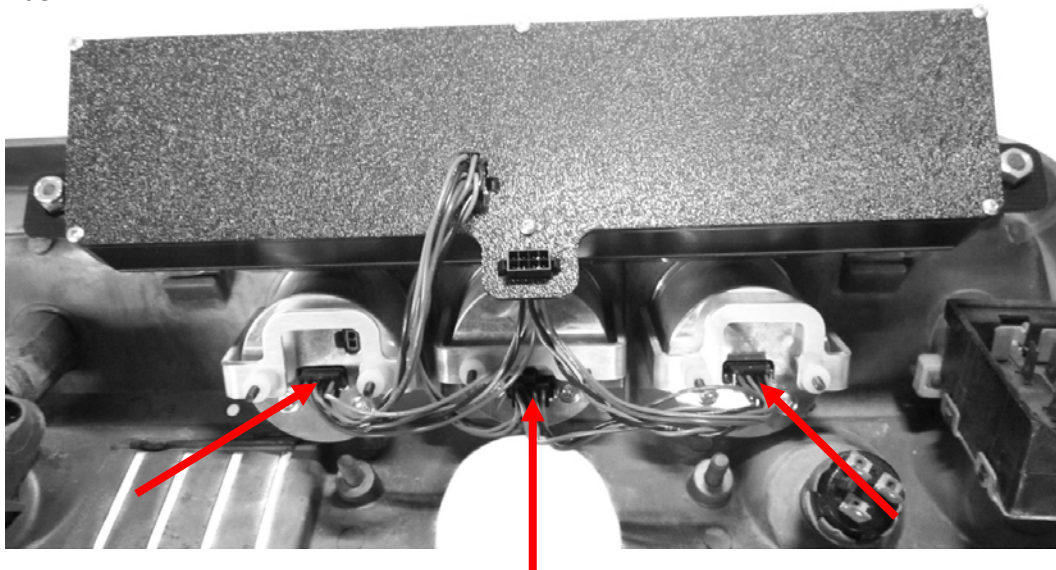

5. Connect the provided harness and the buzzer (optional for audio feedback) to the back of the HDX system.

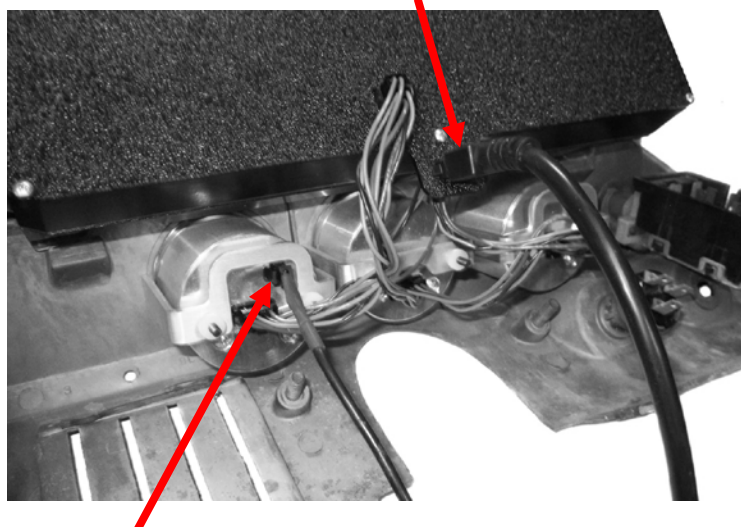

Buzzer Connector

6. Refer to the main manual for wiring instructions to complete the HDX installation.



⚠ WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov



4510 W. 61st St. North
Sioux Falls, SD 57107
www.dakotadigital.com

dakotasupport@dakotadigital.com

Phone (605) 332-6513
Fax (605) 339-4106

Copyright 2011 - Dakota Digital, Inc.