



HDX-64C-PU

Dakota Digital HDX Instrument Installation
For 1964-'66 Chevy Pickups

Your new HDX-64C-PU kit includes:

HDX Display



**Universal Sender
Pack**

Buzzer

Installation Manuals

7x Screws




Main Harness

Control Box

Installation

1. Remove the stock gauge cluster from the dash.

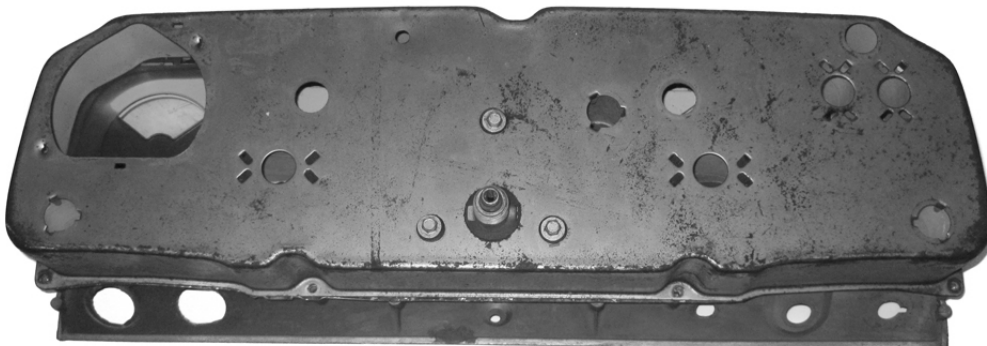


2. Remove the stock gauges, separator plate, and lens from the bezel. The only item to be reused is the original front bezel; the other pieces can be set aside. Now is a good time to clean the bezel and remove any dirt or old lens gasket material.




3. Secure the HDX system to the bezel with the seven supplied screws.



4. Connect the provided harness and the buzzer (optional for audio feedback) to the back of the HDX system.

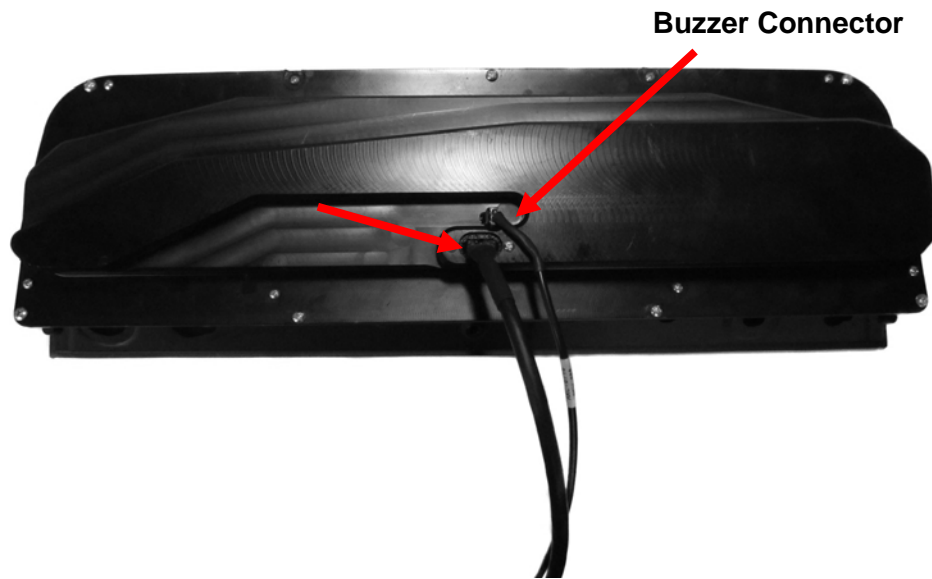

5. Re-install the cluster into the truck and refer to the main manual for wiring instructions to complete the HDX installation.

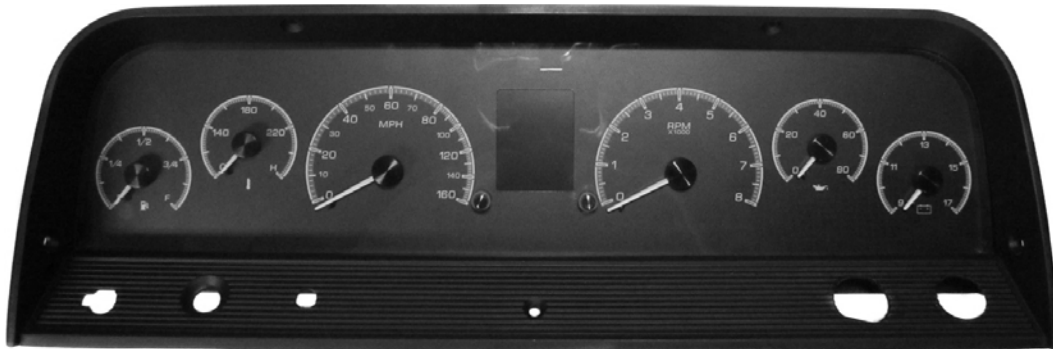

4510 W. 61st St. N., Sioux Falls SD 57107
Phone: (605) 332-6513 Fax: (605) 339-4106
www.dakotadigital.com
dakotasupport@dakotadigital.com