

HDX-71C-CAP

Dakota Digital HDX Instrument Installation
For 1971-'76 Chevrolet Caprice/Impala

Your new HDX-71C-CAP kit includes:

HDX Display



Universal Sender Pack Buzzer



Installation Manuals



(3) Black 1.5" Screws



Main Harness

Control Box




Installation



1. Remove the lower gauge cover from the dash. Retain the factory hardware for reassembly.




2. Remove the gear selector and retain the hardware. Also remove the clear lens housing.

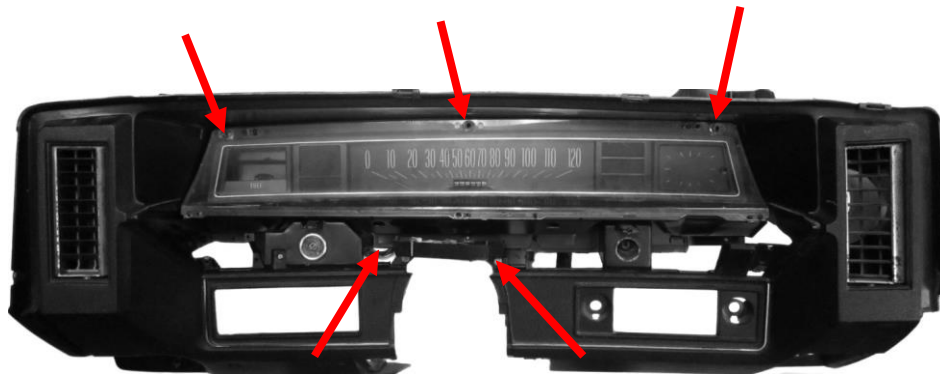

3. Remove the stock gauges, bulbs, and speedometer cable clamp. Set these items aside; they will not be reused.

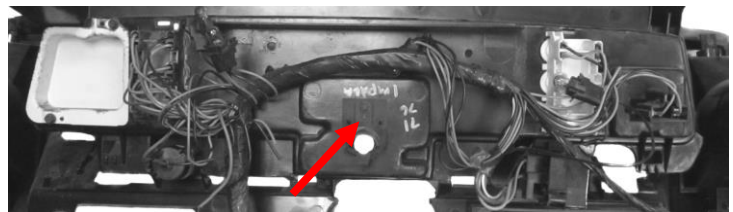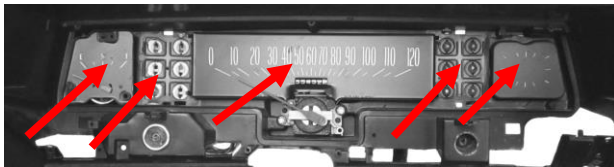

4. There are a few areas that need to be trimmed flush to the housing to allow the HDX system to mount properly.

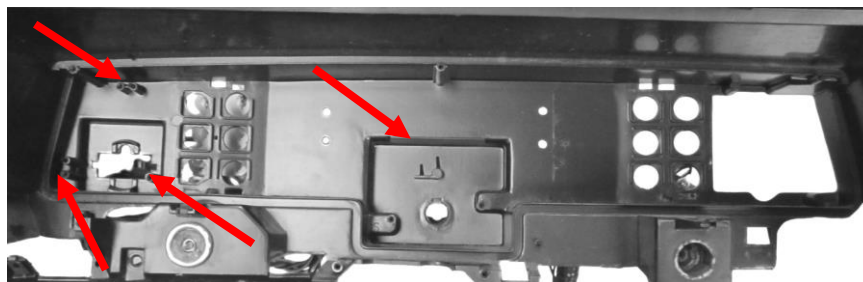


5. Route the provided Main Harness and the Buzzer (optional for audio feedback) through the back of the stock dash and connect to the back of the HDX system.

Buzzer Connector



6. Mount the HDX system to the stock housing using the three (3) supplied black screws in the stock mounting locations and re-install the gear selector using the stock hardware.

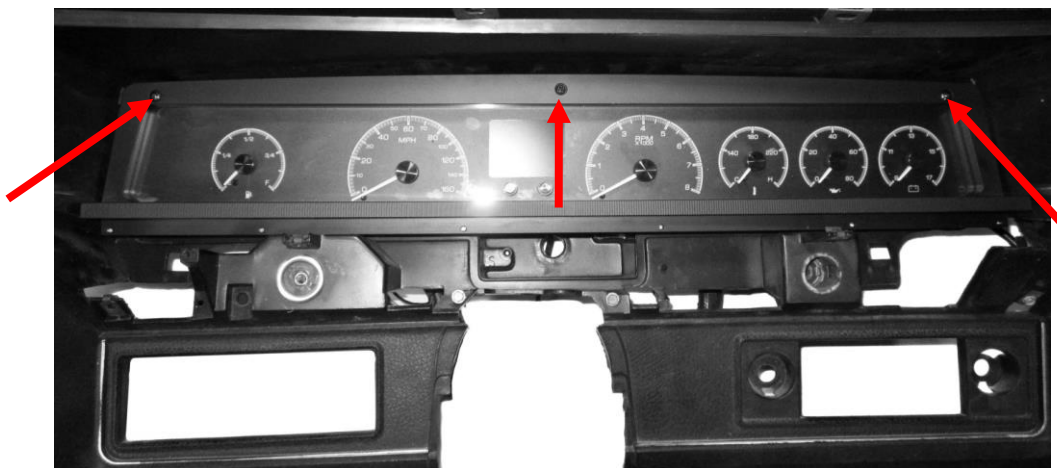

7. Re-install the lower gauge cover using the factory hardware and refer to the main manual for wiring instructions to complete the HDX installation.



⚠ WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov



4510 W. 61st St. North
Sioux Falls, SD 57107
www.dakotadigital.com
dakotasupport@dakotadigital.com

Phone (605) 332-6513
Fax (605) 339-4106

Copyright 2011 - Dakota Digital, Inc.