

HDX-94C-CAP Dakota Digital HDX Instrument Installation For 1994-'96 Chevrolet Caprice/Impala

Your new HDX-94C-CAP kit includes:




Installation

- Harness
- 1. Remove the stock gauge cluster from the dash. Retain all factory hardware for reassembly.



 Route the provided 36" Main Harness and Buzzer through an existing opening in rear of the dash. Attach the harness and buzzer (optional for audio feedback) to the back of the HDX system. Be careful to not pinch the cables.

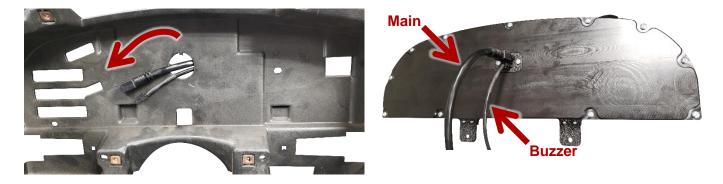

3. Place the HDX system into the dash and secure using hardware from disassembly.



4. Carefully route the open end of the main harness to the control box mounting location. Refer to the main manual for wiring instructions to complete the HDX installation.



WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov



4510 W. 61st St. North Sioux Falls, SD 57107 www.dakotadigital.com dakotasupport@dakotadigital.com Phone (605) 332-6513 Fax (605) 339-4106

© Copyright 2023 - Dakota Digital

Manual # 650827