



# VHX-1014

## Dakota Digital VHX Instrument Installation Dual Round Universal System

Your new VHX-1014 kit includes:

**VHX Displays**



**Dimensions:**

**Universal Sensor Pack**



**6X Mounting Brackets**



**6X Thumb Nuts**



**Switch Assembly**


**36" CAT5 Cable**




**24" CAT5 Cable**

### Installation


1. First, you will need to make two openings for the system in your dash or desired mounting location. You will need a 5" diameter hole for the VHX gauge to fit through and sit flush with the surface of the dash. You will also need at least 2.5" of depth behind the gauge openings for adequate clearance.

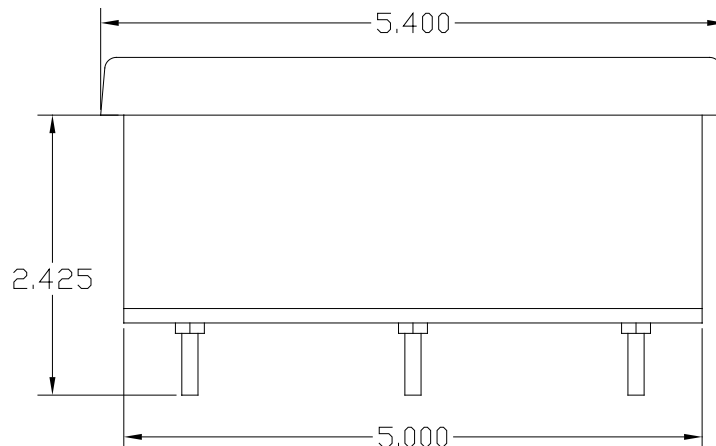


5" diameter hole

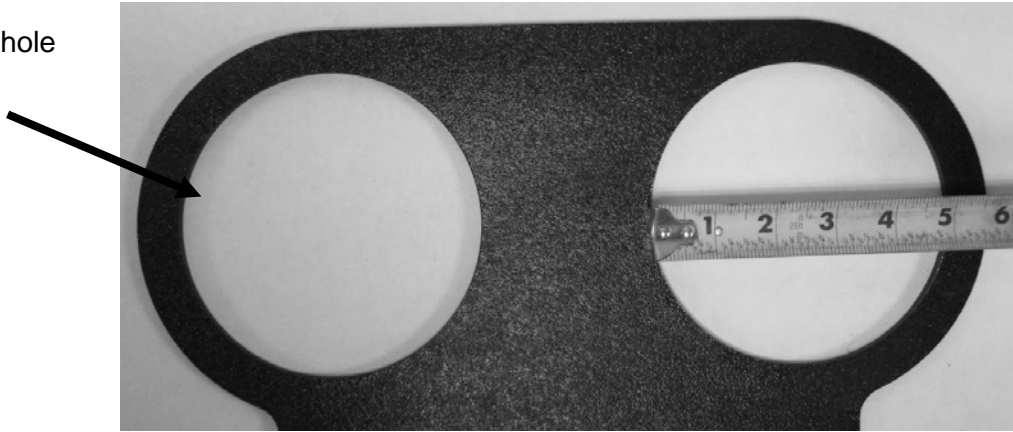


2. Remove the protective tape and insert one of the gauges into a hole and secure using the supplied clamps and thumb nuts. Make sure you align/straighten the system with the dash before you tighten the thumb nuts all the way.

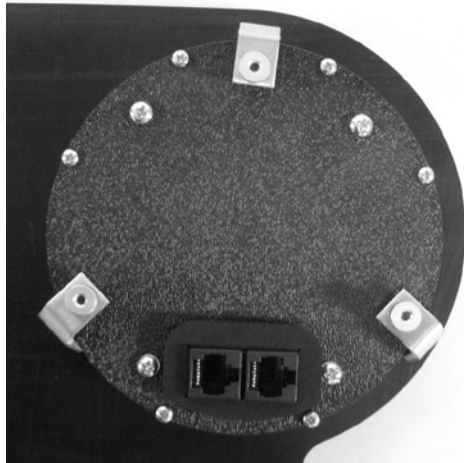

3. Secure the second gauge following the steps above.

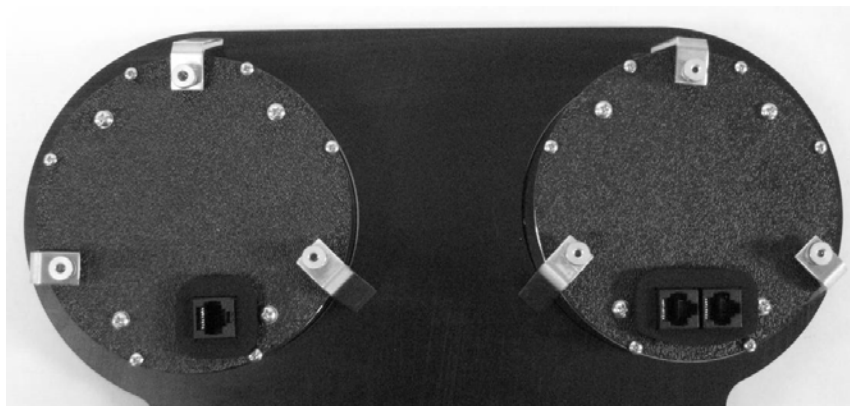

4. Connect the two gauges together using the supplied CAT5 cable.

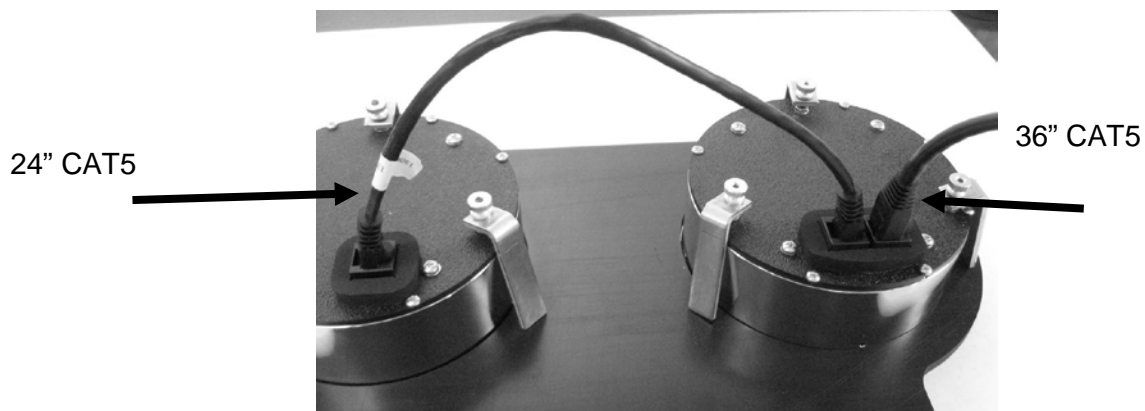

5. System installation is complete. Re-install the dash if you removed it for making holes and refer to the main manual for wiring instructions to complete the VHX installation.



**⚠ WARNING:** This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)



4510 W. 61st St. North  
Sioux Falls, SD 57107  
[www.dakotadigital.com](http://www.dakotadigital.com)

[dakotasupport@dakotadigital.com](mailto:dakotasupport@dakotadigital.com) Copyright 2011 - Dakota Digital, Inc.

Phone (605) 332-6513  
Fax (605) 339-4106