



WWW.DAKOTADIGITAL.COM

## VHX-1018

### Dakota Digital Universal VHX Instrument Installation

Your new VHX-1018 kit includes:

**VHX Display**



**Universal Sender Pack**




**Switch Assembly**

**Installation Manuals  
and Cutout Template**



**CAT5 Cable**



**(4x) L-Brackets  
and Thumb Nuts**

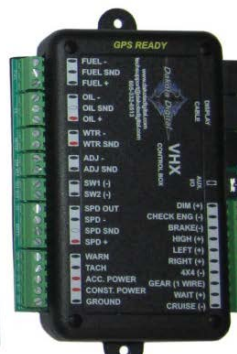

**Control Box**


## Installation

1. Use the provided template to mark out the opening needed to fit the VHX display. Ensure there is adequate clearance behind the desired mounting location. The display unit needs approximately two inches of depth behind the dash.

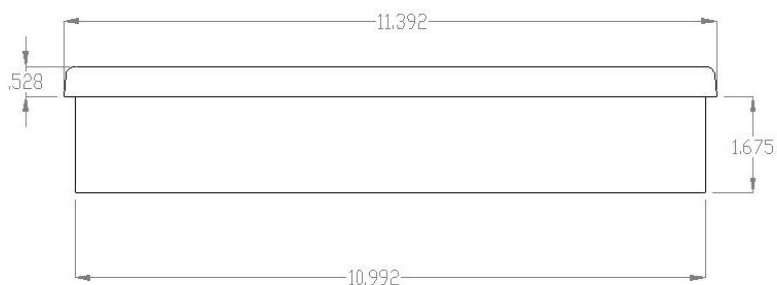


Manual # 650419A

2. With the appropriate opening cut, place the VHX display into the dash and attach the four (4) L-brackets to the back of the display using the provided thumb nuts.

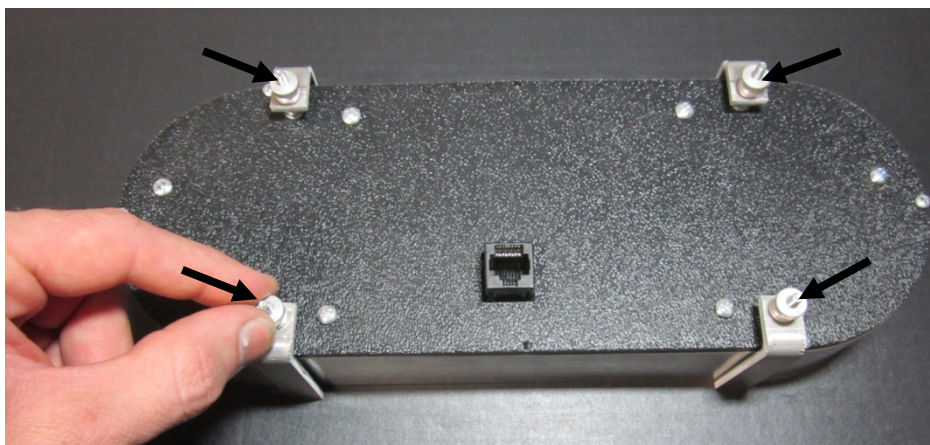

3. Attach the provided CAT5 Cable to the back of the VHX display and carefully route the other end to the control box mounting location. Remove the protective tape from the lens and refer to the main manual for wiring instructions.

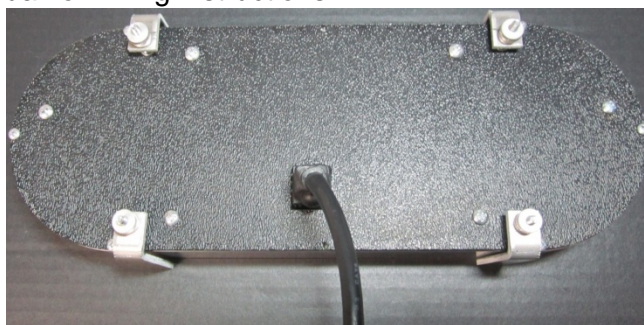

**⚠ WARNING:** This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)



4510 W. 61st St. North  
Sioux Falls, SD 57107  
[www.dakotadigital.com](http://www.dakotadigital.com)  
[dakotasupport@dakotadigital.com](mailto:dakotasupport@dakotadigital.com)

Phone (605) 332-6513  
Fax (605) 339-4106

Copyright 2011 - Dakota Digital, Inc.