



VHX-53F-PU

Dakota Digital VHX Instrument Installation
For 53-55 Ford Pickup


Your new VHX-53F-PU kit includes:



Installation

1. Remove the stock gauges from the dash by removing the four screws securing the gauges to the dash.

2. The VHX system should align tightly with the dash.

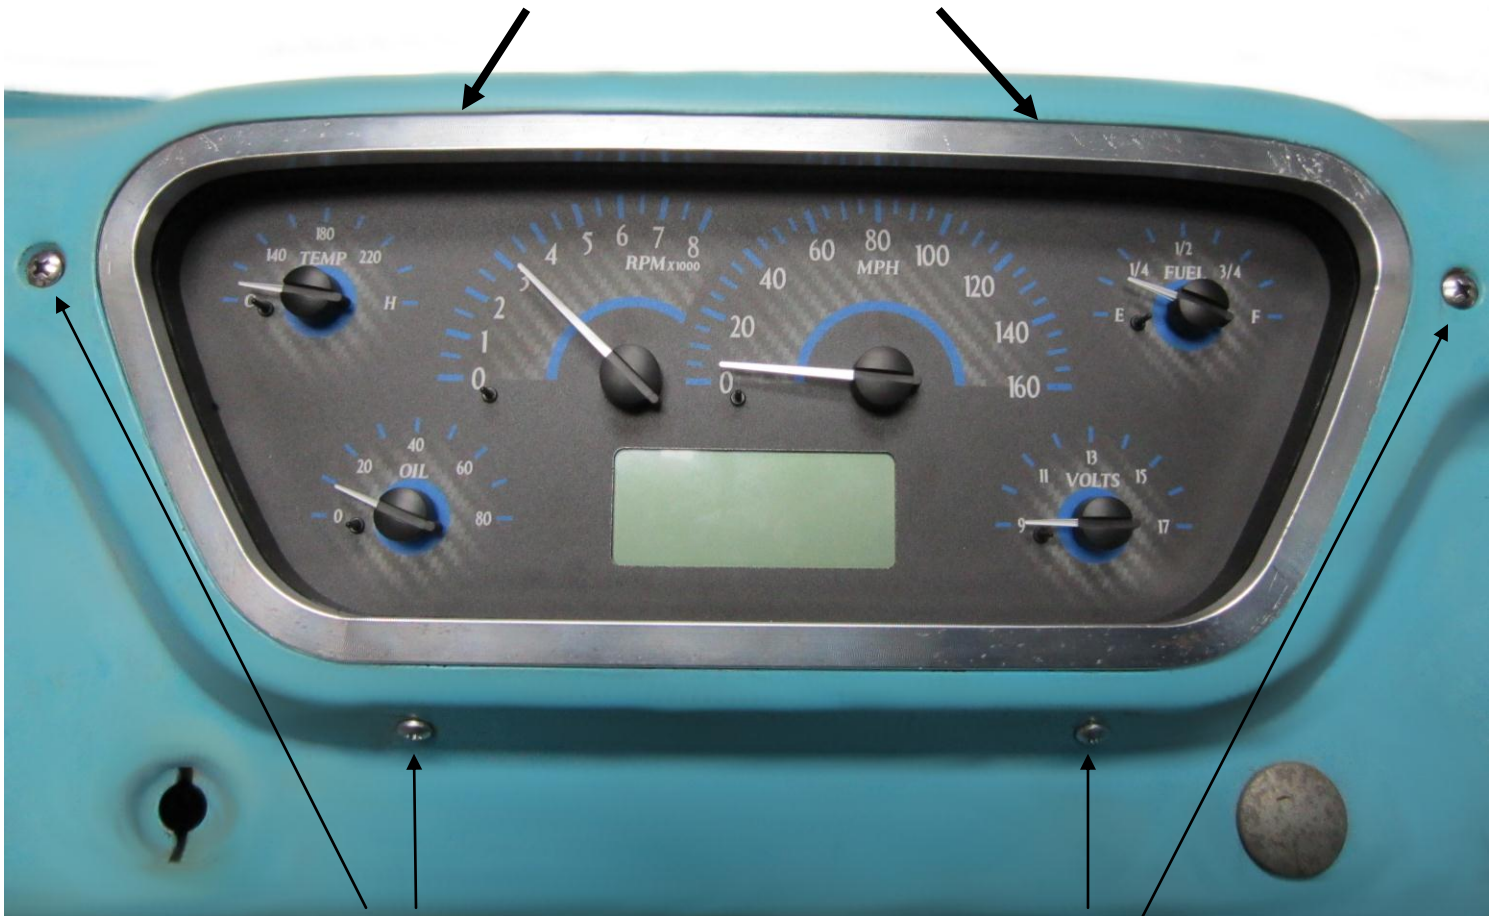

3. Secure the VHX system to the system with the four 10-18x.5" screws provided. The two counter sunk screw are for the upper two locations and the two pan heads are for the lower two locations. Take care when tightening the mounting screws to avoid stripping the threads.



4. Connect the CAT5 cable to the system. As the assembled cluster is installed into the dash, take care when routing this cable to the control box.

5. Refer to the main manual for wiring instructions to complete the VHX installation.



4510 W. 61st St. N., Sioux Falls SD 57107
Phone: (605) 332-6513 Fax: (605) 339-4106
www.dakotadigital.com
dakotasupport@dakotadigital.com