



VHX-63F-GAL

Dakota Digital VHX Instrument Installation
For 1963-'64 Ford Galaxie

Your new VHX-63F-GAL kit includes:

VHX Display



Universal Sender Pack




CAT5 Cable

4X 6-20 X 3/8"



6X 6-20 X 5/8"

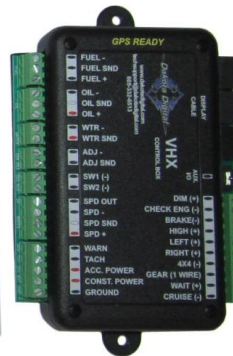

Control Box




Ford Speed Adapter

Installation

1. Remove the stock gauge cluster from the dash. Retain all hardware for reassembly.




2. Separate the gauge housings from the bezel so you are left with a bare bezel.

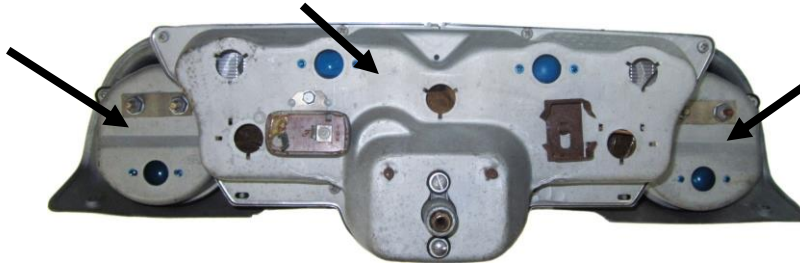


3. With the bare bezel lying face down, fit the VHX system into place and secure it to the bezel using the four (4) 3/8" screws for the smaller gauges and the six (6) 5/8" screws for the main gauge.

Bare and Clean Bezel

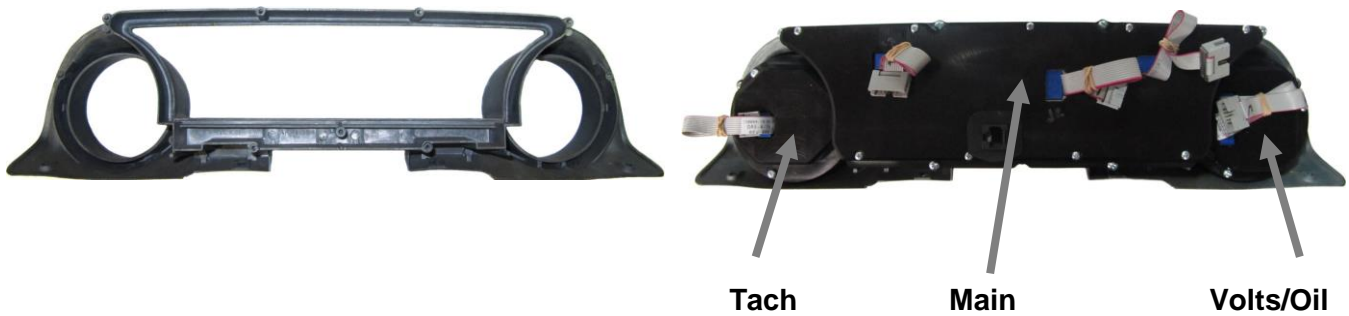

4. Connect the labeled ribbon cables for the auxiliary gauges to their respective ends.

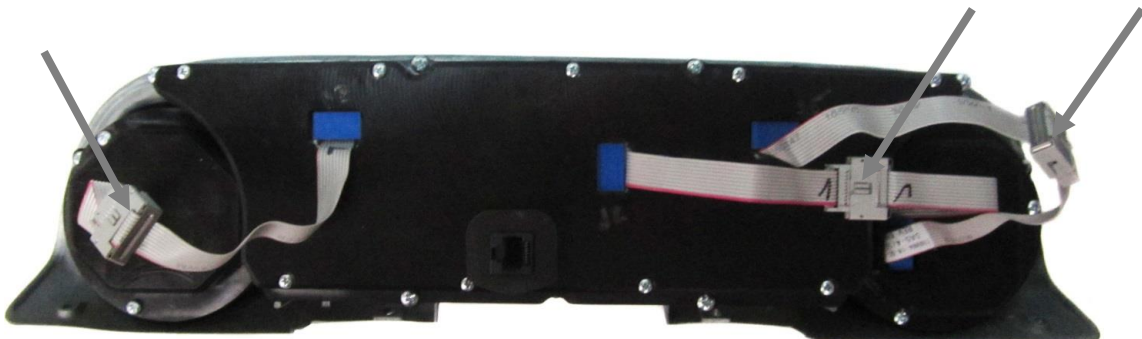

5. Connect the provided CAT5 cable to the rear of the VHX system.



6. The gauge panel is now ready to re-install into the vehicle using stock hardware; take care when routing the CAT5 cable to the control box mounting location. Refer to the main manual to complete the VHX installation.



⚠WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov



4510 W. 61st St. North
Sioux Falls, SD 57107
www.dakotadigital.com
dakotasupport@dakotadigital.com

Phone (605) 332-6513
Fax (605) 339-4106

Copyright 2011 - Dakota Digital, Inc.