

VHX-64C-PU


Dakota Digital VHX Instrument Installation
For '64-66 Chevy Pickup Systems

Your new VHX-64C-PU kit should include:




Installation



1. Remove the stock gauges from the dash. Remove the seven screws holding the gauges to the bezel on the back of the system.

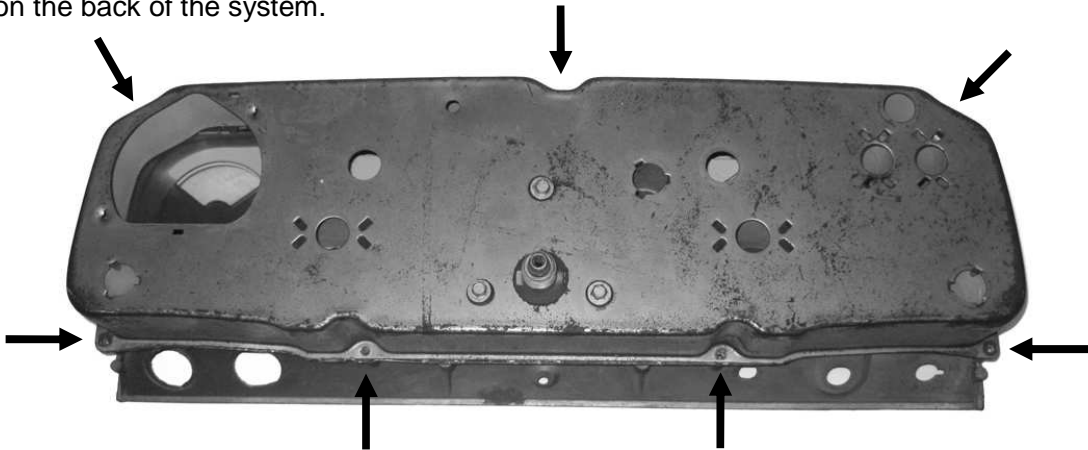

2. Remove the stock gauges, separator plate, and lens from the bezel. The only item to be reused is the original front bezel; the other pieces can be discarded. Now is a good time to clean the bezel and remove any dirt or old lens gasket material.

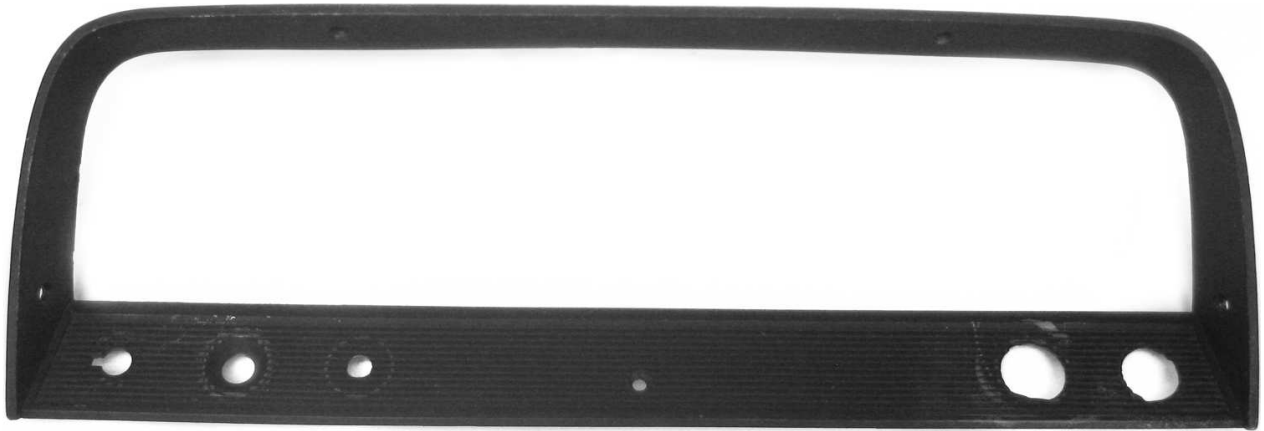


4. Cut the supplied foam tape into six pieces, so each is about two inches long. Stick the foam strips on the angled part of the inside edge of the bezel. The lens will compress against any foam above the edge, which helps prevent lens rattles.

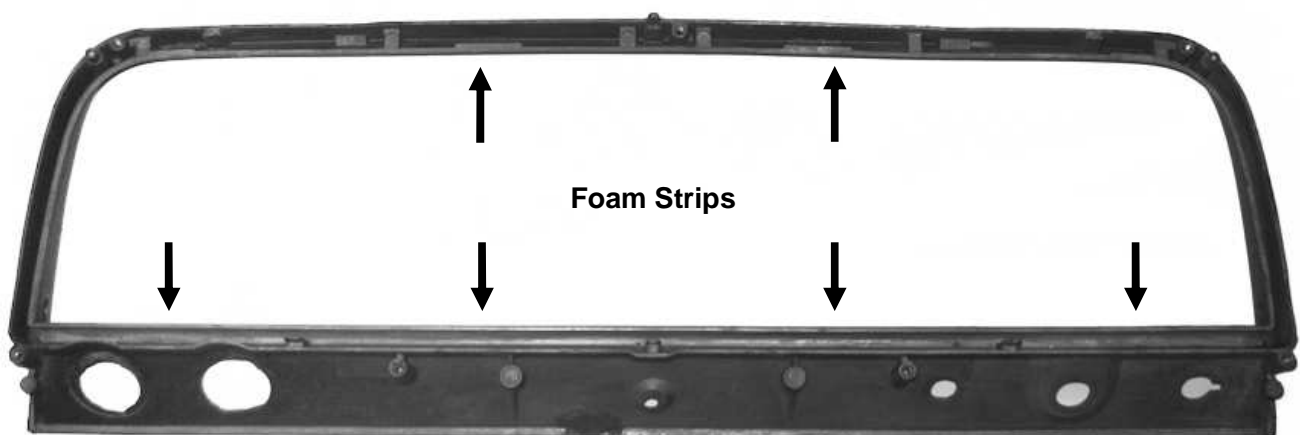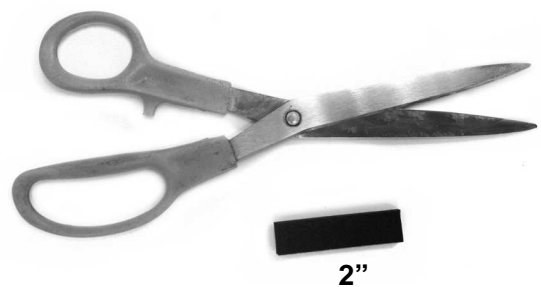





5a. Remove the protective tape from the clear lens and install the VHX system into the bezel. Watch carefully as you insert the system so you don't scratch or damage the lens.

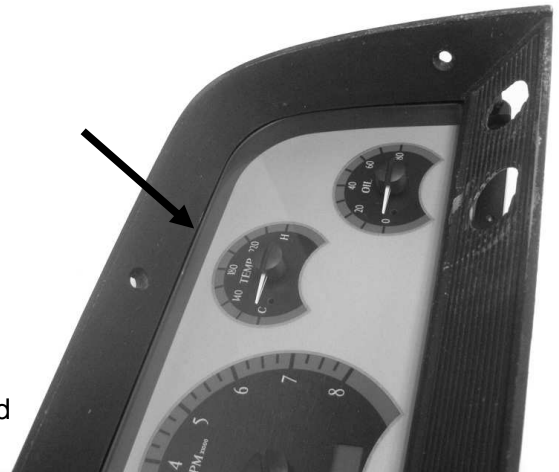

5b. The VHX system should align tightly and the lens should fit flush with the bezel.


6. Secure the VHX system to the bezel with the seven 6-20 x 1.00" screws and lock washers provided.

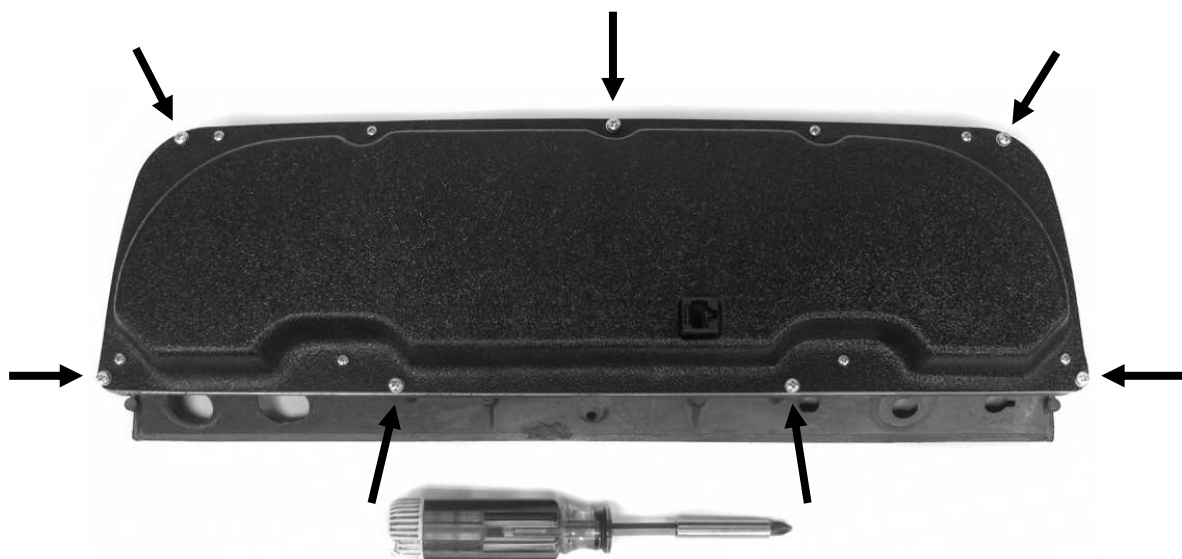

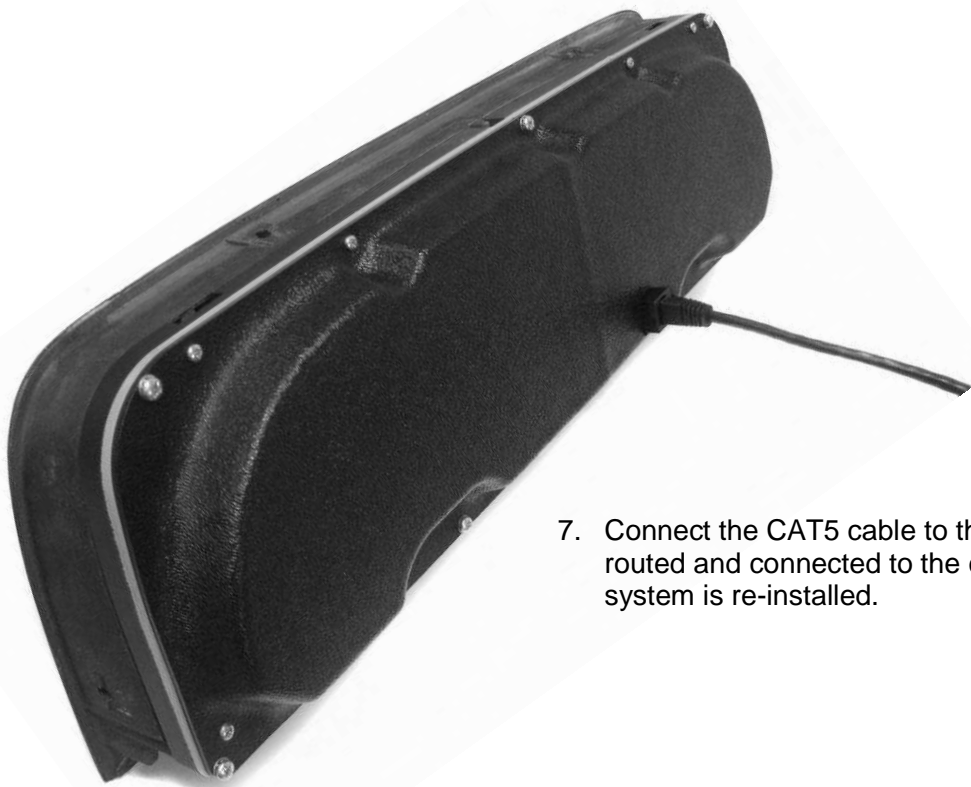

7. Connect the CAT5 cable to the system so it can be routed and connected to the control box as the system is re-installed.

8. Re-install the cluster into the truck and refer to the main manual for wiring instructions to complete the VHX installation.

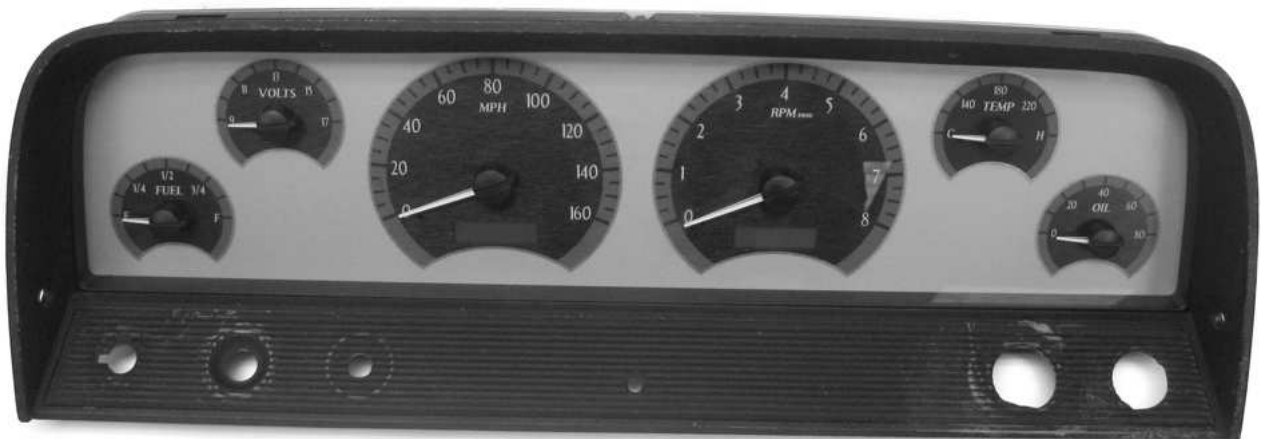

4510 W. 61st St. N., Sioux Falls SD 57107
Phone: (605) 332-6513 Fax: (605) 339-4106
www.dakotadigital.com
dakotasupport@dakotadigital.com

Manual # 650359