

VHX-65F-MUS

Dakota Digital VHX Instrument Installation For 1965 Ford Mustang - GT and Pony style interiors only 1966 Ford Mustang - All interiors

Your new VHX-65F-MUS kit includes:

VHX Display











Switch Assembly



CAT5 Cable






Ford Speed Adapter



Installation

1. Remove the stock instrument system from the dash. Remove the eight (8) screws holding the gauges to the bezel on the back of the system.

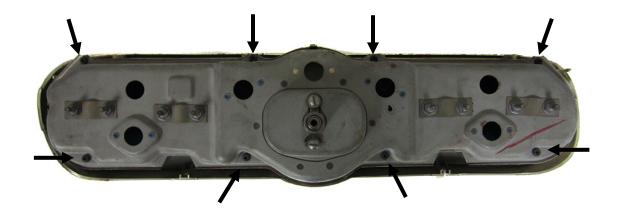

2. Remove the stock gauges and lens from the bezel. The only items to be reused are the original front bezel and four (4) of the stock mounting screws; the other pieces can be discarded. Now is a good time to clean the bezel or upgrade to a new one.




3a. Remove the protective tape from the clear lens and install the VHX system into the bezel. Watch carefully as you insert the system so you don't scratch or damage the lens.




3b. Align the four (4) holes on the bottom of the VHX display with the four (4) mounting bosses on the bezel. Once aligned, the VHX display should slip easily into the bezel until fully seated, with no gap between the lens and bezel.



4. Secure the VHX system to the bezel using the four (4) provided 6-20x1" screws in the four bottom mounting holes. Four (4) of the stock mounting screws can be re-used for the rest of the mounting holes.

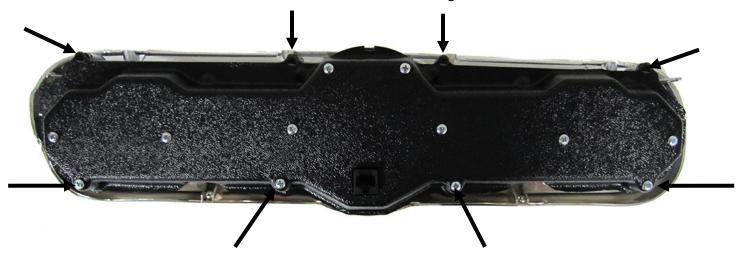

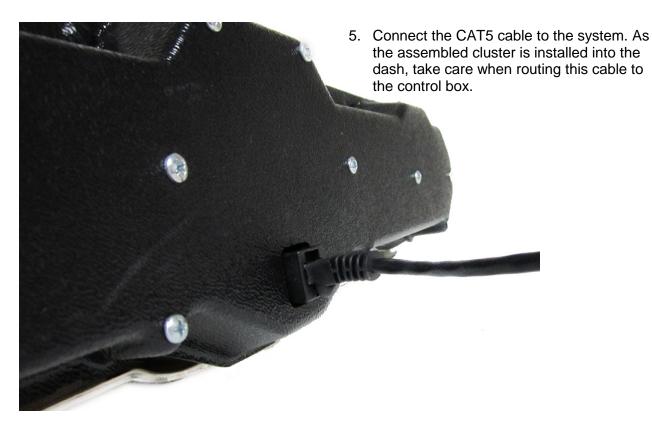

6. Re-install the cluster into the dash and refer to the main manual for wiring instructions to complete the VHX installation.



AWARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov



4510 W. 61st St. North Sioux Falls, SD 57107 www.dakotadigital.com

Phone (605) 332-6513 Fax (605) 339-4106

dakotasupport@dakotadigital.com Copyright 2011 - Dakota Digital, Inc.