



WWW.DAKOTADIGITAL.COM

VHX-68C-IMP

Dakota Digital VHX Instrument Installation
For 1968 Chevrolet Impala and Caprice

Your new VHX-68C-IMP kit includes:

VHX Display



Universal Sender Pack



Installation Manuals



Indicator Harness



(2) 5/8" Screws
(6) 1.25" Screws



(4) Warning Indicator
Black Outs




Gear Indicator
Black Out



36" CAT5 Cables

Control Box



Installation

1. First, remove the stock gauge cluster from the dash. Retain the factory hardware for reassembly.




- 2a. Remove the stock gauges from the bezel; you can also remove the factory clear lens on the front of the bezel or it can be left in place if desired.



- 2b. The stock gear indicator and BRAKE warning can be used or they can be blacked out by peeling the protective paper off and silconing the blackout plates directly behind the openings. To use the BRAKE indicator; the stock light guide must be used.

3. Mount the VHX system to the stock bezel using the eight (8) supplied screws.

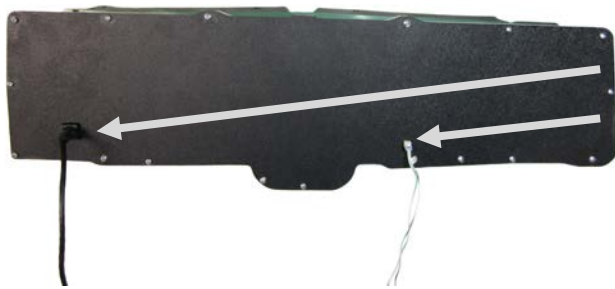

4. Attach the provided CAT5 cable to the back of the VHX system and carefully route the open end to the control box mounting location. If using the BRAKE indicator; connect the provided harness and make the following connections:
WHITE\GREEN wire to BRAKE CIRCUIT
WHITE\BLACK wire to CHASSIS GROUND

5. Re-install the gauge bezel using the factory hardware and refer to the main manual for wiring instructions to complete the VHX installation.



4510 W. 61st St. N., Sioux Falls SD 57107
Phone: (605) 332-6513 Fax: (605) 339-4106
www.dakotadigital.com
dakotasupport@dakotadigital.com