



VHX-69P-GTO

Dakota Digital VHX Instrument Installation
For 1969 GTO's

Your new VHX-69P-GTO kit includes:



VHX Display




Universal Sender Pack



36" CAT5 Cable



12" CAT5 Cable

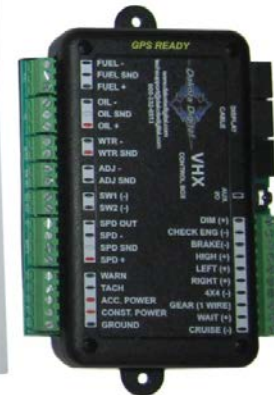


Control Box

Installation

1. Disconnect and remove the stock gauges from the dash and save all hardware for reassembly.



2. With the stock gauges removed, the dash is now ready to accept the VHX gauges using stock hardware in the seven (7) original mounting points.

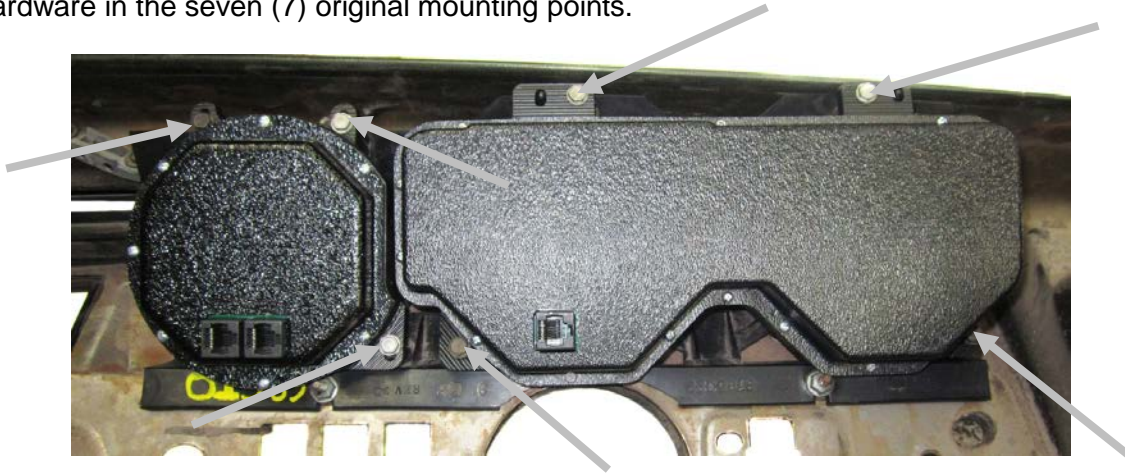

3. Connect one end of the 12" CAT5 cable to either jack on the Tach and the other end to the Speed assembly, then connect one end of the 36" CAT5 cable to the remaining open jack on the Tach. Use caution when routing the other end of this cable to the control box mounting location.

4. Refer to the main manual for wiring instructions to complete the VHX installation.



4510 W. 61st St. N., Sioux Falls SD 57107
Phone: (605) 332-6513 Fax: (605) 339-4106
www.dakotadigital.com
dakotasupport@dakotadigital.com