



VHX-70C-CAM

Dakota Digital VHX Instrument Installation
For 1970-'81 Chevy Camaro


Your new VHX-70C-CAM kit includes:

Installation Manuals

Control Box

Universal Sender
Pack

CAT5 Cable
(Connects Display
to Control Box)

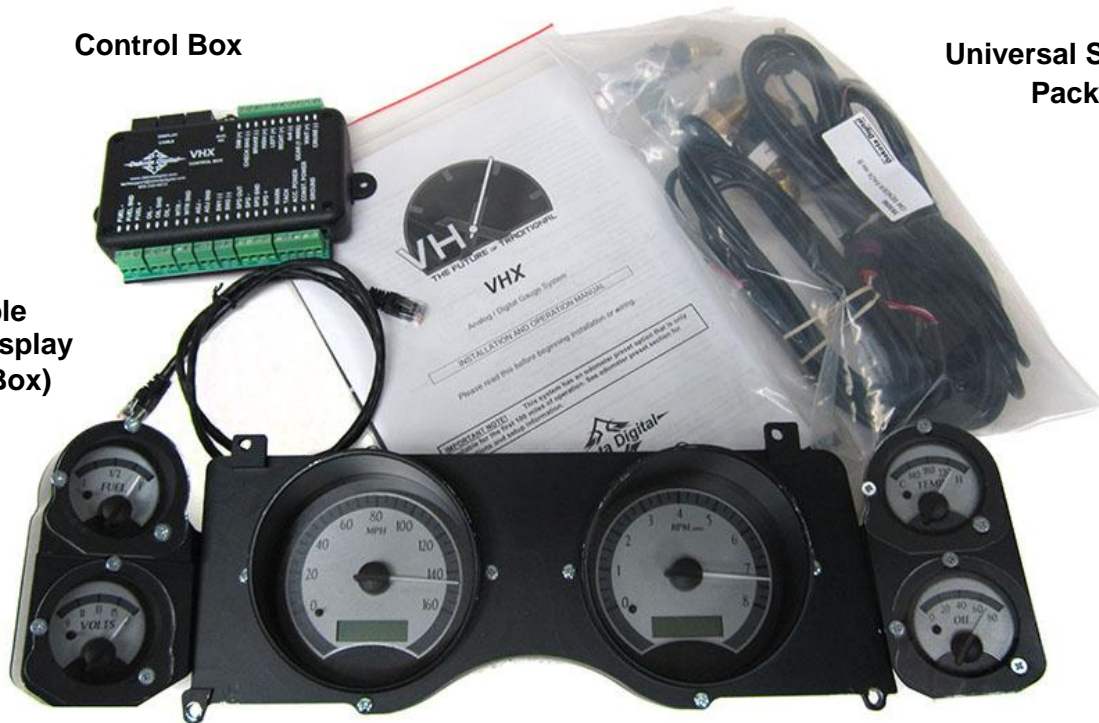

VHX Display

Installation

1. First remove the four screws holding the bezel to the dash. These four screws will be re-used for the VHX installation. If you wish to re-use the stock bezel, now is a good time to clean the bezel.



2. Remove the four screws holding the gauges into the dash. These screws will be re-used for the VHX gauge installation.



3. Connect the CAT5 cable to the system. As the assembled cluster is installed into the dash, take care when routing this cable to the control box.



4. Secure the VHX system to the dash with the original four screws.



- 5a. Remove the protective tape from the clear lens and align the bezel with the gauges. Watch carefully as you align the bezel so you don't scratch or damage the lens.



- 5b. The VHX system should align tightly and the lens should sit flush with the bezel.

6. Secure the bezel to the dash with the four original screws. Refer to the main manual for wiring instructions to complete the VHX installation.



4510 W. 61st St. N., Sioux Falls SD 57107
Phone: (605) 332-6513 Fax: (605) 339-4106
www.dakotadigital.com
dakotasupport@dakotadigital.com