



VHX-70D-CLG


Dakota Digital VHX Instrument Installation
For 1970-74 Dodge Challenger, Plymouth 'Cuda with Rallye dash

Your new VHX-70D-CLG kit includes:

VHX Display



Universal Sender Pack



(3) Indicator Harnesses



36" CAT5 Cable



Control Box

Installation


1. Remove the stock plastic bezel from the dash. Retain all factory hardware for reassembly.



2. Remove the stock gauge cluster by removing the four (4) screws and retain the hardware for reassembly.

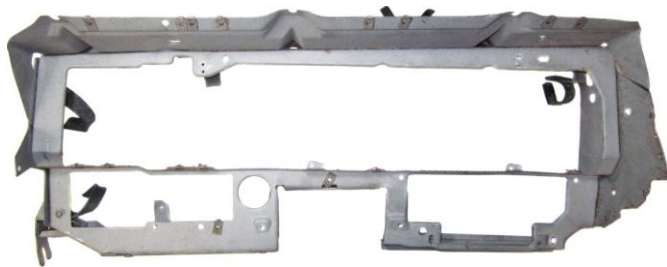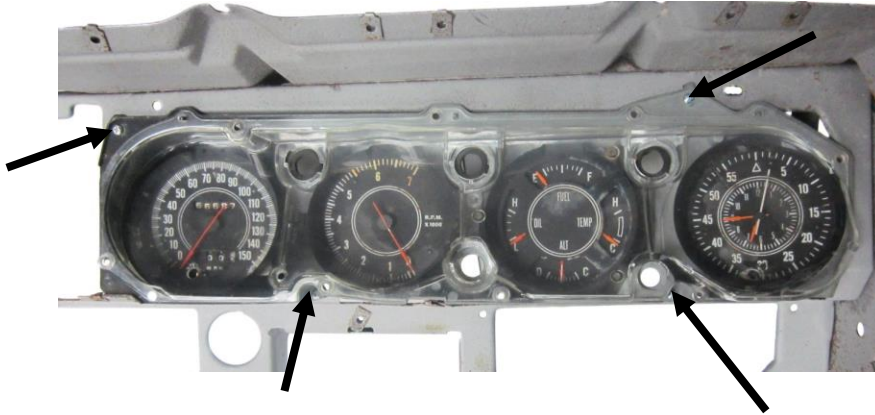

3. Mount the VHX system to the dash by reusing the four (4) screws that held the factory cluster.

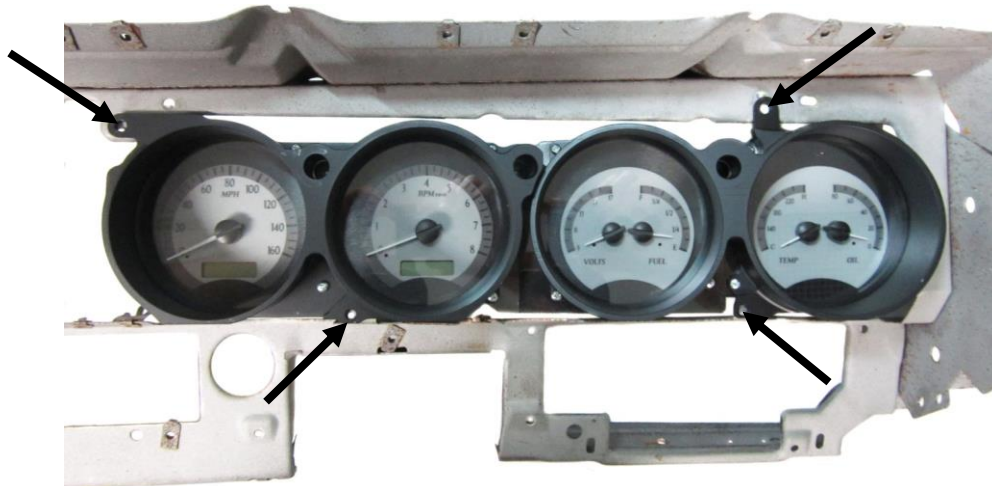


- 4A. This system comes with two options for the turn signals and brake indicator. You can have the indicators located in the faceplate of your new VHX display, and/or arrows in your vehicle's stock locations. To use the new faceplate arrows, follow the wiring instructions found in the main VHX manual.

To optionally use the stock locations, do not wire the turn signals to the VHX control box. Instead, use the two provided two-wire harnesses. The harnesses plug directly into the connectors on the back side of your new VHX system:

WHITE\GREEN wire to INDICATOR CIRCUIT

WHITE\BLACK wire to CHASSIS GROUND

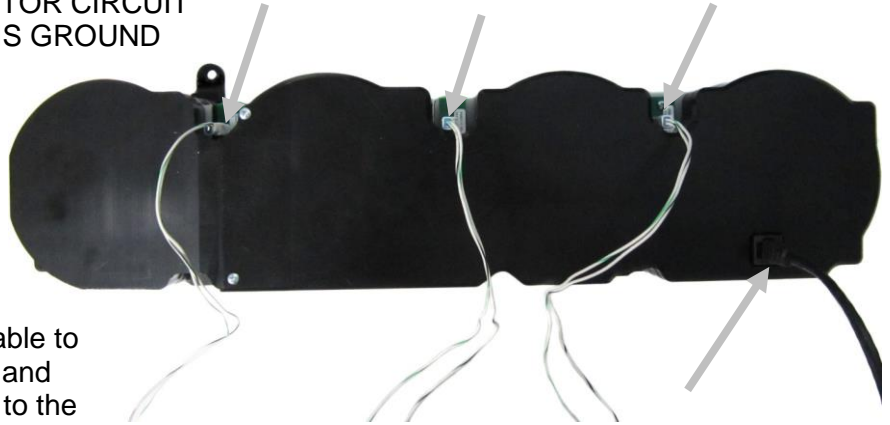

- 4B. Attach the provided CAT5 cable to the back of the VHX system and carefully route the open end to the control box mounting location.

5. Re-install the gauge bezel to the dash using the factory hardware and refer to the main manual for wiring instructions to complete the VHX installation.



⚠WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov



4510 W. 61st St. North
Sioux Falls, SD 57107
www.dakotadigital.com

dakotasupport@dakotadigital.com Copyright 2011 - Dakota Digital, Inc.

Phone (605) 332-6513
Fax (605) 339-4106