



VHX-700-CUT

Dakota Digital VHX Instrument Installation
For 1970-'72 Oldsmobile Cutlass

Your new VHX-700-CUT kit includes:

VHX Display



Universal Sender Pack




Installation Manuals



(9) 3/4" Screws



Control Box



(2) 36" CAT5 Cable
(1) 12" CAT5 Cable



Installation

1. First, remove the stock gauge bezel and gauges from the dash. Retain all factory hardware for reassembly.




Stock Bezel and Gauges Removed



2. With the stock gauges removed, you can now mount the VHX system to the instrument housing by using the nine (9) supplied $\frac{3}{4}$ " screws in the original screw holes.



3. Next, you will need to make connections with the provided CAT5 cables. Attach one end of the provided 36" CAT5 cables to both the back of the VHX system speed and the back of the quad gauge with the other ends carefully routed to the control box mounting location. One end of the 12" CAT5 cable goes to the speed and the other end to the tach.

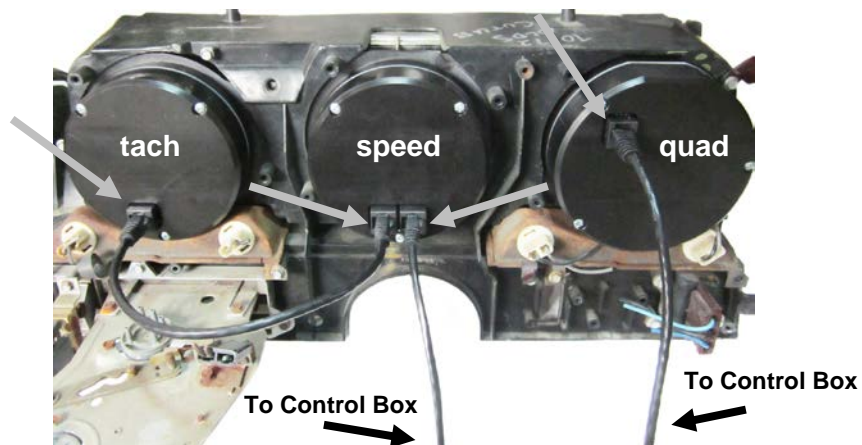

4. Re-install the gauge bezel to the dash housing using the factory hardware and refer to the main manual for wiring instructions to complete the VHX installation.



4510 W. 61st St. N., Sioux Falls SD 57107
Phone: (605) 332-6513 Fax: (605) 339-4106
www.dakotadigital.com
dakotasupport@dakotadigital.com