



# VHX-87F-MUS

Dakota Digital VHX Instrument Installation  
For 1987-'89 Ford Mustang

Your new VHX-87F-MUS kit includes:

VHX Display



Universal Sender Pack



Switch Assembly



36" CAT5 Cable



Control Box



Ford Speed Sensor Plug



Alternator Load Harness




## Installation


1. Remove the stock gauge bezel from the dash and save all hardware for reassembly.



2. Remove the stock gauge cluster by removing the four screws holding the system to the dash structure; be sure to keep these screws as they will be re-used. Now is a good time to clean the bezel and dash pads.

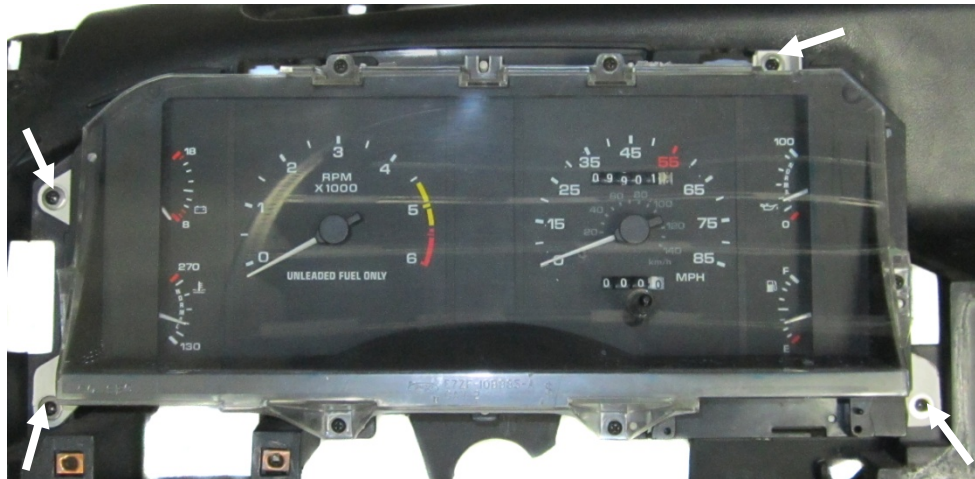

3. Connect the CAT5 cable to the back of the VHX cluster as it is installed into the dash, take care when routing the other end of this cable to the control box mounting location. Mount the VHX cluster to the dash structure using the four factory screws.

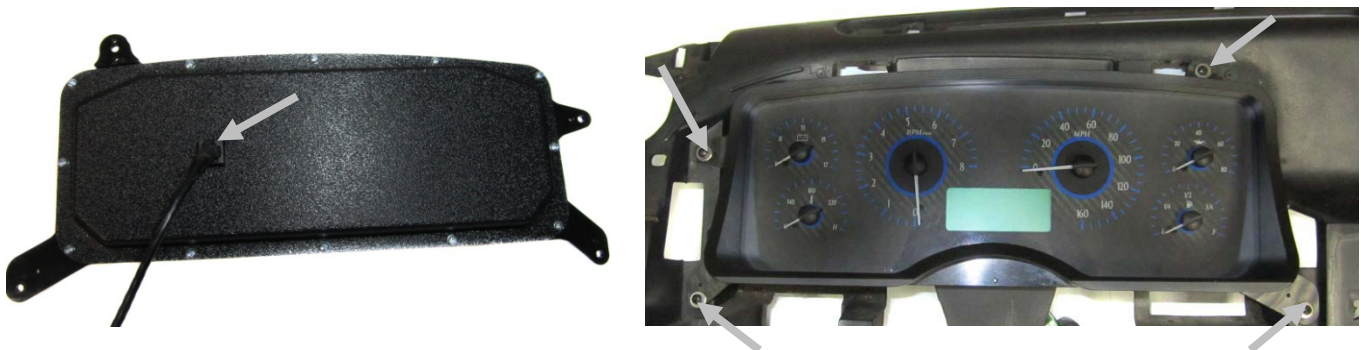

4. Refer to the main manual for wiring instructions to complete the VHX installation.



5. Stock Mustang charging systems will need an additional wiring connection at the gauge cluster connector. You will need to add a 300 to 500 ohm resistor between pin 14 (LG/R wire) and Pin 2 (R/LG wire). The provided alternator load harness can be used to achieve this.

**⚠ WARNING:** This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)



4510 W. 61st St. North  
Sioux Falls, SD 57107  
www.dakotadigital.com

dakotasupport@dakotadigital.com Copyright 2011 - Dakota Digital, Inc.

Phone (605) 332-6513  
Fax (605) 339-4106