


VLK-55C

Dakota Digital VHX Clock Installation For '55 Chevy Speaker Clocks

Your new VLK-55C kit should include:

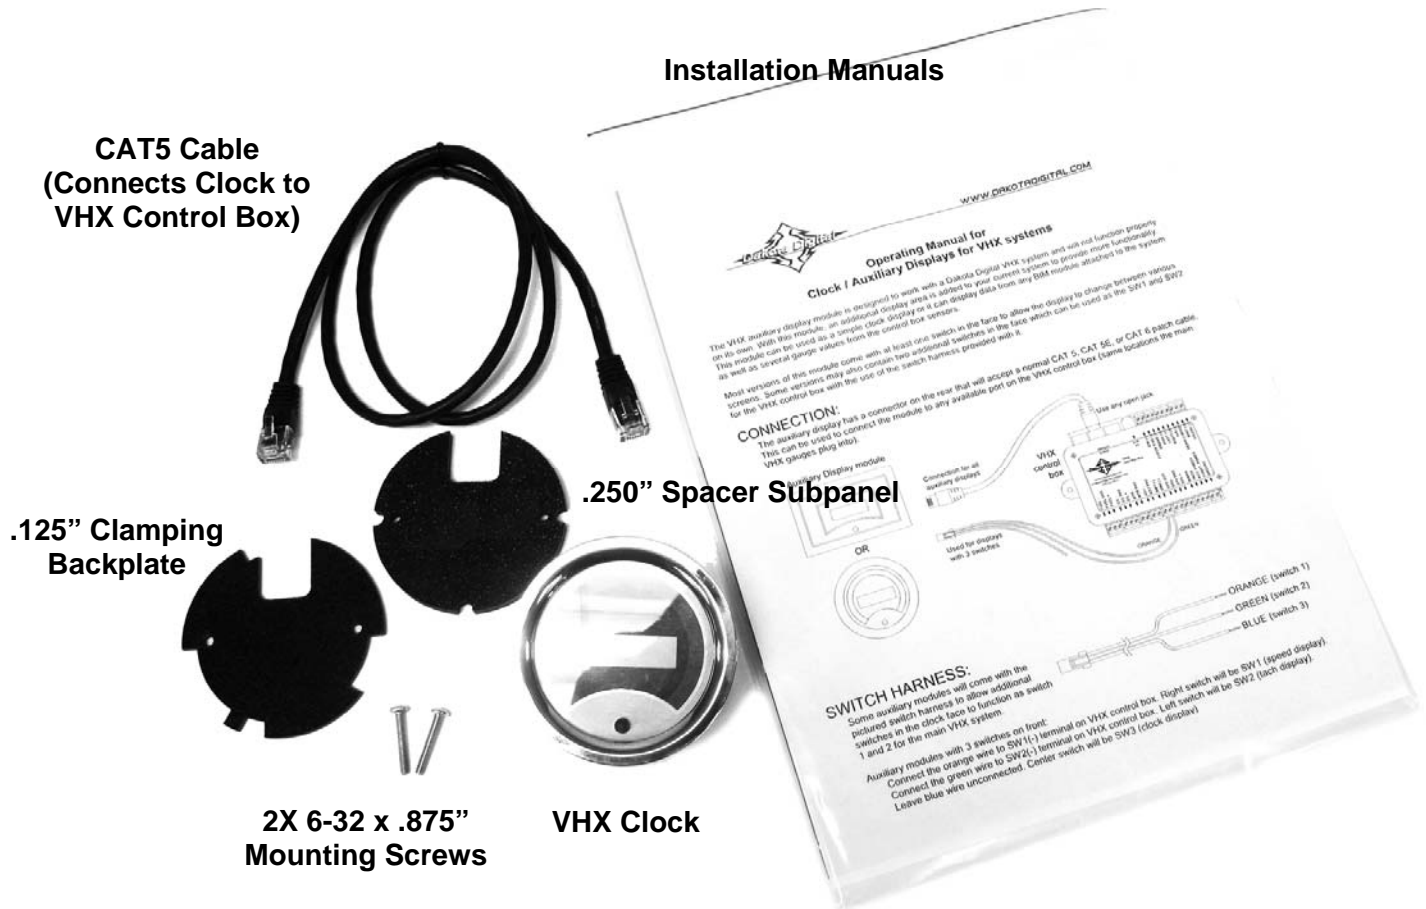

Installation


1. Remove the speaker bezel from the car. Now is a good time to clean the bezel. Set the .250" thick Spacer Subpanel on the back of the clock, and slide them into the front of the speaker as shown.






2. Flip the bezel over. Align the .125" thin Clamping Backplate on the back so the connector is at the top.

3. Thread the provided screws into the two locations shown, clamping the system together.

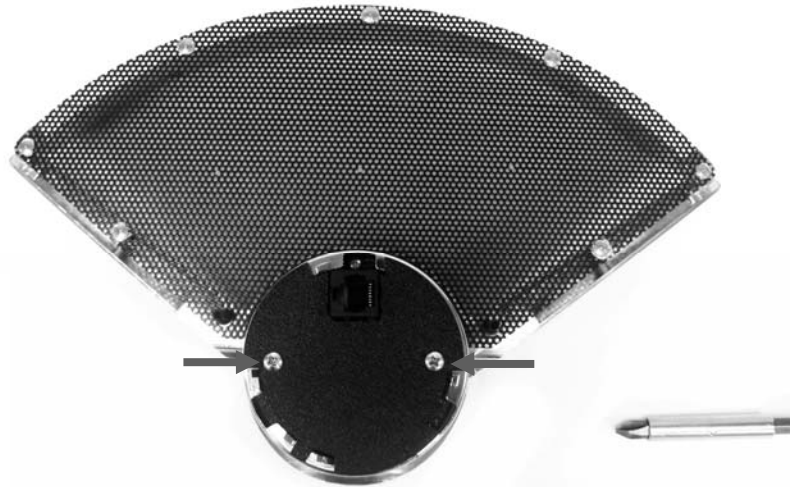

4. Connect the CAT5 cable to the clock. Route this cable back to the control box.

5. Reinstall the speaker in to the dash and refer to the Operating Manual to complete the VHX clock setup.

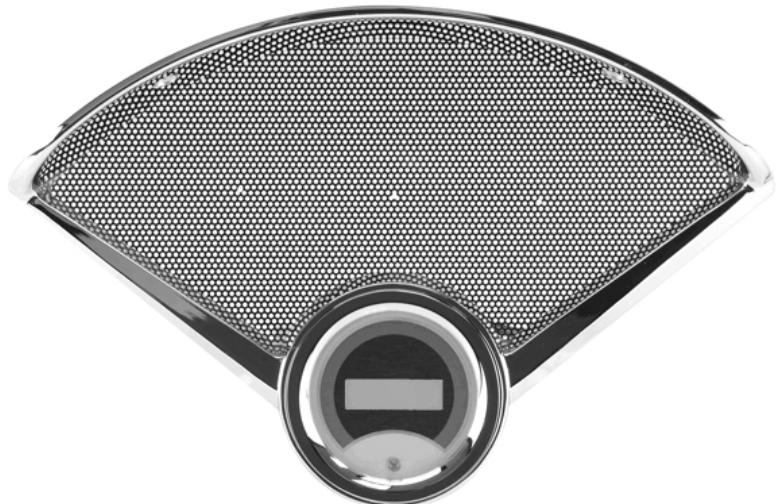

4510 W. 61st St. N., Sioux Falls SD 57107
 Phone: (605) 332-6513 Fax: (605) 339-4106
www.dakotadigital.com
dakotasupport@dakotadigital.com