



VHX-68P-GTO

Dakota Digital VHX Instrument Installation
For 1968 GTO

Your new VHX-68P-GTO kit includes:

VHX Display



(1) Blinker Harness



Universal Sender Pack




Switch Assembly



36" CAT5 Cable

12" CAT5 Cable

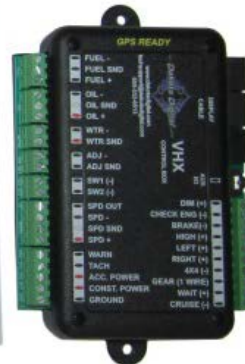


Control Box

Installation

1. Remove the gauge bezel from the dash and save all hardware for reassembly.



2. Remove the stock gauges from the bezel. The only items to be reused are the original front bezel and the hardware that mounts the gauges; the other gauge pieces can be set aside. Now is a good time to clean or refinish the bezel.

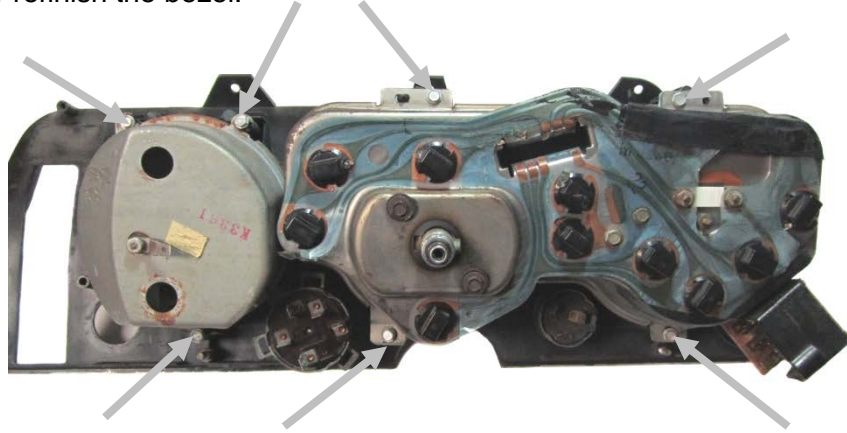

3. Secure the VHX gauges as shown in the picture using the factory hardware. There is adjustment within the mounts so test alignment to the bezel before final torquing.




4. Before the assembled cluster is reinstalled, connect one end of the 12" CAT5 cable to either jack on the Tach and the other end to the Speed assembly. Then, connect one end of the 36" CAT5 cable to the remaining open jack on the Tach; use caution when routing the other end of this cable to the control box mounting location.



5. This system comes with two options for the turn signals. You can either have arrows located in the faceplate of your new VHX display, and/or arrows in your vehicle's stock turn signal locations. To use the new faceplate arrows, follow the wiring instructions for the turn signals found in the main VHX manual.

To optionally use the stock turn signal arrows, do not wire the turn signals to the VHX control box. Instead, use the two provided two-wire harnesses. The harnesses plug directly into connectors on the back side of your new VHX system (one of the harnesses is already connected with the wires running through the back). Connect the wires from these harnesses to your turn signal circuit and ground as shown below. Doing this will light green LED bulbs, located in the original locations of your dash panel, when turn signals are active. Make sure to check left and right to verify they are wired correctly.

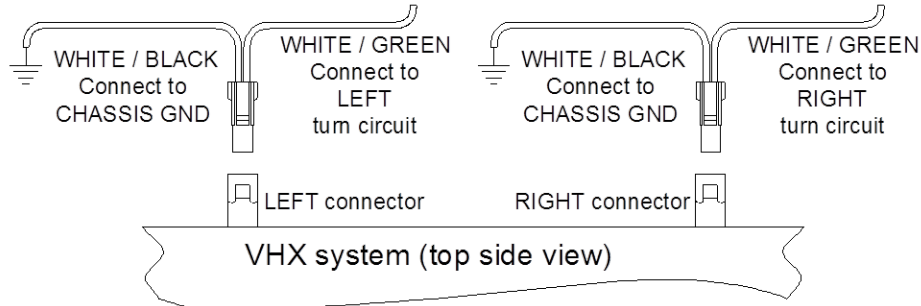

6. Re-install the bezel into the vehicle using stock hardware and refer to the main manual for wiring instructions to complete the VHX installation.



⚠ WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov



4510 W. 61st St. North
Sioux Falls, SD 57107
www.dakotadigital.com
dakotasupport@dakotadigital.com

Phone (605) 332-6513
Fax (605) 339-4106

Copyright 2011 - Dakota Digital, Inc.