



GRFX-47C-PU

Dakota Digital GRFX Instrument Installation
For 1947-'53 Chevy Pickups

Your new GRFX-47C-PU kit includes:


GRFX Display



Universal Sender Pack



Installation Manuals

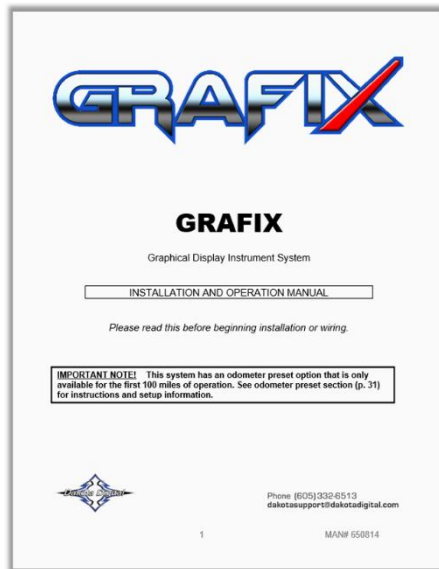

Control Box



Interconnect Harness



(8) #4-40 X .312" Screws



(2) Foam Gaskets



36" Main Harness

(4) ABS Mounting Tabs



Installation

1. Remove the stock gauges from the dash. Each gauge is held in place by four nuts on studs on the back of the dash. Retain these nuts as they will be used to secure the new GRFX system.




2. Your GRFX system provides two locations on each display side for the included lower **ABS Mounting Tabs**. For each display, choose the location needed by aligning all four mounting tabs to the studs in the vehicle's dash. Once the correct mounting location is determined; secure the lower tabs to the housing in the appropriate location using the eight supplied **#4-40 x .312" Screws**, four per display.




3. Place the two supplied **Foam Gaskets** over the new GRFX bezels.




- Secure the new GRFX displays to the dash using the retained original nuts, eight total.

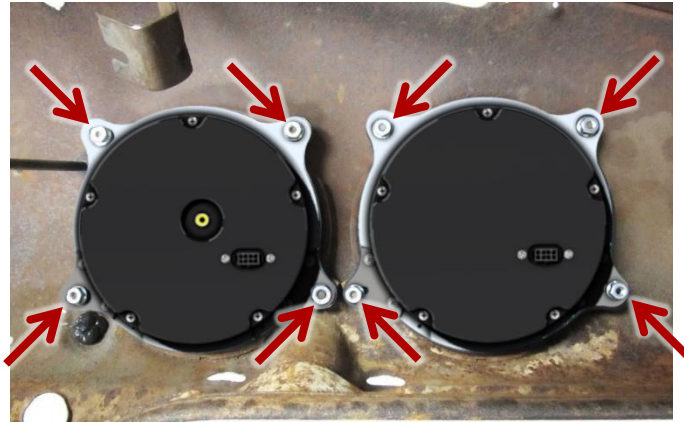

- Connect the provided **Interconnect Harness** to the back of the GRFX system. If desired, a backup camera can also be connected to the provided RCA input.

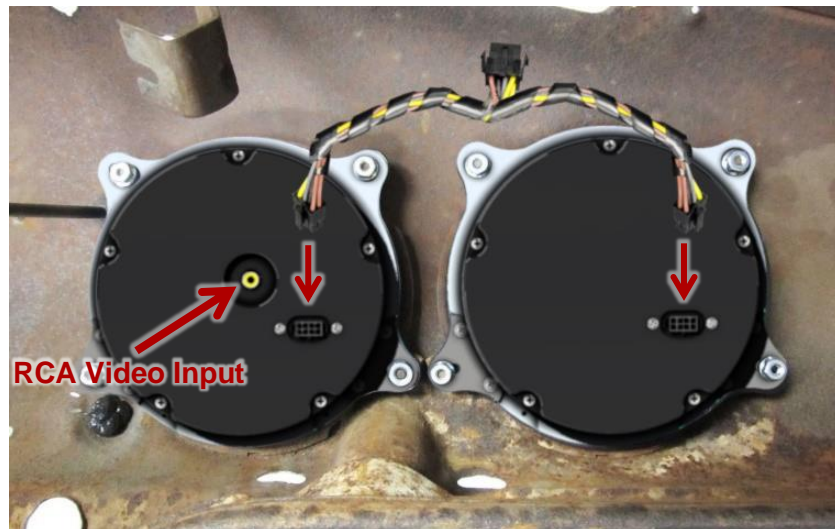

- Connect the provided **36" Main Harness** to the open end of the interconnect harness.

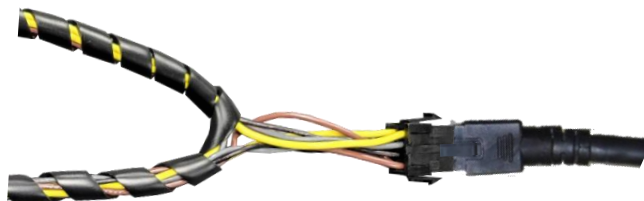

7. Carefully route the open end of the main harness to the control box mounting location. Refer to the included main GRFX manual for wiring instructions to complete the installation.



⚠WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov



4510 W. 61st St. North
Sioux Falls, SD 57107
www.dakotadigital.com
dakotasupport@dakotadigital.com

Phone (605) 332-6513
Fax (605) 339-4106

© Copyright 2024 - Dakota Digital