



GRFX-55C-PU
 Dakota Digital GRFX Instrument Installation
 For 1955-59 Chevy Pickup

Your new GRFX-55C-PU kit includes:

GRFX Instrument Cluster



Universal Sender Pack



Installation Manuals




Main Harness



Control Box

Foam Tape



**6x Lock Washers
 6x Screws**




Installation


1. Remove the stock instrument cluster from the pickup.



2. Remove the six screws holding the gauges to the bezel so the stock gauges, separator plate, and lens can be removed.

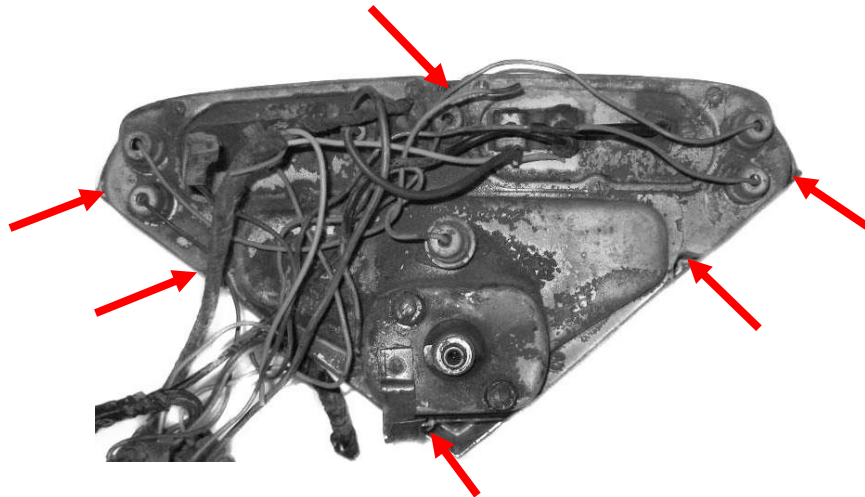

3. Next, cut the supplied foam into 1.5" long strips, and then cut the strips in half lengthwise so you have four pieces total. Install the foam blocks on top of the four bosses around the edge of the bezel to help prevent any lens rattles. The foam will compress against the lens once the system is installed.

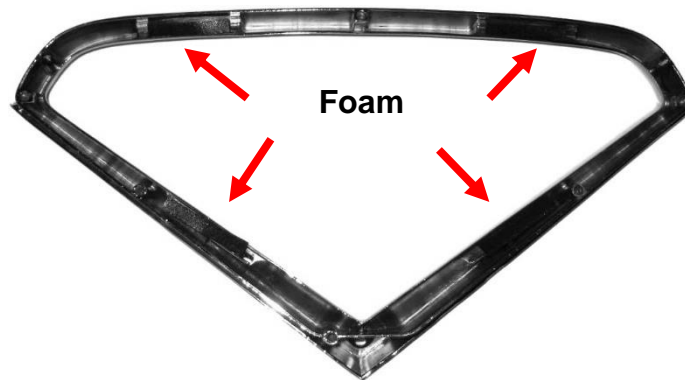

4. Secure the GRFX system to the bezel with the six supplied screws and lock washers.



5. Connect the provided harness from the Display Cable port on the mounted control box location to the back of the GRFX system.
 - 5a. If you plan to install a backup camera to your system, connect the camera to the yellow video plug on the back of the GRFX instrument cluster. Reference the backup camera installation manual to complete the camera installation.



6. Re-install the cluster into the truck and refer to the main manual for wiring instructions to complete the GRFX installation.



Note: Configuration of themes, colors and gauges are covered in the main manual.

⚠️ WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov



4510 W. 61st St. North
 Sioux Falls, SD 57107
 www.dakotadigital.com
 dakotasupport@dakotadigital.com

Phone (605) 332-6513
 Fax (605) 339-4106

© Copyright 2023 - Dakota Digital