



GRFX-60C-PU


Dakota Digital GRFX Instrument Installation For 1960-'63 Chevy Pickups

Your new GRFX-60C-PU kit includes:

GRFX Display











36" Main Harness

Installation

1. Remove the stock gauges from the dash, then remove the seven screws holding the gauges to the bezel on the back of the system.

8" Foam Tape



2. Remove all factory components from the original bezel. This will be the only item to be reused.


Cut the supplied **Foam Tape** into four roughly 2" pieces, then cut these pieces lengthwise to create a total of eight thin strips. Attach these foam strips on the angled inside surface of the bezel. The new GRFX lens will compress against these strips to prevent any lens rattle.



3. Secure the GRFX system to the bezel with the seven provided #6-20 x 1.25" Screws.



4. Connect the provided **36" Main Harness** to the back of the GRFX system. If desired, a backup camera can also be connected to the provided RCA input.

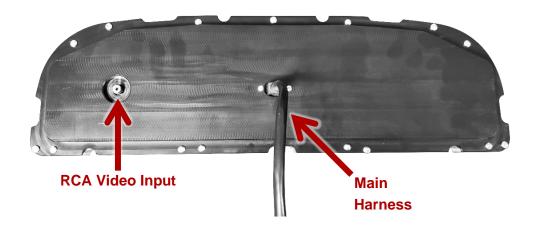

5. Re-install the instrument cluster into the dash and refer to the Main GRFX Manual for wiring instructions to complete the GRFX installation.



▲ WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov



4510 W. 61st St. North Sioux Falls, SD 57107www.dakotadigital.com
dakotasupport@dakotadigital.com

Phone (605) 332-6513 Fax (605) 339-4106

© Copyright 2024 - Dakota Digital