



**GRFX-67C-PU** Dakota Digital GRFX Instrument Installation For 1967-'72 Chevy Pickups

Your new GRFX-67C-PU kit includes:


**GRFX** Display



Universal Sender Pack **Installation Manuals** 

**Control Box** 









36" Main Harness

## Installation


1. Remove the stock gauges from the dash. Remove the eight screws holding the gauges to the bezel on the back of the system. These screws will be used to secure your GRFX system in the stock bezel.

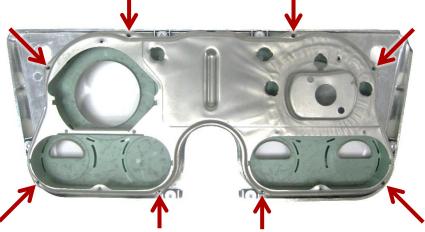


2. Remove the stock gauges, separator plate, and lens from the bezel. The only item to be reused is the original front bezel; the other pieces can be set aside. Now is a good time to clean the bezel and remove any dirt or old lens gasket material.

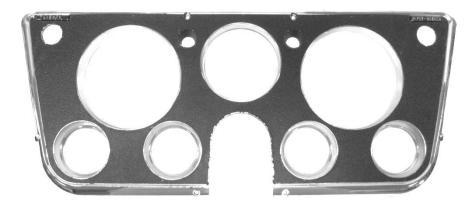

3. Secure the GRFX system to the bezel with the eight screws removed from the stock gauges.

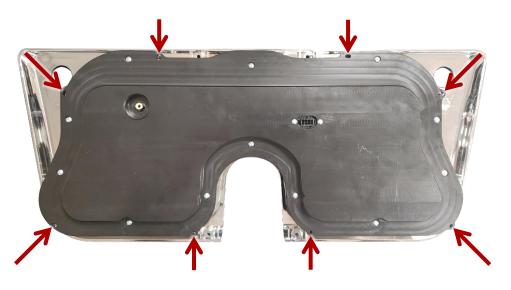

5. Connect the provided **36**" **Main Harness** to the back of the GRFX system. If desired, a backup camera can also be connected to the provided RCA input.

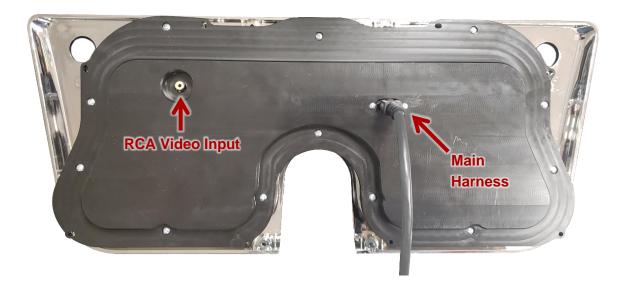

6. Re-install the gauge panel into the dash using factory hardware and refer to the Main GRFX Manual for wiring instructions to complete the installation.



**AWARNING:** This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <u>www.P65Warnings.ca.gov</u>



4510 W. 61st St. North Sioux Falls, SD 57107 www.dakotadigital.com dakotasupport@dakotadigital.com Phone (605) 332-6513 Fax (605) 339-4106

© Copyright 2024 - Dakota Digital

Manual # 650836