



HDX-96J-TJ

Dakota Digital HDX Instrument Installation
For 1996-2003 Jeep Wrangler TJ
Also Fits 1997-2001 Jeep Cherokee XJ

Your new HDX-96J-TJ kit includes:

HDX Display



Buzzer

Installation Manuals

Universal Sender Pack



4x #8 x 1" Sheet Metal Screws



36" Main Harness



Control Box

Installation

1. Remove the dash trim and instrument shroud by removing the screws highlighted below. Retain these original fasteners for reassembly. **Note: Disassembly for '97-2001 Jeep Cherokee dashes will differ from below.**

Dash Trim



Shroud Bottom



Shroud Top




Note: The clip-in trim strip with vent along the top of the dash will also need to be removed.

2. Remove the factory instrument cluster by removing the four screws highlighted below, these screws will not be reused, and can be set aside.



3. Attach the provided **36" Main Harness** to the back of the HDX system. The optional **Buzzer** may also be attached for audio feedback. Carefully run the other ends of these harnesses to the control box and buzzer mounting locations.

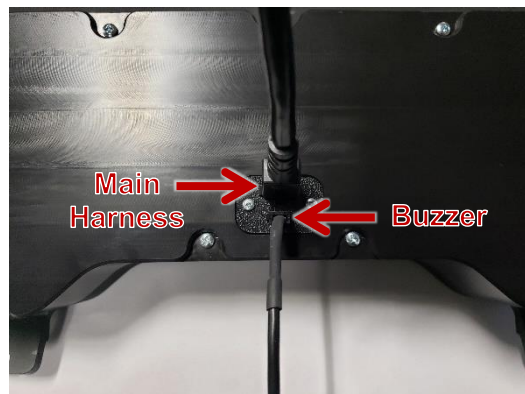

- After removing the protective film, carefully insert the new HDX system into the dash. Fasten the system to the original mounting locations using the four provided **#8 x 1" Sheet Metal Screws**. Reassemble the dash shroud and trim in reverse order using the fasteners retained in step one.



- Refer to the main HDX manual for wiring instructions to complete the installation.



⚠ WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov



4510 W. 61st St. North
Sioux Falls, SD 57107
www.dakotadigital.com
dakotasupport@dakotadigital.com

Phone (605) 332-6513
Fax (605) 339-4106

© Copyright 2022 - Dakota Digital