



RTX-33F

Dakota Digital RTX Instrument Installation
For 1933-34 Ford Car

Your new RTX-33F kit includes:

RTX Display



Universal Sender Pack



Installation Manuals
and Cutout Template



Main Harness

Switch Assembly



Control Box

(2x) U-Brackets
(4x) Thumb Nuts



Ford Adapter



Installation


1. Use the provided template to mark out the opening needed to fit the RTX display. Ensure there is adequate clearance behind the desired mounting location. The display unit needs approximately two inches of depth behind the dash.

2. With the appropriate opening cut, place the RTX display into the dash and attach the two (2) U-brackets to the back of the display using the provided thumb nuts.



Buzzer Connector Main Harness

3. Connect the provided main harness and the buzzer (optional for audio feedback) to the back of the RTX system. Carefully route the other end of the main harness to the control box mounting location and refer to the main manual for wiring instructions.

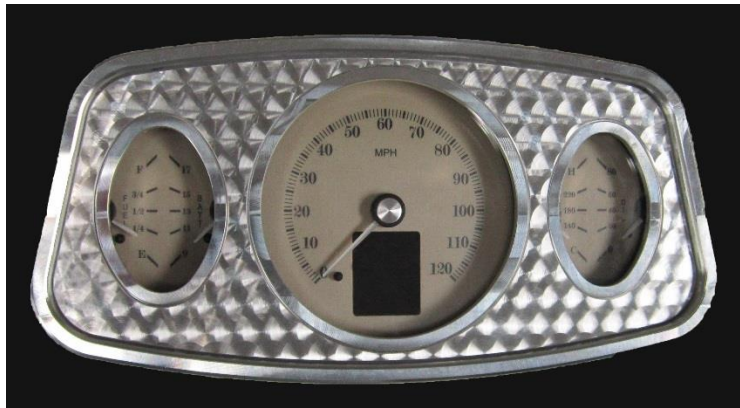

⚠ WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov



4510 W. 61st St. North
Sioux Falls, SD 57107
www.dakotadigital.com
dakotasupport@dakotadigital.com

Phone (605) 332-6513
Fax (605) 339-4106

© Copyright 2020 - Dakota Digital