



RTX-47C-PU

Dakota Digital RTX Instrument Installation
For 1947-'53 Chevy Pickups

Your new RTX-47C-PU kit includes:

RTX Display



Universal Sender
Pack

Buzzer

Switch Assembly



Main Harness



Control Box

4x Thread Cutting
Screws



4x Machine Screws



Foam Gaskets



Interconnect Harness

4X Mounting Tabs



Installation

1. Remove the stock gauges from the dash. Each gauge is held in place by four nuts on studs on the back of the dash. Save the nuts as they will be re-used to secure the new RTX kit.



2. Your RTX kit comes with two variations for lower mounting tab locations, choose the location you need by aligning the four mounting tabs to the studs in the dash. Once the correct mounting location is decided; secure the tab to the housing by lining up the thru-holes in the tab to the holes in the housing and using the four (4) supplied thread cutting screws for the Speedometer and the four (4) machine screws for the Auxiliary gauge.




3. Place the supplied foam gaskets over the new chrome bezel.


Foam Gaskets




4. Secure the new RTX Instruments back into the dash re-using the original nuts, eight total.

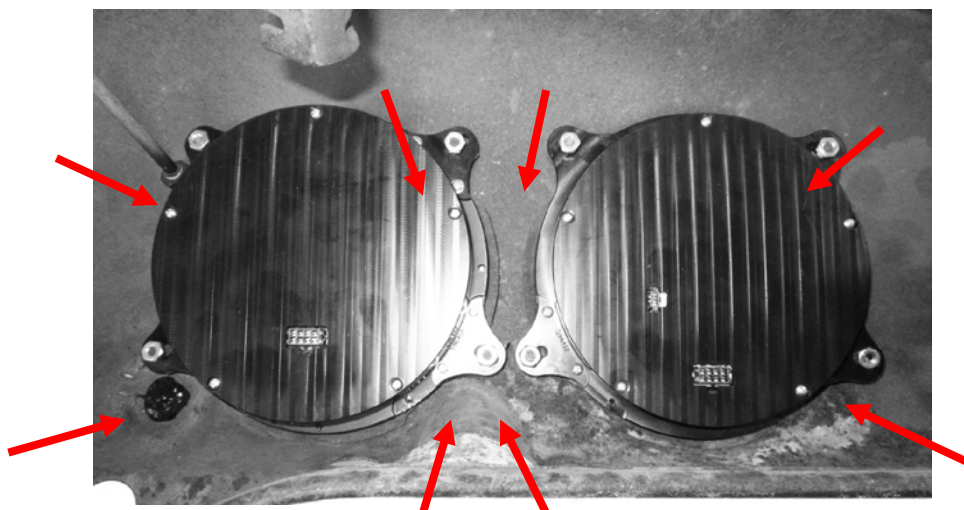

5. Connect the provided interconnect harness to the back of the RTX system.

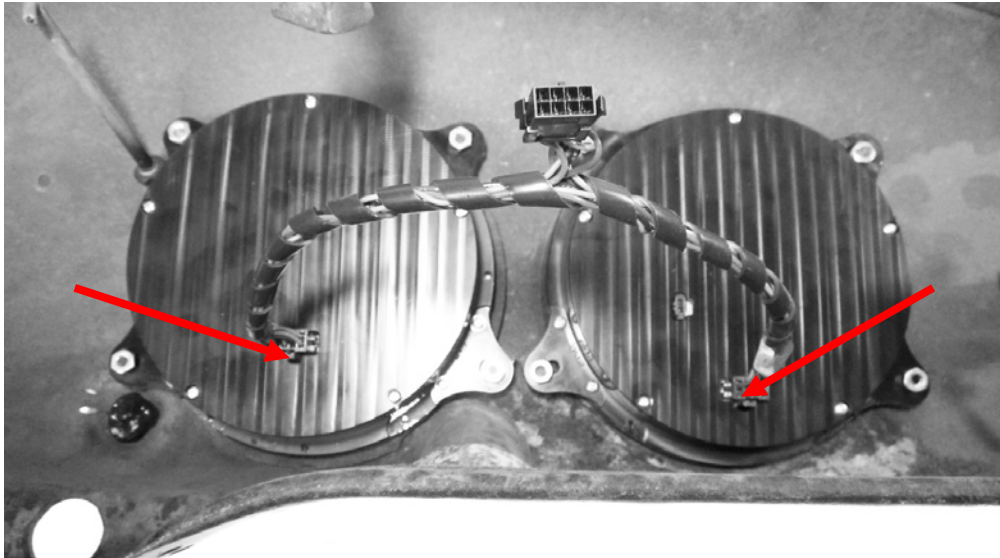

6. Connect the provided main harness and the buzzer (optional for audio feedback) to the back of the RTX system.

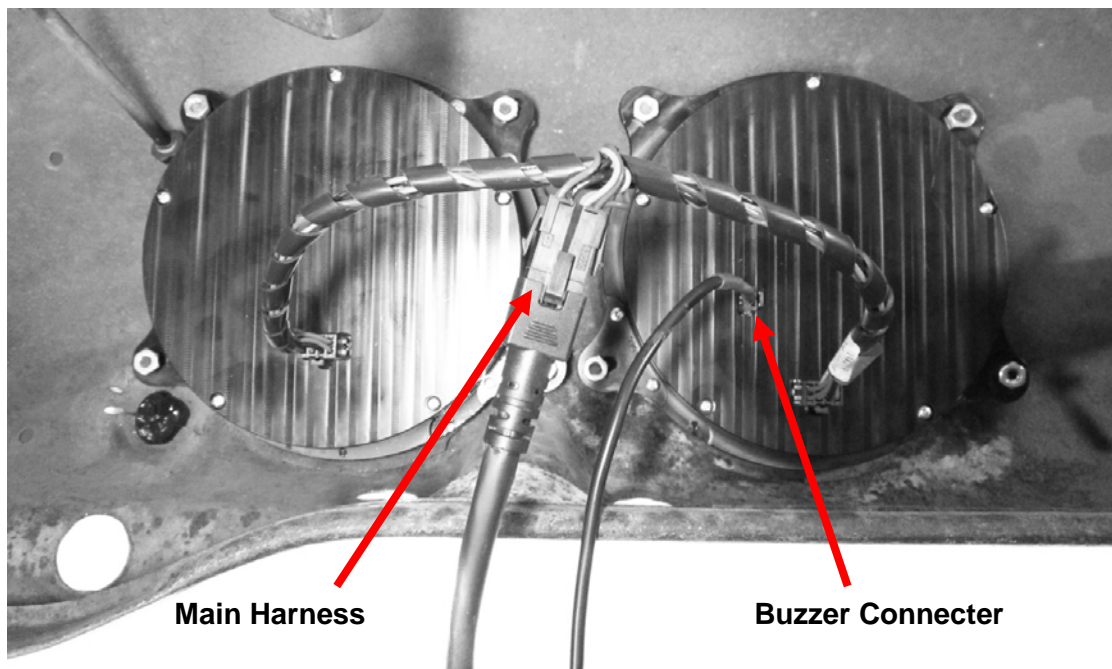

7. Refer to the main manual for wiring instructions to complete the RTX installation.



⚠ WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov



4510 W. 61st St. North
Sioux Falls, SD 57107
www.dakotadigital.com
dakotasupport@dakotadigital.com

Phone (605) 332-6513
Fax (605) 339-4106

© Copyright 2018 - Dakota Digital