



## RTX-55C-PU

Dakota Digital RTX Instrument Installation  
For 1955-'59 Chevy Pickups

Your new RTX-55C-PU kit includes:



RTX Display

Universal Sender  
Pack

Buzzer

Installation Manuals

Switch Assembly

Foam Tape

6x Lock Washers  
6x Screws



Main Harness


Control Box

## Installation


1. Remove the stock instrument cluster from the pickup.



2. Remove the six screws holding the gauges to the bezel so the stock gauges, separator plate, and lens can be removed.

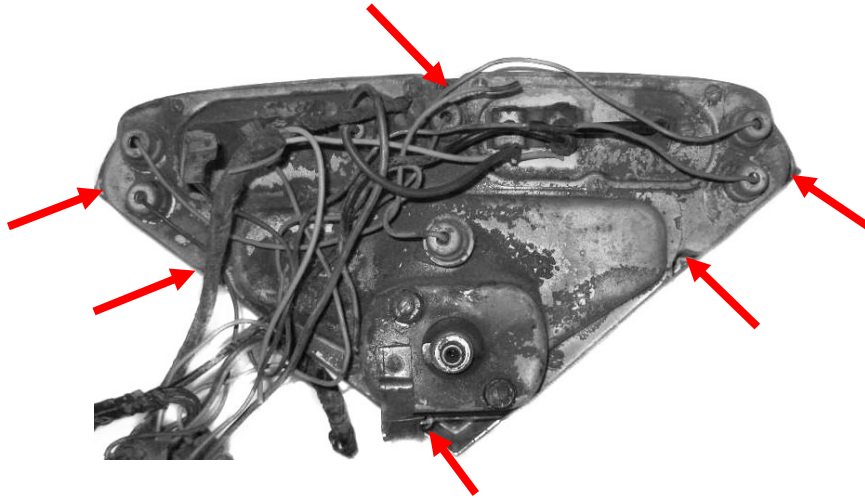


3. Next, cut the supplied foam in half, and then cut the strips in half lengthwise so you have four pieces total. Install the foam blocks on top of the four bosses around the edge of the bezel to help prevent any lens rattles. The foam will compress against the lens once the system is installed. Make sure the foam isn't visible from the front.

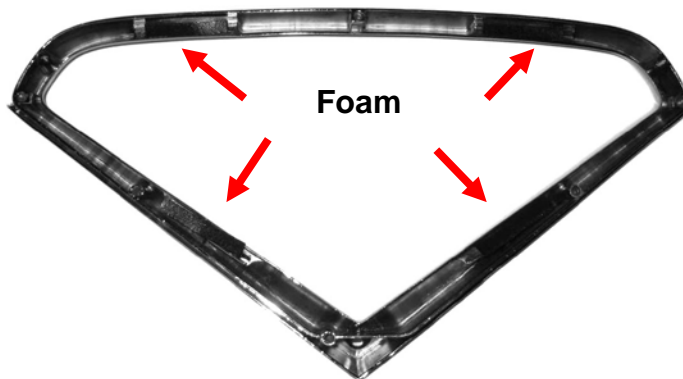

4. Secure the RTX system to the bezel with the six supplied screws and lock washers.



5. Connect the provided harness and the buzzer (optional for audio feedback) to the back of the RTX system.

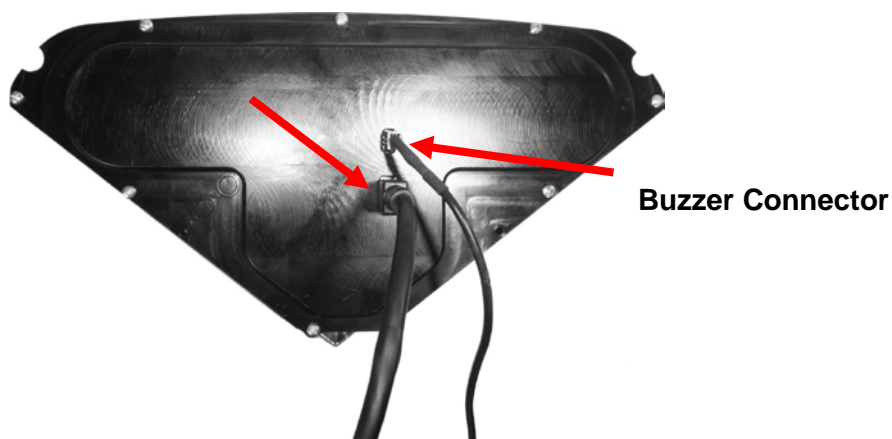

6. Re-install the cluster into the truck and refer to the main manual for wiring instructions to complete the RTX installation.



**⚠ WARNING:** This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)



4510 W. 61st St. North  
Sioux Falls, SD 57107  
[www.dakotadigital.com](http://www.dakotadigital.com)  
[dakotasupport@dakotadigital.com](mailto:dakotasupport@dakotadigital.com)

Phone (605) 332-6513  
Fax (605) 339-4106

© Copyright 2018 - Dakota Digital