



RTX-55C

Dakota Digital RTX Instrument Installation
For 1955-'56 Chevy car

Your new RTX-55C kit includes:

**Block Off Lens
(For Automatic Bezels)**



RTX Display

**Universal Sender
Pack**

Buzzer

**6x Lock Washers
6x Screws**

Installation Manuals



Main Harness



Control Box

Switch Assembly



Foam Tape




Installation

1. Remove the stock instrument cluster from the car.



2. Remove the six screws holding the gauges to the bezel from the back of the system, so the stock gauges, separator plate, and lens can be removed.

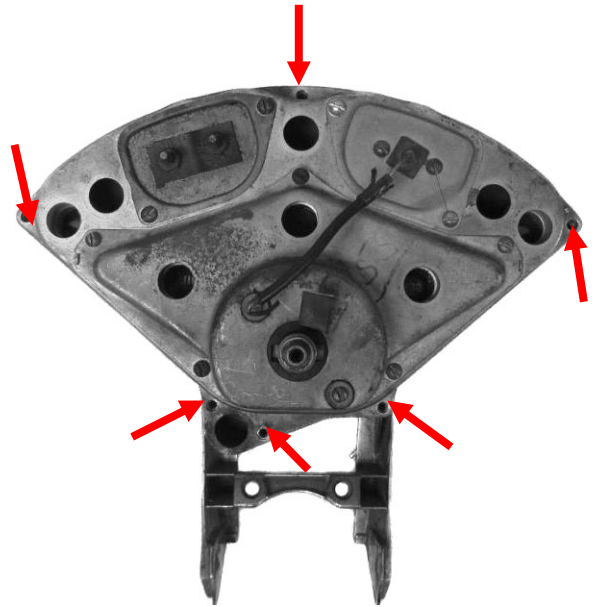


3. For automatic applications, remove the gear position indicator and lens by removing the two screws holding it to the bezel.





4. If you have an automatic bezel, attach the provided block off plate with silicone; the stock gear position indicator will not fit with the RTX system.



5. Next, cut the supplied foam into four small pieces, approximately 1" long, and install four foam blocks into the bezel to help prevent any rattles of the lens and bezel. The foam should sit down in the bezel and adhere to the outer edge, sticking up about 1/8" so it will compress against the lens once the system is installed.

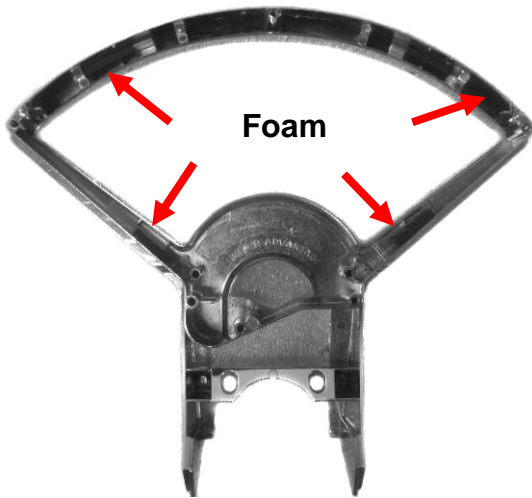

6. Secure the RTX system to the bezel with the six (6) screws and lock washers provided.

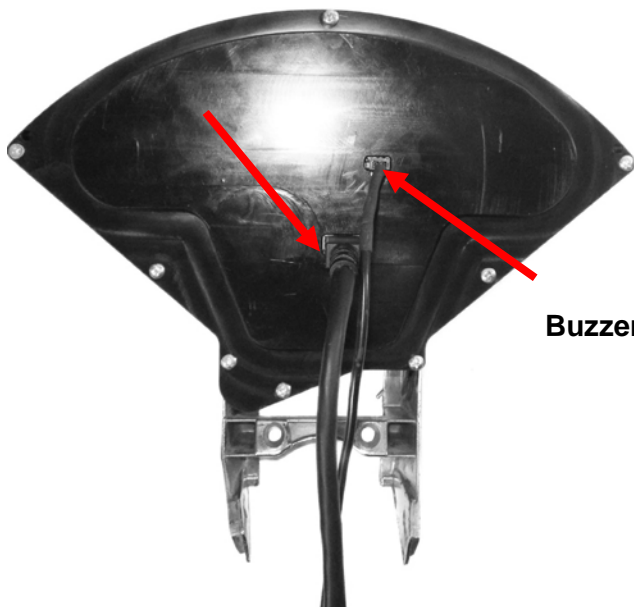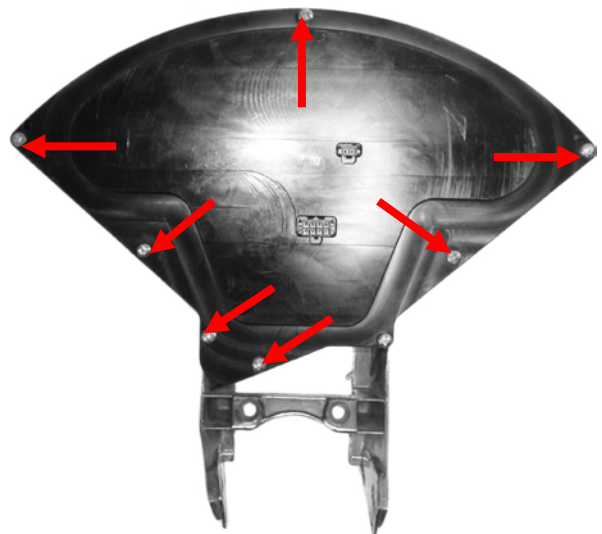

Buzzer Connector

7. Connect the provided harness and the buzzer (optional for audio feedback) to the back of the RTX system.

8. Re-install the gauge cluster to the dash using the factory hardware and refer to the main manual for wiring instructions to complete the RTX installation.



⚠ WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov



4510 W. 61st St. North
Sioux Falls, SD 57107
www.dakotadigital.com
dakotasupport@dakotadigital.com

Phone (605) 332-6513
Fax (605) 339-4106

© Copyright 2018 - Dakota Digital