RTX-57C
Dakota Digital RTX Instrument Installation
For 1957 Chevy car

Your new RTX-57C kit includes:

RTX Display

Block Off Lenses

Switch Assembly

Universal Sender Pack

Buzzer

Installation Manuals

8x Lock Washers
8x Screws

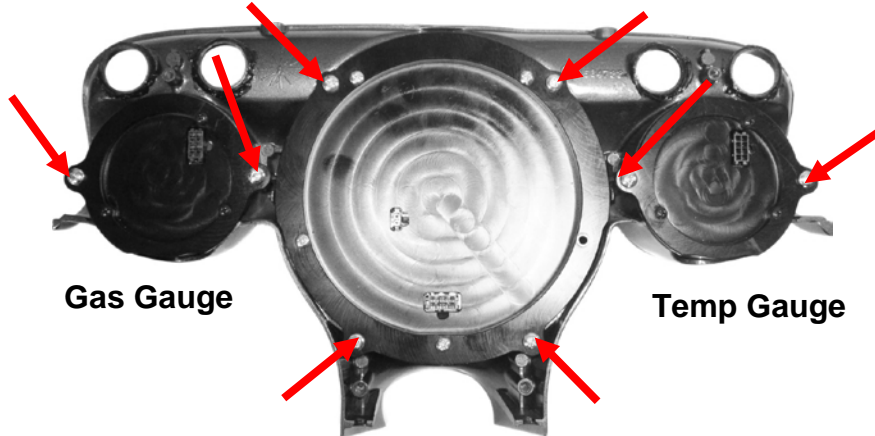**Interconnect Harness**

Main Harness

Control Box

Installation

1. Remove the stock instrument cluster from the car and remove the stock gauges from the back of the housing. The original chrome bezels will be retained.
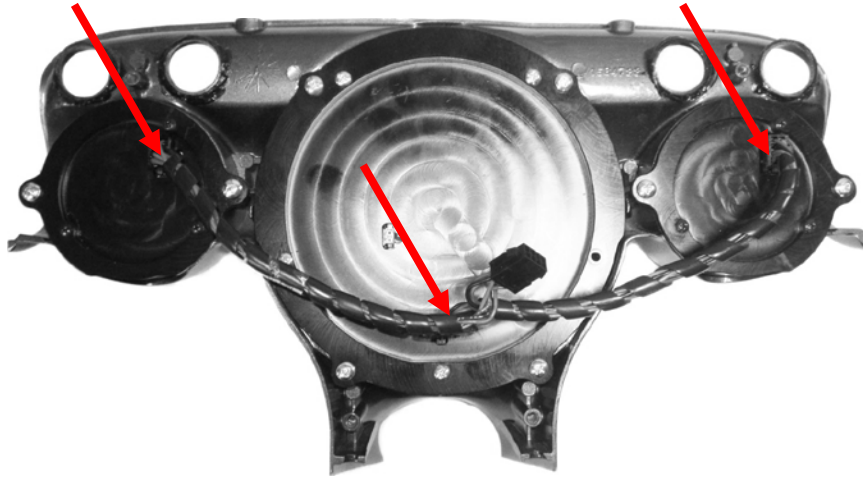
2. With the stock housing lying face down, install the RTX gauges into the housing using the supplied screws and lock washers. The Gas gauge mounts on the left and the Temp mounts on the right when looking at the system from the back.
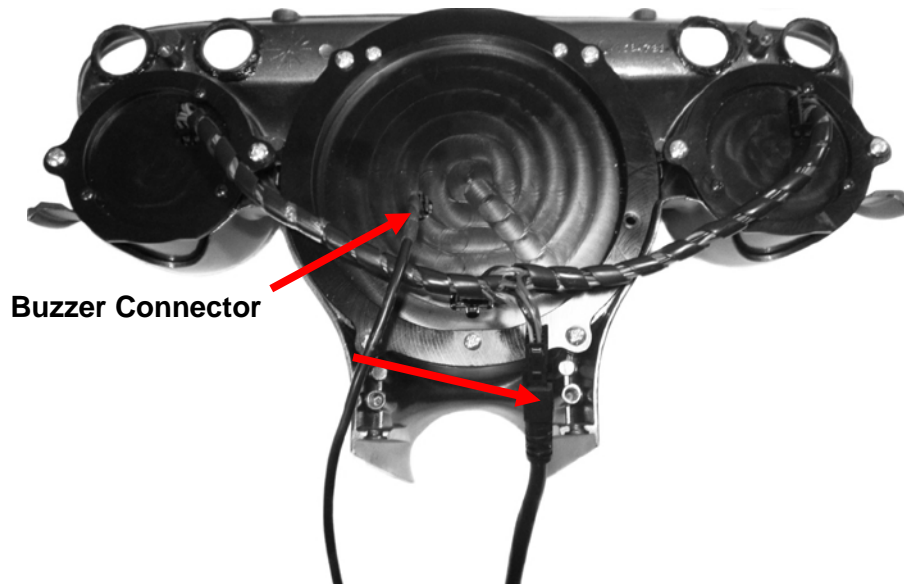
Gas Gauge   **Temp Gauge**

3. This step is optional; if you'd like to retain the original indicator lights, skip to step four. If you prefer to have all indicators displayed in the RTX system face, four small block-off lenses have been provided to eliminate the stock indicators and leave a clean, blacked-out look. To install the block offs; remove the stock indicator bezels and the stock lens. Drop the new block off lens into the bezel glossy side down and secure with silicone. Allow the glue to dry before handling and re-installing the indicator bezels to the dash.

4. Connect the provided Interconnect Harness to the back of the RTX system.

5. Connect the provided Main Harness to the interconnect harness and the Buzzer (optional for audio feedback) to the back of the RTX system.

Buzzer Connector

6. Re-install the cluster into the vehicle using the factory hardware and refer to the main manual for wiring instructions to complete the RTX installation.

Manual # 650634