



RTX-67C-CAM/RTX-68C-CAM

Dakota Digital RTX Instrument Installation
For 1967-'68 Chevrolet Camaro and Pontiac Firebird

Your new RTX kit includes:



RTX Display

Universal Sender Pack

Buzzer

Installation Manuals

Interconnect Harness



Foam Tape



Main Harness


Control Box

Installation


1. Remove the stock gauge cluster from the dash.



2. Remove the five screws holding the gauges to the bezel on the back of the system.

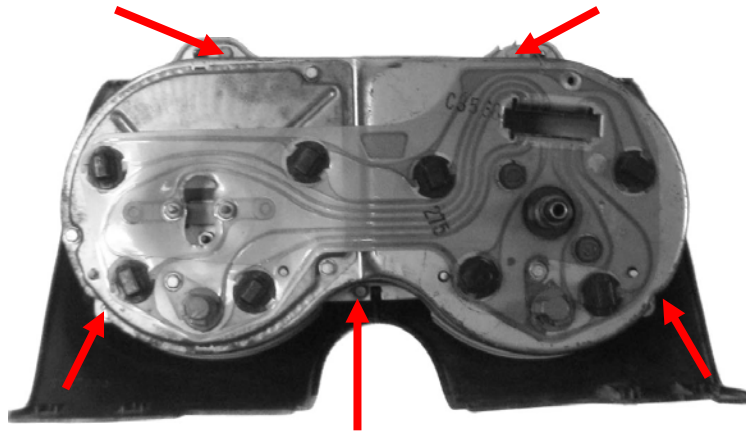

3. Remove the stock gauges and lens from the bezel

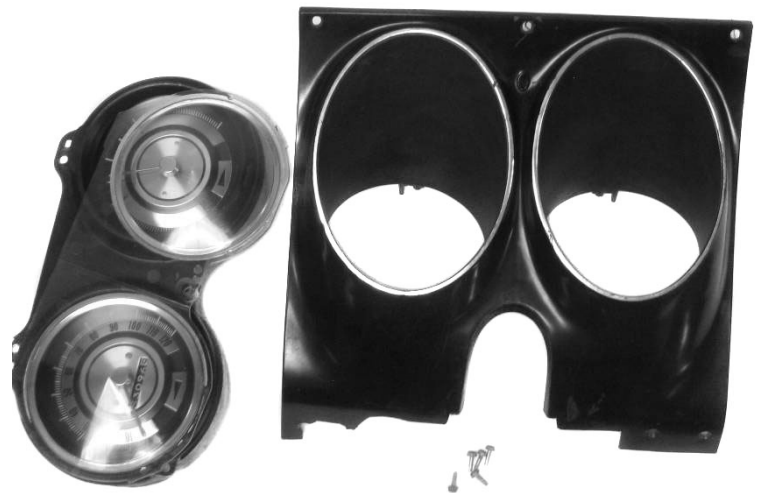


4. For this step, you can re-use the stock foam blocks or use the supplied foam to make replacements for missing or brittle foam pieces. Cut the supplied foam into four small pieces, approximately 1.5" long.




On the top two locations, fold the foam over the edges and make sure it's not sticking into the visible window. In the bottom two corners, the area for the tape is slightly narrower than the foam so you will need to ensure the foam is curved with the opening in the housing.


5. Mount the RTX system to the bezel using the five original screws from disassembly.

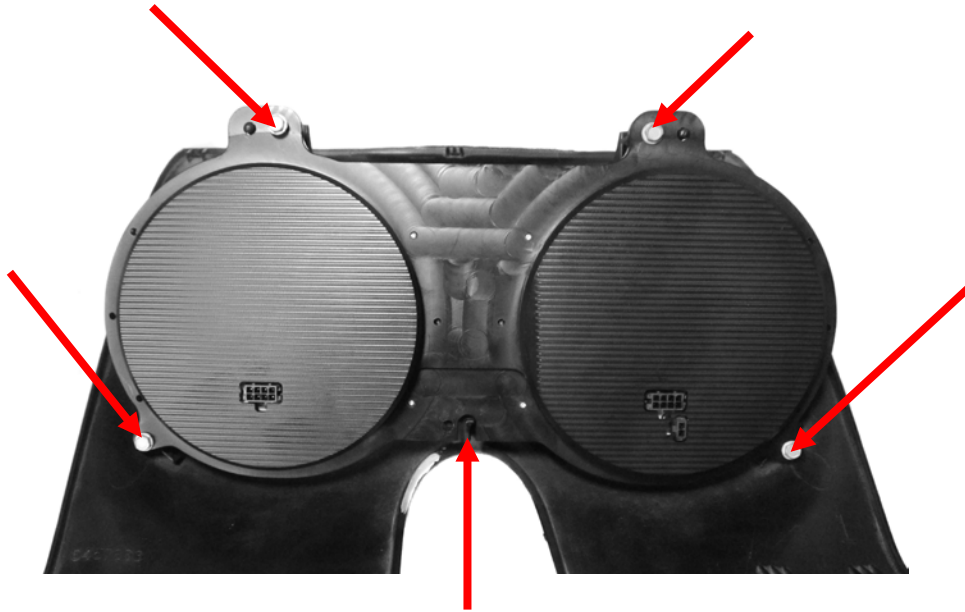


6. Connect the provided interconnect harness to the back of the RTX system.

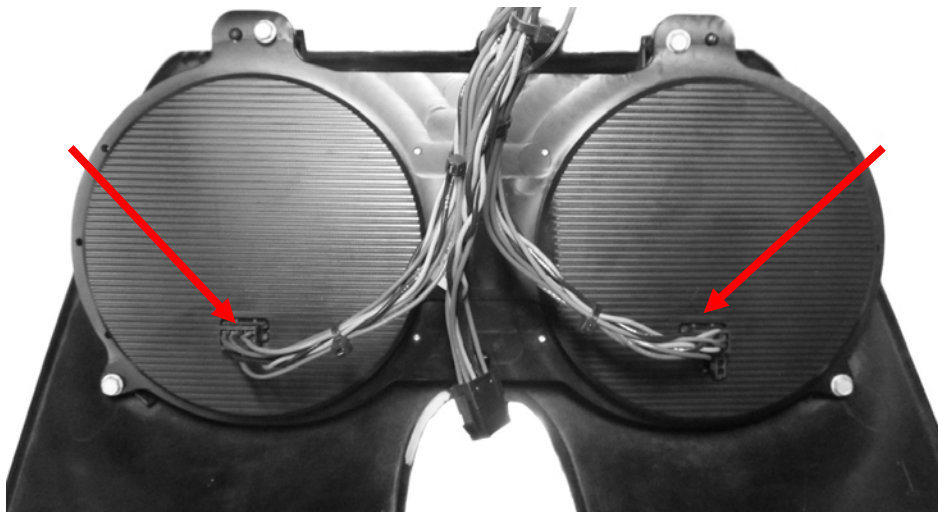

7. Connect the provided harness and the buzzer (optional for audio feedback) to the back of the RTX system.

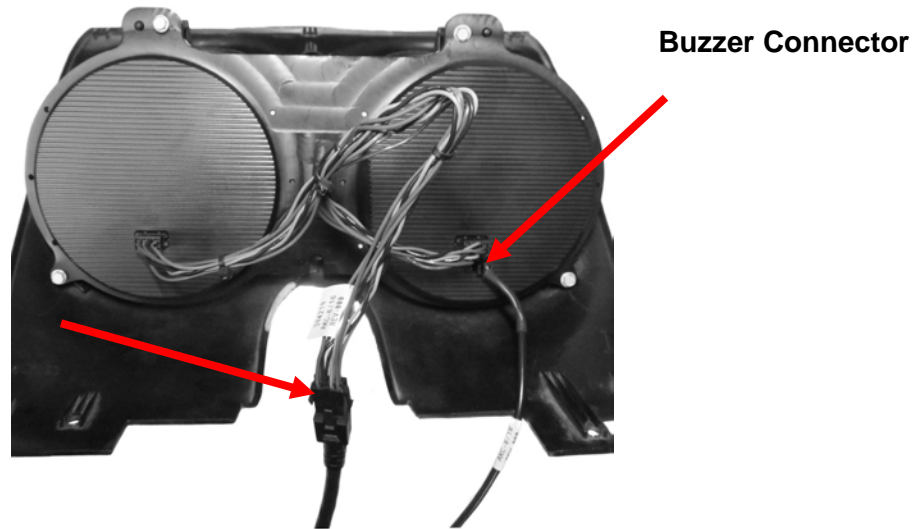

8. Re-install the cluster into the vehicle and refer to the main manual for wiring instructions to complete the RTX installation.

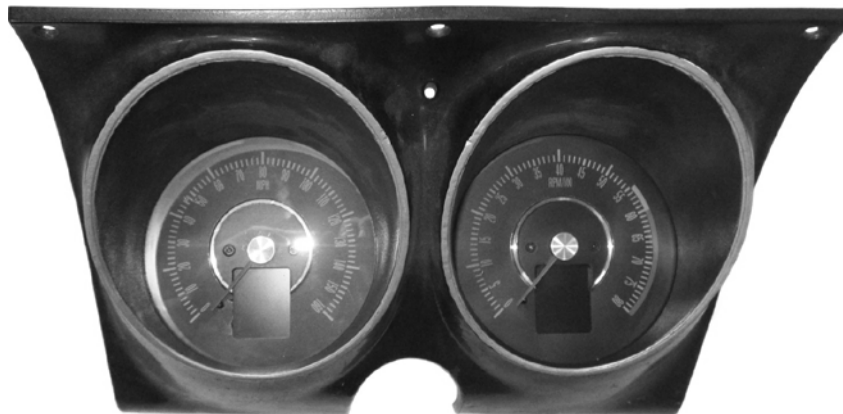

⚠️WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov



4510 W. 61st St. North
Sioux Falls, SD 57107
www.dakotadigital.com
dakotasupport@dakotadigital.com

Phone (605) 332-6513
Fax (605) 339-4106

© Copyright 2018 - Dakota Digital