RTX-67C-PU
Dakota Digital RTX Instrument Installation
For 1967-'72 Chevy Pickups

Your new RTX-67C-PU kit includes:

RTX Display

Universal Sender Pack   **Buzzer**

Installation Manuals

Switch Assembly
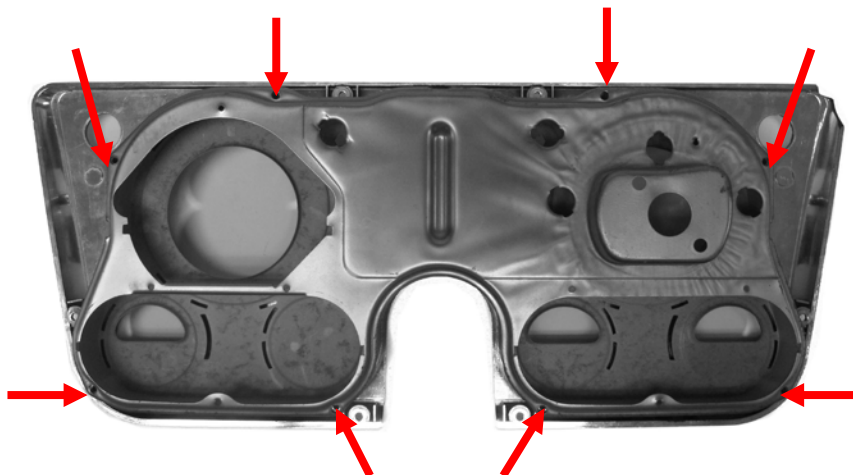
2X Indicator Harnesses
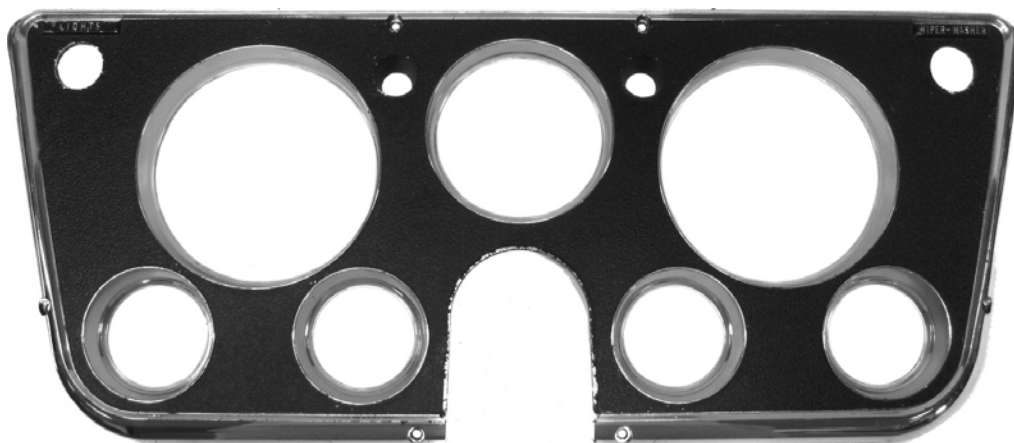
RLC Harness

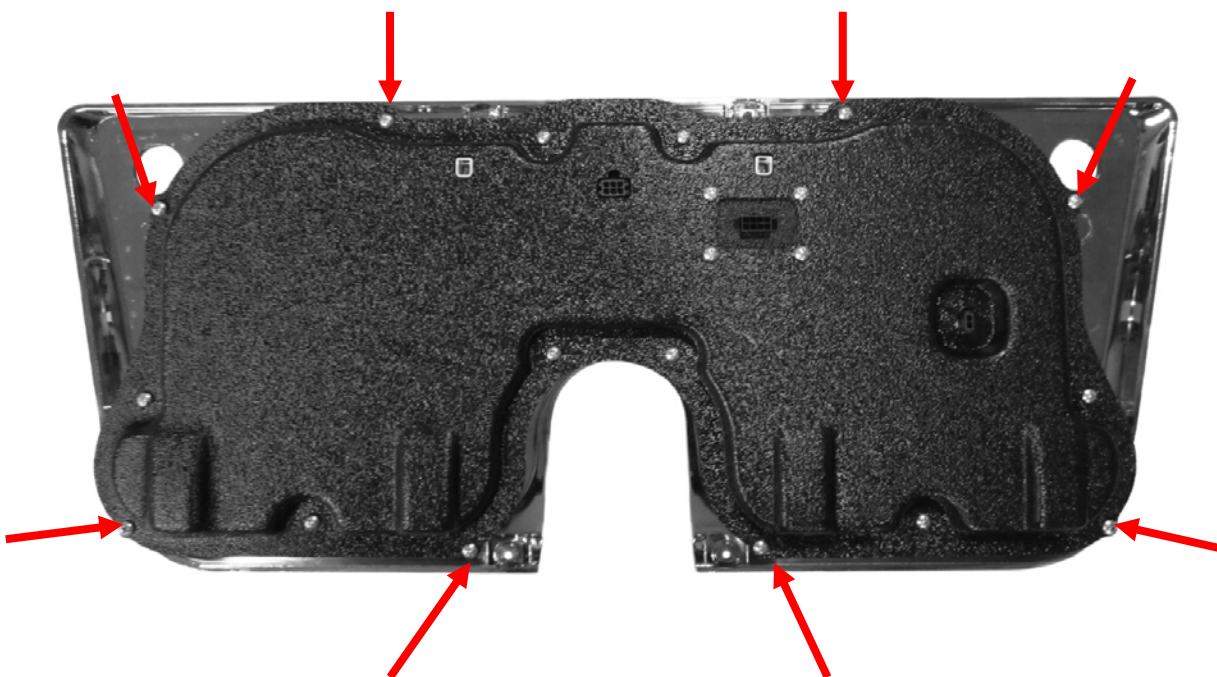**Installation**   **Main Harness**   **Control Box**

1. Remove the stock gauges from the dash. Remove the eight screws holding the gauges to the bezel on the back of the system. These screws will be used to secure your RTX system in the stock bezel.

Manual # 650638

2. Remove the stock gauges, separator plate, and lens from the bezel. The only item to be reused is the original front bezel; the other pieces can be set aside. Now is a good time to clean the bezel and remove any dirt or old lens gasket material.
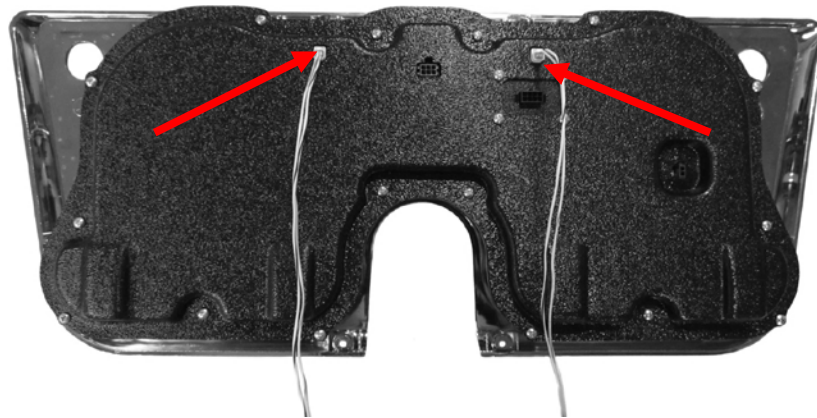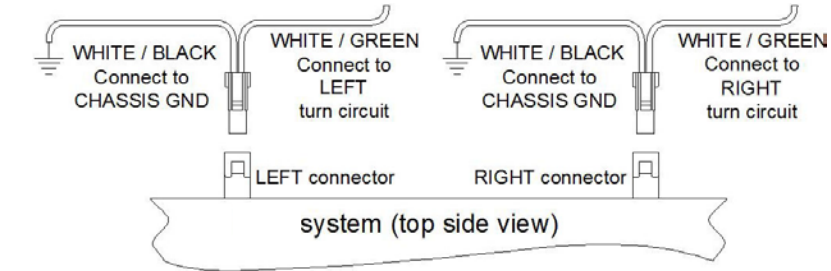

3. Secure the RTX system to the bezel with the eight screws removed from the stock gauges.
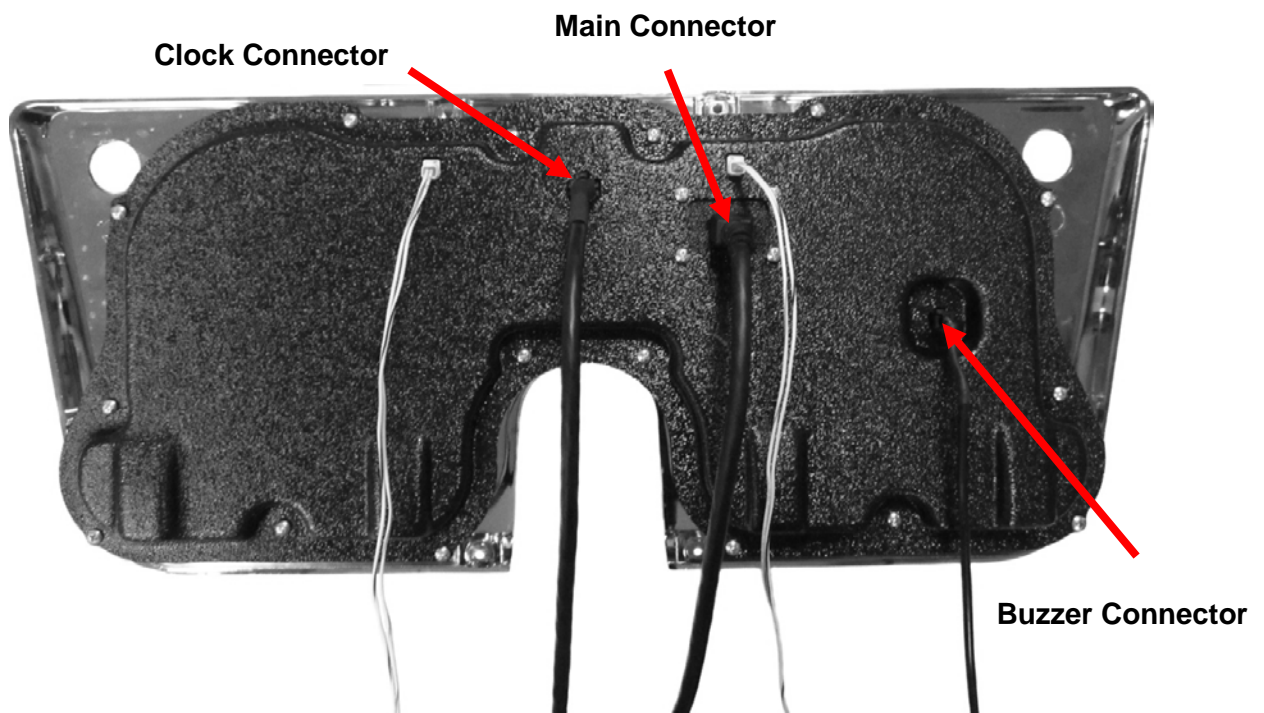
4. This system comes with two options for the turn signals. You can have the indicators located in the faceplate of your new RTX display, and/or arrows in your vehicle's stock locations. To use the new faceplate arrows, follow the wiring instructions found in the main RTX manual.
To optionally use the stock locations, do not wire the turn signals to the RTX control box. Instead, use the two provided two-wire harnesses. The harnesses plug directly into the connectors on the back side of your new RTX system:
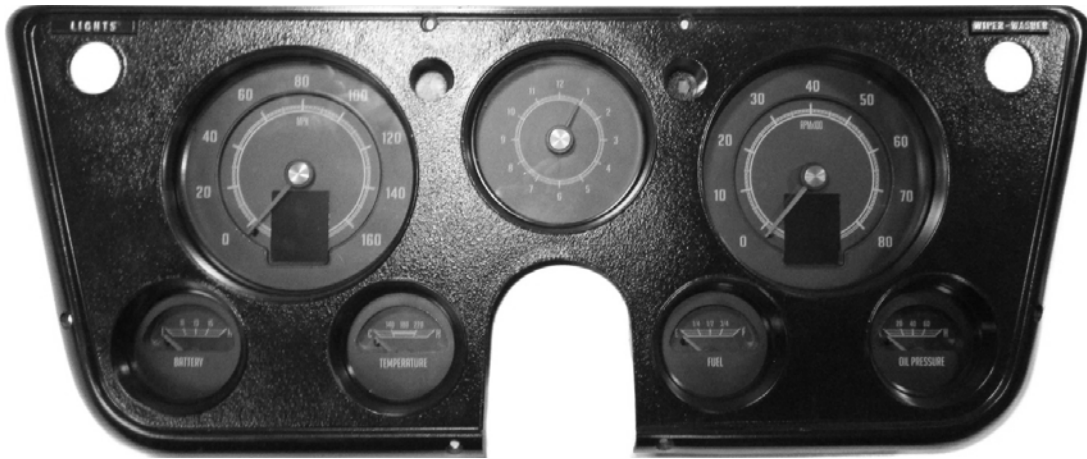WHITE\GREEN wire to INDICATOR CIRCUIT
WHITE\BLACK wire to CHASSIS GROUND

5. Connect the provided main harness, clock harness, and the buzzer (optional for audio feedback) to the back of the RTX system.

6. Re-install the cluster into the truck and refer to the main manual for wiring instructions to complete the RTX installation.

Dakota Digital

4510 W. 61st St. North
Sioux Falls, SD 57107
www.dakotadigital.com
dakotasupport@dakotadigital.com

Phone (605) 332-6513
Fax   (605) 339-4106

© Copyright 2018 - Dakota Digital

Manual # 650638