



# RTX-71I-SCT

Dakota Digital RTX Instrument Installation  
For 1971-80 International Scout

Your new RTX-71I-SCT kit includes:

## RTX Display



## Universal Sender Pack



## Buzzer



## Installation Manuals




## Switch Assembly



## 36" Main Harness




## Control Box

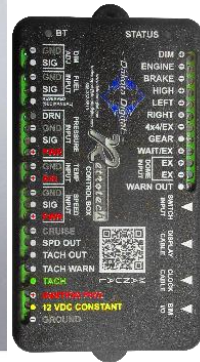


## Interconnect Harness

## Installation

1. Remove the stock gauges and gauge bezel from the dash. Retain all screws and hardware for reinstallation. The original gauges will be not be reused and may be set aside.

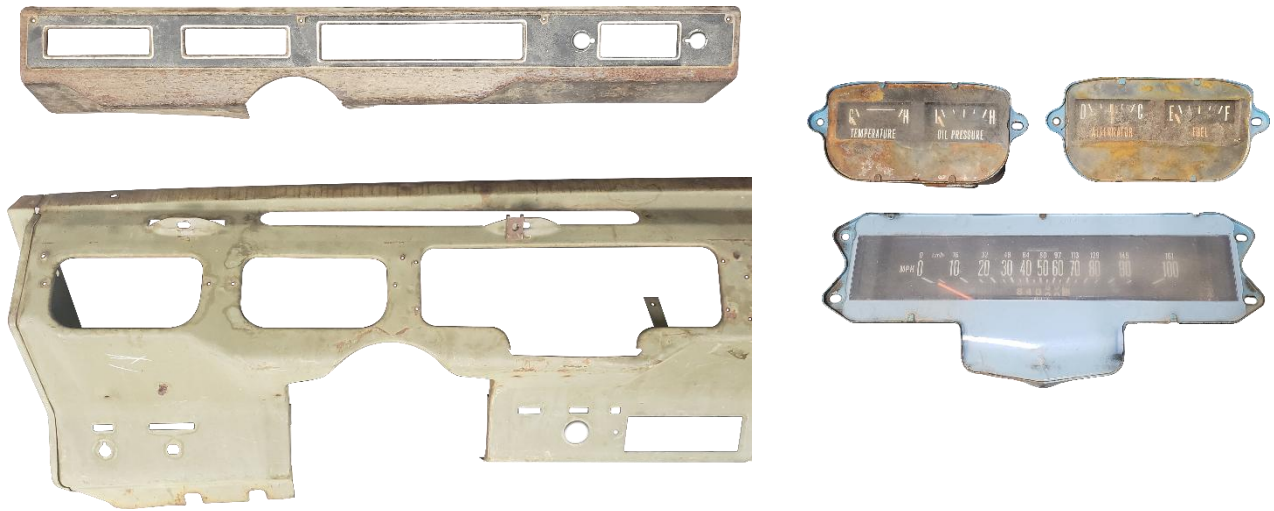


2. Carefully insert the new RTX displays into their respective openings in the dash. Fasten the displays to the dash using the retained eight original screws.

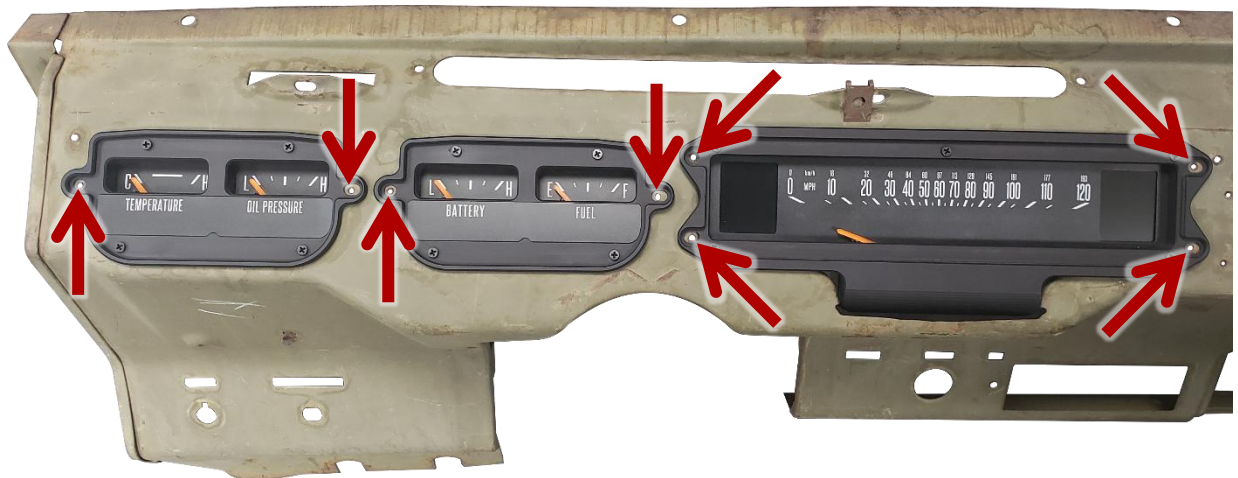


3. From the back side of the dash, connect the included harnesses as shown below.

First; connect the three RTX displays using the provided **Interconnect Harness**.

Second; connect the provided **36" Main Harness** to the open end of the Interconnect Harness. Carefully route the open end of the Main Harness to the desired control box mounting location. The included **Buzzer** may also be connected for optional audio feedback.

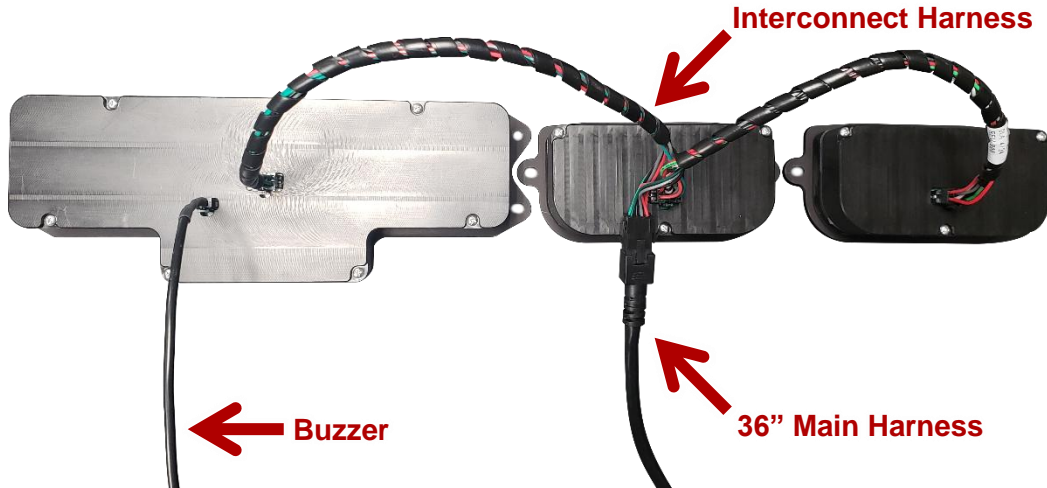

4. Carefully remove the protective lens tape from the front side of the RTX displays. Secure the outer bezel back onto the dash using the original screws. Refer to the main RTX manual for wiring instructions to complete the system installation.

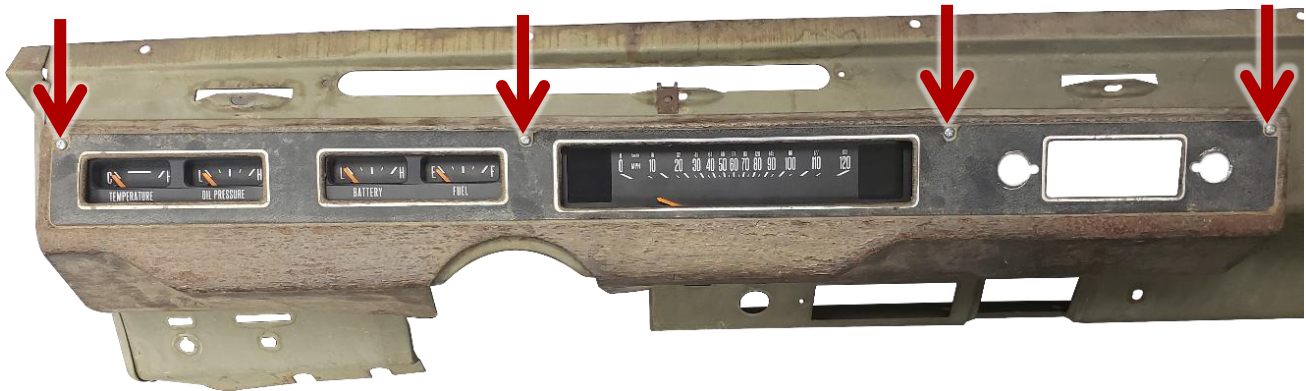

**⚠ WARNING:** This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)



4510 W. 61st St. North  
Sioux Falls, SD 57107  
[www.dakotadigital.com](http://www.dakotadigital.com)  
[dakotasupport@dakotadigital.com](mailto:dakotasupport@dakotadigital.com)

Phone (605) 332-6513  
Fax (605) 339-4106

© Copyright 2024 - Dakota Digital

Manual # 650849