




RTX-73J-WAG

Dakota Digital RTX Instrument Installation For 1973-85 Jeep Wagoneer/FSJ

Your new RTX-73J-WAG kit includes:

RTX Display



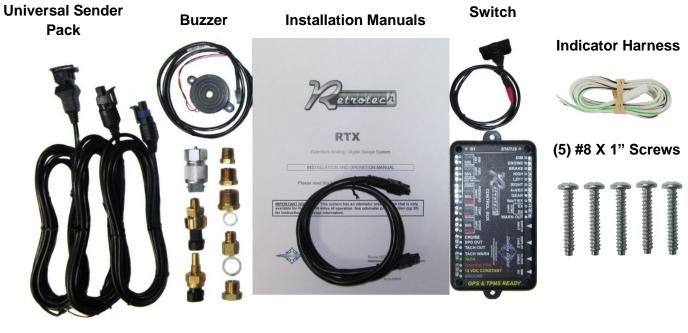

Main Harness Control Box

Installation

1. Remove the stock gauge cluster from the dash. Retain all factory hardware for reassembly. Locations of hardware to remove are shown by the red arrows.



2. Remove the bezel from the stock gauge cluster by removing the five (5) screws shown in red arrows.



3. Cut small tabs on the back face of the stock bezel so the RTX system can sit flat.






4. Attach the OEM bezel to the RTX system by using the provided five (5) #8 x 1" screws.




5. Connect the provided indicator harness to the OEM turn signal locations. Do not wire this harness to the system's control box.

The White/Green wire goes to the indicator circuit, and the White/Black wire goes to the chassis to ground

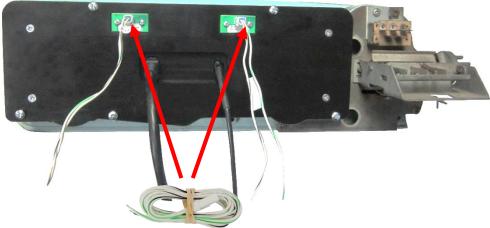

Indicator Harness

6. Connect the provided Main Harness and Buzzer (optional for audio feedback) to the back of the RTX system. Carefully route the other ends to the desired control box and buzzer mounting locations.

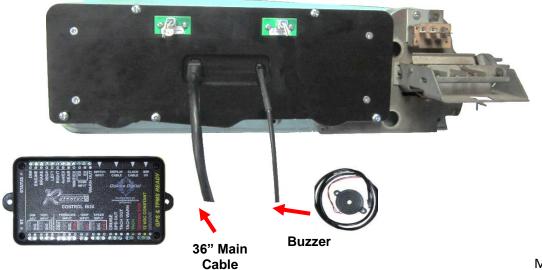

7. Using the six (6) original screws, Mount the RTX system with OEM bezel and switches to the vehicle's dash.



8. Refer to the main manual for wiring instructions to complete the RTX installation.

WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <u>www.P65Warnings.ca.gov</u>



4510 W. 61st St. North Sioux Falls, SD 57107 www.dakotadigital.com dakotasupport@dakotadigital.com Phone (605) 332-6513 Fax (605) 339-4106

© Copyright 2023 - Dakota Digital