



RTX-82P-FIR

Dakota Digital RTX Instrument Installation
For 1982-92 Pontiac Firebird

Your new RTX-82P-FIR kit includes:

RTX Display



Universal Sender Pack



Buzzer



Installation Manuals



Switch
Assembly




36" Main Harness


Control Box

Installation


1. Remove the trim covering the factory instrument panel following the standard disassembly process. The original gauge cluster may then be removed from the dash by removing the six screws indicated below. Retain all factory hardware for later reassembly.

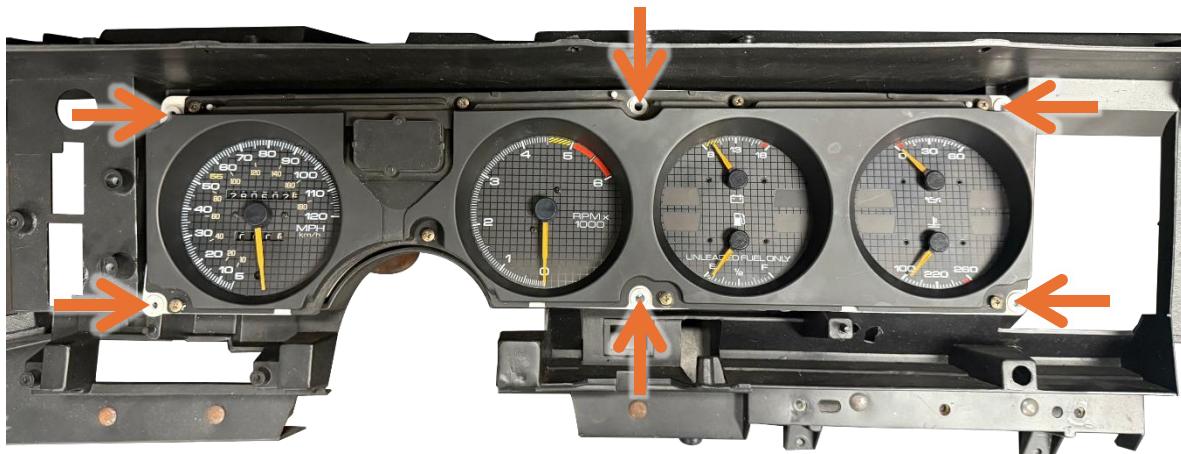

2. Connect the provided **36" Main Harness** and **Buzzer** (optional, for audio feedback) to the back of the RTX system. Carefully route the opposite ends to the desired control box mounting location, through the original instrument cluster opening.

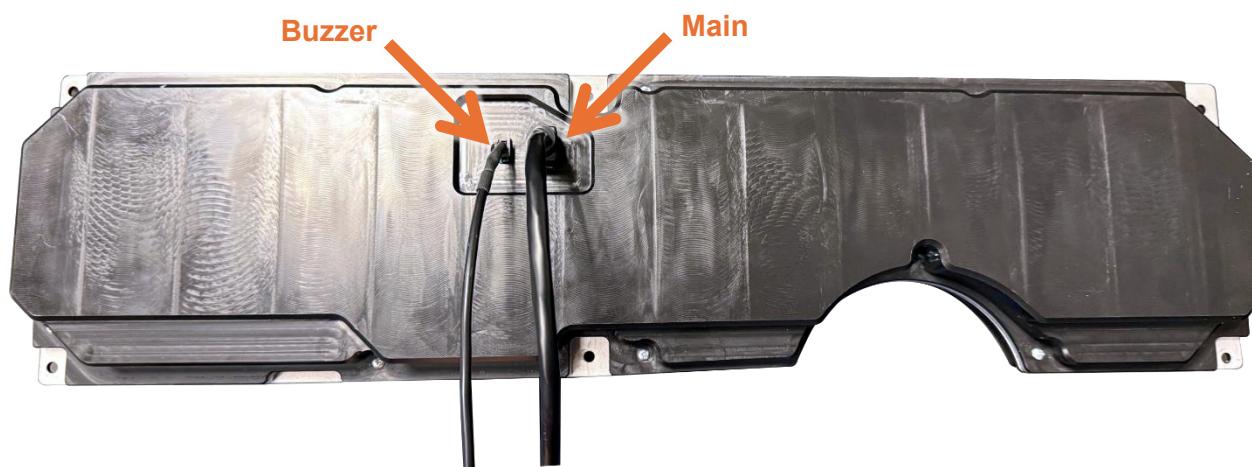

3. Mount the new RTX display to the dash using the six original screws retained during disassembly.

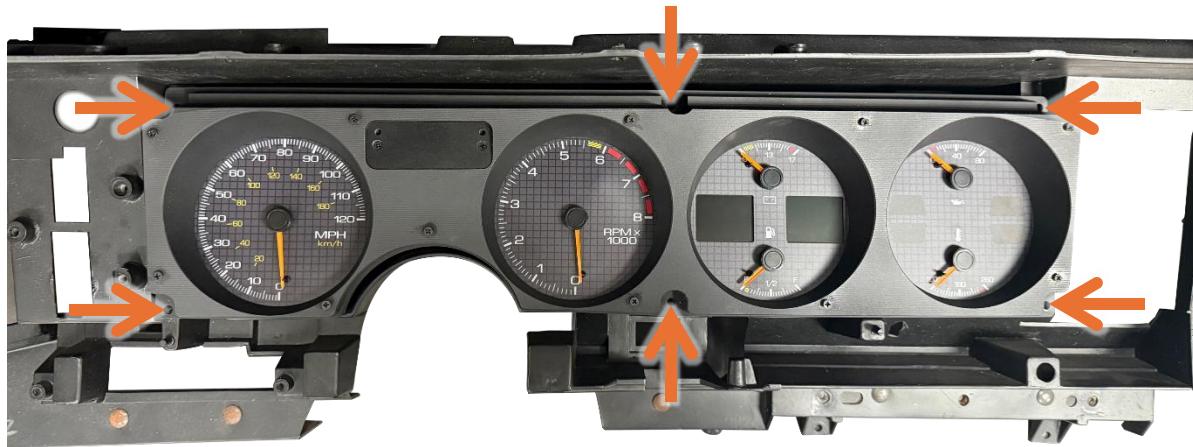

5. Reassemble the dash in reverse order from disassembly using the retained original hardware. Refer to the main RTX manual to complete the system installation.



⚠WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov



**4510 W. 61st St. North
Sioux Falls, SD 57107**
www.dakotadigital.com
dakotasupport@dakotadigital.com

Phone (605) 332-6513
Fax (605) 339-4106

© Copyright 2025 - Dakota Digital