



# RTX-84B-REG

Dakota Digital RTX Instrument Installation  
For 1984-'87 Buick Regal

Your new RTX-84B-REG kit includes:

RTX Display



Alternator Load Harness



Universal Sender Pack



Buzzer



Installation Manuals



36" Main Harness

Switch Assembly




Control Box

## Installation

1. Remove the gauge bezel from the dash. Now is a good time to clean the bezel.




- 1a. The bezel is held in by push-in clips. Note the locations of the clips on the back side of the bezel. Pull near clips when removing the bezel.

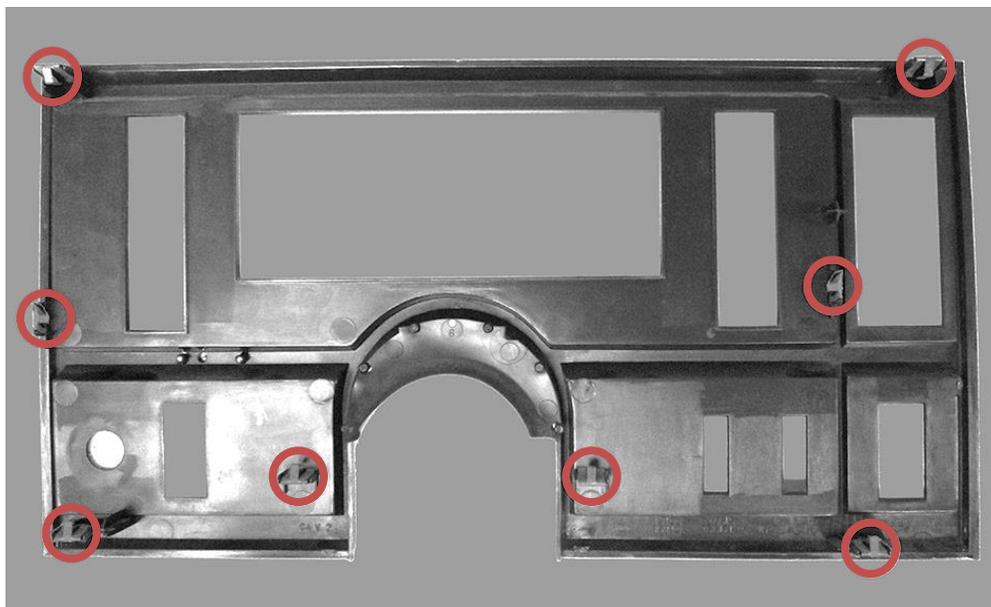

2. Remove the stock gauges by removing the four screws securing the gauges to the dash. A 7mm nut driver will work best for these screws. Keep these screws, as they will be needed to install the RTX system.



3. Connect the provided 36" main harness and buzzer (optional for audio feedback) to the back of the RTX system. Then route the other end of the main harness to the control box.

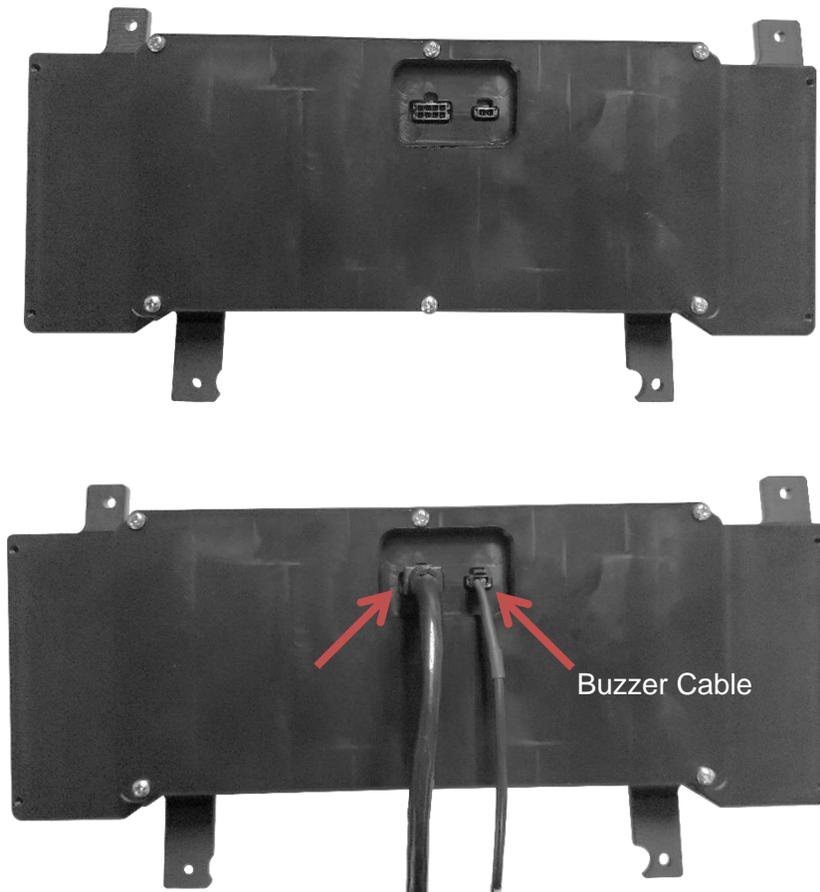

4. Install the RTX system into the dash. Align the four mounting holes and re-use the factory screws to fasten the RTX gauges into the dash.



5. Re-install the gauge bezel and refer to the main manual for wiring instructions to complete the RTX installation.



6. Stock charging systems will need an additional wiring connection at the gauge cluster connector. You will need to add a 300 to 500-ohm resistor between Pin 3 (Brown wire) and Pin 15 (Pink/Black wire). The provided alternator load harness can be used to achieve this.

**⚠ WARNING:** This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)



4510 W. 61st St. North  
Sioux Falls, SD 57107  
[www.dakotadigital.com](http://www.dakotadigital.com)  
[dakotasupport@dakotadigital.com](mailto:dakotasupport@dakotadigital.com)

Phone (605) 332-6513  
Fax (605) 339-4106

© Copyright 2021 - Dakota Digital