



RTX-92C-PU

Dakota Digital RTX Instrument Installation
For 1992-94 Chevrolet/GMC Full-Size Pickup

Your new RTX-92C-PU kit includes:

RTX Display



Universal Sender Pack



Buzzer



Installation Manuals




Switch Assembly



36" Main Harness



Control Box

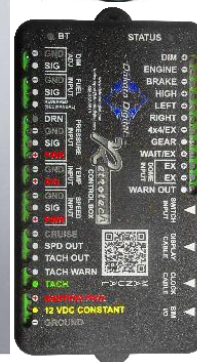


Alternator Load Harness

Installation

1. Remove the original gauge cluster from the dash. Retain all factory hardware for reassembly.



2. Connect the provided **36" Main Harness** and **Buzzer** (optional for audio feedback) to the back of the RTX system. Carefully route the opposite ends to the desired control box mounting location, through the original instrument cluster connector opening.

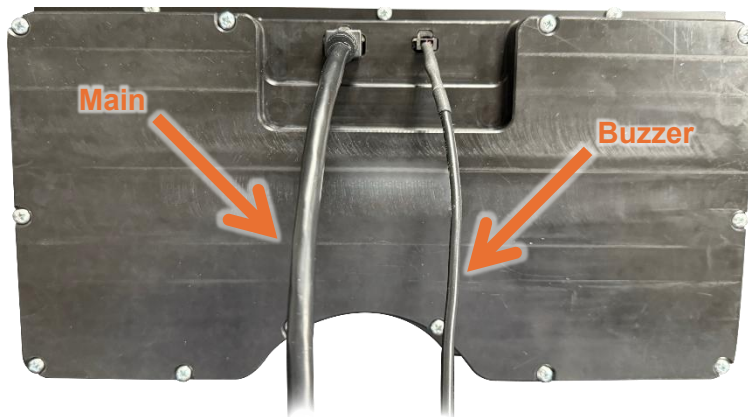

3. Mount the new RTX display to the dash using the four original screws retained during disassembly.



4. Reassemble the dash in reverse order from disassembly using the retained original hardware. Refer to the main RTX manual to complete the system installation.



5. Stock 3-Wire alternators may need an additional wiring connection at the gauge cluster connector.

You will need to add resistance from the Pink/Black wire in the A10 location to the Brown wire in the A3 location. The range needed is 500-30 ohms, three 1/4W 1K resistors in parallel will be in range at 333 ohms. The provided **Alternator Load Harness** can be used to achieve this.

⚠ WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov



4510 W. 61st St. North
Sioux Falls, SD 57107
www.dakotadigital.com
dakotasupport@dakotadigital.com

Phone (605) 332-6513
Fax (605) 339-4106

© Copyright 2025 - Dakota Digital