



VHX-62F-FAR

Dakota Digital VHX Instrument Installation
For 1962-63 Ford Fairlane

Your new VHX-62F-FAR kit includes:

VHX Display



Universal Sender Pack



Switch Assembly

Installation Manuals




36" CAT5e Cable

(8) 6-20 x 1.25" Screws




Ford Speed Sender Adapter




Control Box

Installation


1. Remove the stock instrument cluster from the dash. Retain all factory hardware for reassembly.

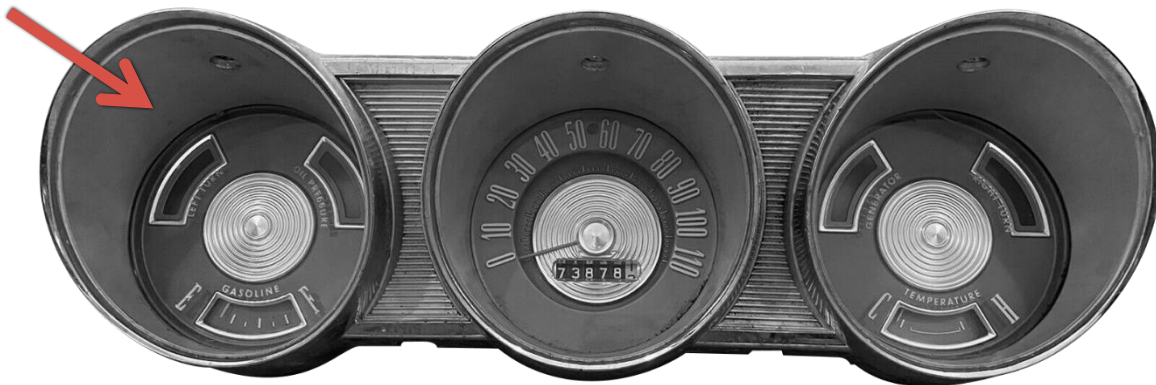


2. Separate the stock instrument cluster from its bezel by removing the eight screws below. Everything but the OEM bezel may be set aside, as these components will not be used with the VHX system.

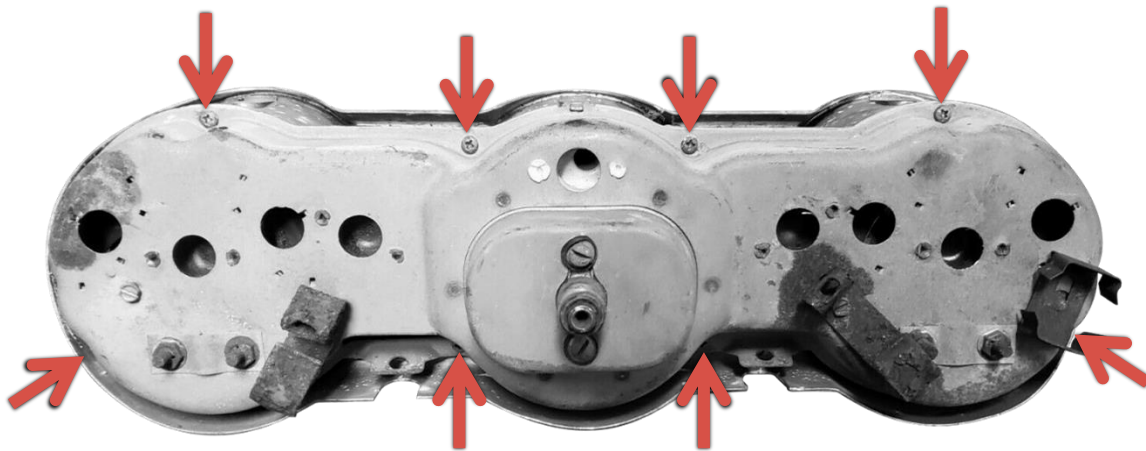


3. Mount the VHX system to the stock bezel using the (8) included 6-20 x 1.25" screws.

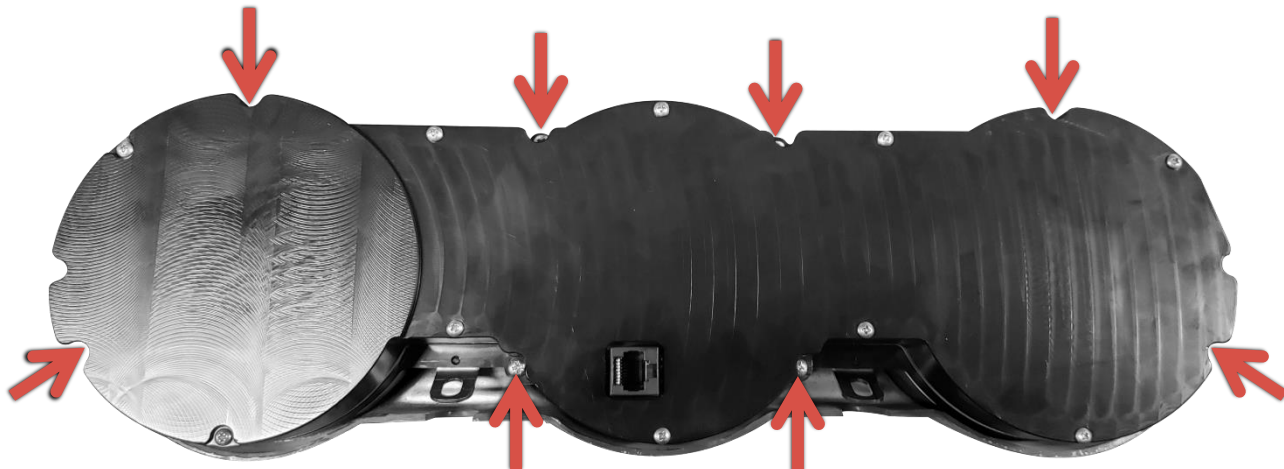

4. Attach the provided 36" CAT5e cable to the back of the VHX system. Carefully route the open end of this cable to the control box mounting location.

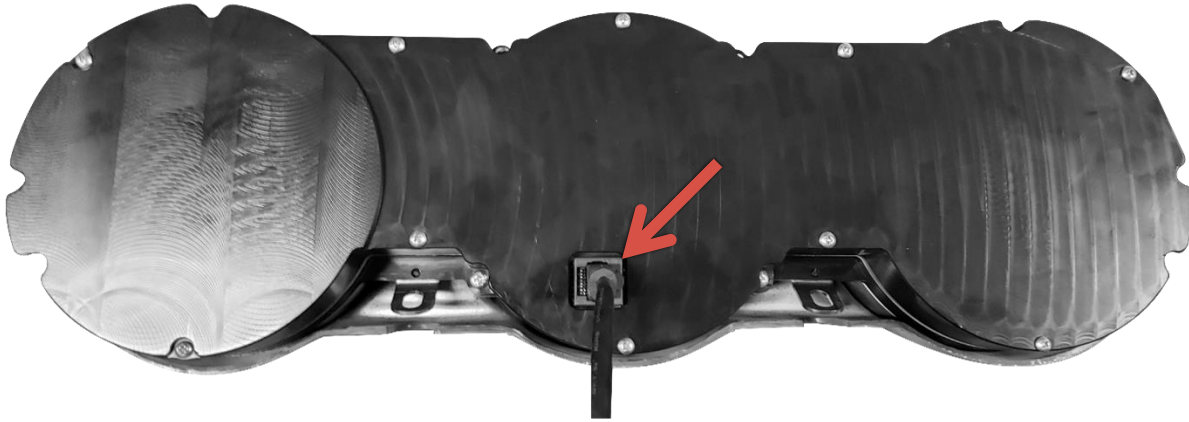

5. Mount the VHX system to the dash using the retained factory hardware. Refer to the main VHX manual for wiring instructions to complete the VHX installation.

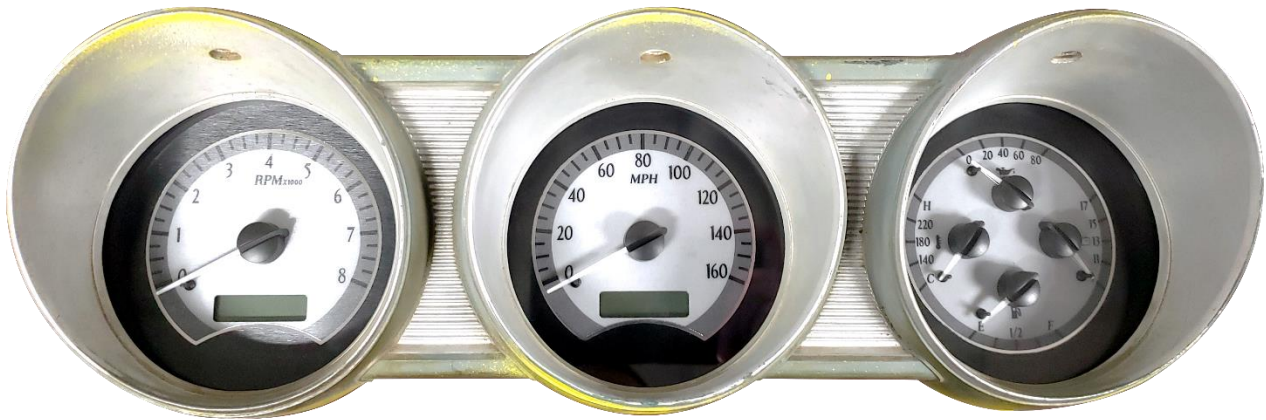

⚠ WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov



4510 W. 61st St. North
Sioux Falls, SD 57107
www.dakotadigital.com
dakotasupport@dakotadigital.com

Phone (605) 332-6513
Fax (605) 339-4106

© Copyright 2022 - Dakota Digital