

VLC-40C Dakota Digital VHX Clock Installation For 1940 Chevrolet Car

Your new VLC-40C kit includes:



## Installation

1. Disconnect and remove the original clock by removing the two screws on the backside.




2. With the original clock removed, carefully maneuver the VLC clock in place while centering the bezel. Secure the gauge with the supplied screws.



**Supplied Screws** 



3. Connect the CAT5 cable and the power harness to the clock. Route the other ends to the VHX control box. Refer to enclosed clock operating manual for these connections and setup.

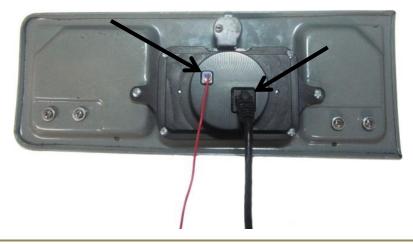

**WARNING:** This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <u>www.P65Warnings.ca.gov</u>



4510 W. 61st St. North<br/>Sioux Falls, SD 57107Phone (605) 332-6513<br/>Fax (605) 339-4106www.dakotadigital.com<br/>dakotasupport@dakotadigital.comCopyright 2011 - Dakota Digital, Inc.

Manual # 650523