



# VHX-70P-GTO

Dakota Digital VHX Instrument Installation  
For 1970-'72 GTO

Your new VHX-70P-GTO kit includes:

### VHX Display



Quad Mounting Tab  
Tach Mounting Tab

- (1) 6-32 X 7/8" Pan Head Screw
- (2) 8-32 X 1 1/4" Pan Head Screws
- (2) 8-32 Nuts




Universal Sender Pack



36" CAT5 Cable



12" CAT5 Cable

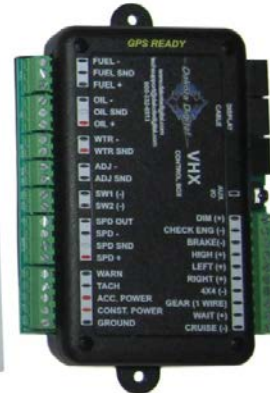

Control Box

## Installation

1. Remove the stock gauge cluster from the dash and save all hardware for reassembly.



- Remove the stock gauges from the bezel. The only items to be reused are the original front bezel and the hardware to mount the gauges; the other pieces can be set aside. Now is a good time to clean or refinish the bezel.



- Secure the Tach mounting tab to the VHX system's Tachometer as shown in the picture using the provided 6-32 X 7/8" screw, then mount the Tach to the bezel on the right side using the factory hardware. There is adjustment within the bracket; test fit to the bezel before final torqueing.



- Secure the Quad mounting tab to the bottom left mount of the Speed and Quad portion of the VHX system as shown in the picture using one of the provided 8-32 X 1 1/4" screws and nuts, then mount the gauge system to the bezel using the factory hardware. Again, there is adjustment within this bracket as well; please test fit to the bezel before final torqueing. Also, you will use the remaining 8-32 X 1 1/4" screw and nut to mount the bottom right tab (from front view) of the assembly to the Tach's mounting tab as shown with the dashed arrow.



6. Before the assembled cluster is installed back into the dash, connect one end of the 12" CAT5 cable to either jack on the Tach and the other end to the Speed assembly, then connect one end of the 36" CAT5 cable to the remaining open jack on the Tach. Use caution when routing the other end of this cable to the control box mounting location.



7. Re-install the bezel into the vehicle using stock hardware and refer to the main manual for wiring instructions to complete the VHX installation.



4510 W. 61<sup>st</sup> St. N., Sioux Falls SD 57107  
Phone: (605) 332-6513 Fax: (605) 339-4106  
[www.dakotadigital.com](http://www.dakotadigital.com)  
[dakotasupport@dakotadigital.com](mailto:dakotasupport@dakotadigital.com)