



VHX-84B-REG

Dakota Digital VHX Instrument Installation
For 1984-'87 Buick Regal

Your new VHX-84B-REG kit includes:

VHX Display



Universal
Sender Pack



Switch Assembly



Installation Manuals



CAT5 Cable



Control Box



Alternator Load Harness




Installation

1. Remove the gauge bezel from the dash. Now is a good time to clean the bezel.




*The bezel is held in by push-in clips. Note the locations of the clips on the back side of the bezel. Pull near clips when removing the bezel.

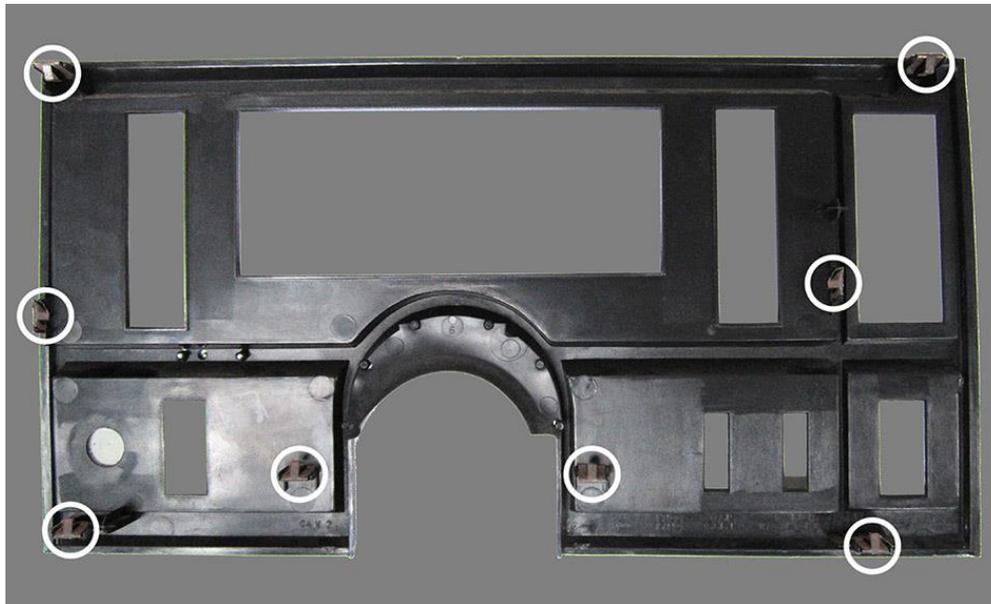


2. Remove the stock gauges by removing the four screws securing the gauges to the dash. A 7mm nut driver will work best for these screws. Keep the screws because they will be used to install the VHX gauges.




3. Connect the CAT5 cable to the system so it can be routed and connected to the control box as the instrument system is installed.

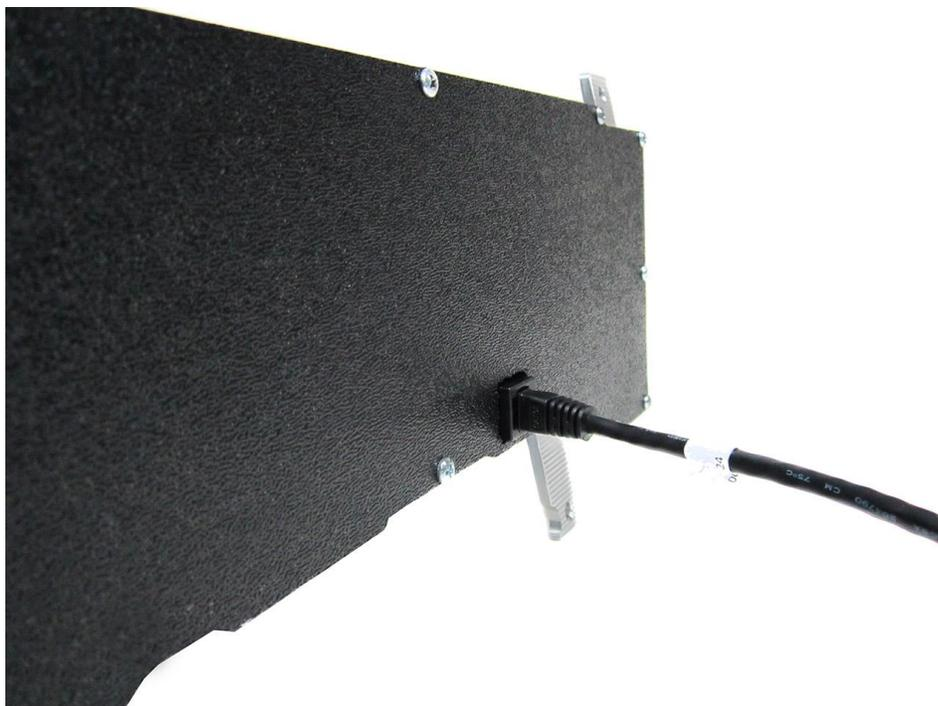

4. Install the VHX system into the dash. Align the four mounting holes and re-use the factory screws to fasten the VHX gauges into the dash.

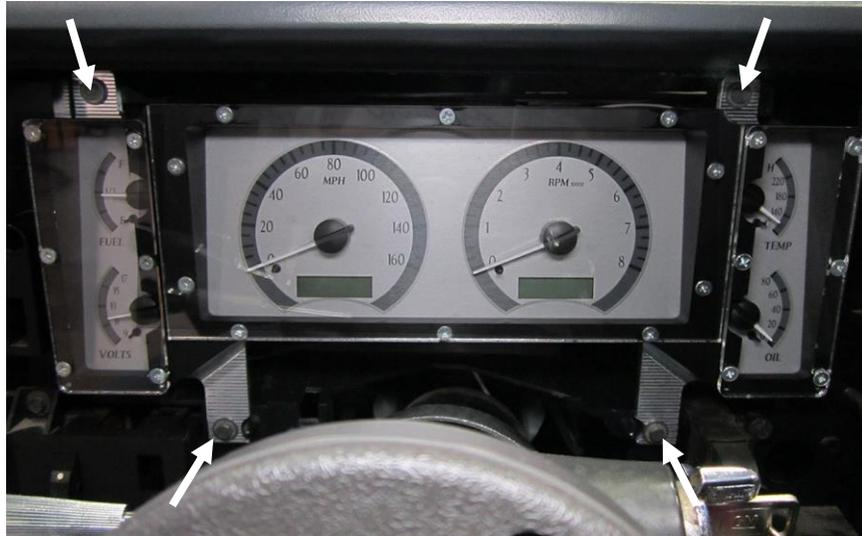

5. Re-install the gauge bezel and refer to the main manual for wiring instructions to complete the VHX installation.

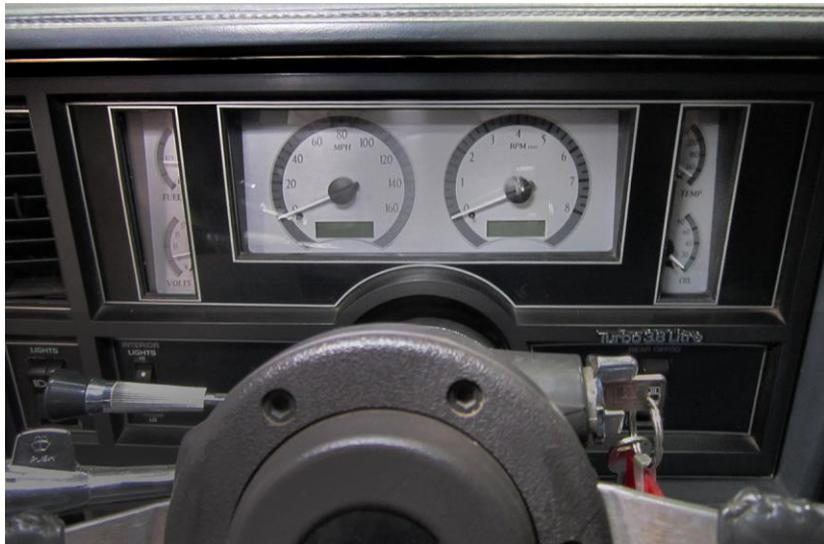

6. Stock charging systems will need an additional wiring connection at the gauge cluster connector. You will need to add a 300 to 500 ohm resistor between pin 3 (Brown wire) and Pin 15 (Pink/Black wire). The provided alternator load harness can be used to achieve this.

⚠WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov



4510 W. 61st St. North
Sioux Falls, SD 57107
www.dakotadigital.com
dakotasupport@dakotadigital.com

Phone (605) 332-6513
Fax (605) 339-4106

Copyright 2011 - Dakota Digital, Inc.